

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Feed-through terminal block, nom. voltage: 1000 V, nominal current: 41 A, number of connections: 4, connection method: Push-in connection, Rated cross section: 6 mm², cross section: 0.5 mm² - 10 mm², mounting type: NS 35/7,5, NS 35/15, color: blue

Your advantages

- The Push-in connection terminal blocks are characterized by the system features of the CLIPLINE complete system and by easy and tool-free wiring of conductors with ferrules or solid conductors
- In addition to the testing option in the double function shaft, all terminal blocks provide an additional test pick-off
- The compact design and front connection enable wiring in a confined space
- Tested for railway applications

Commercial data

Item number	3212947
Packing unit	50 pc
Minimum order quantity	50 pc
Product key	BE2213
GTIN	4046356538138
Weight per piece (including packing)	25.28 g
Weight per piece (excluding packing)	23.78 g
Customs tariff number	85369010
Country of origin	CN

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

Technical data

Product properties

Product type	Multi-conductor terminal block
Product family	PT
Area of application	Railway industry
	Machine building
	Plant engineering
Number of connections	4
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	8 kV
Maximum power dissipation for nominal condition	1.31 W

Connection data

Number of connections per level	4
Nominal cross section	6 mm ²
Connection method	Push-in connection
Stripping length	10 mm ... 12 mm
Internal cylindrical gage	A5
Connection in acc. with standard	IEC 60947-7-1
Conductor cross-section rigid	0.5 mm ² ... 10 mm ²
Cross section AWG	20 ... 8 (converted acc. to IEC)
Conductor cross-section flexible	0.5 mm ² ... 10 mm ²
Conductor cross-section, flexible [AWG]	20 ... 8 (converted acc. to IEC)
Conductor cross-section flexible ultrasound-compressed	0.34 mm ² ... 10 mm ²
Conductor cross-section, flexible [AWG] ultrasound-compressed	22 ... 8 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.5 mm ² ... 6 mm ²
Flexible conductor cross-section (ferrule with plastic sleeve)	0.5 mm ² ... 6 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 2.5 mm ² When using TWIN ferrules, we recommend a minimum ferrule length of 13 mm.
Nominal current	41 A
Maximum load current	52 A (with 10 mm ² conductor cross-section, rigid)
Nominal voltage	1000 V
Nominal cross section	6 mm ²

Connection cross sections directly pluggable

Conductor cross-section rigid	1 mm ² ... 10 mm ²
Conductor cross-section flexible (ferrule without plastic sleeve)	1 mm ² ... 6 mm ²

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

Flexible conductor cross-section (ferrule with plastic sleeve)	1 mm ² ... 6 mm ²
--	---

Ex data

Rated data (ATEX/IECEX)

Identification	Ex II 2 GD Ex eb IIC Gb
Operating temperature range (1)	-60 °C ... 85 °C
Operating temperature range (2)	-40 °C ... 110 °C
Ex-certified accessories	3212963 D-PT 6-QUATTRO
	1204520 SZF 2-0,8X4,0
	3022276 CLIPFIX 35-5
	3022218 CLIPFIX 35
List of bridges	Plug-in bridge / FBS 2-8 / 3030284
	Plug-in bridge / FBS 3-8 / 3030297
	Plug-in bridge / FBS 4-8 / 3030307
	Plug-in bridge / FBS 5-8 / 3030310
	Plug-in bridge / FBS 10-8 / 3030323
Bridge data	35 A (6 mm ²)
Ex temperature increase	40 K (36 A/6 mm ²)
for bridging with bridge	550 V
- At bridging between non-adjacent terminal blocks	275 V
- At bridging between non-adjacent terminal blocks via PE terminal block	275 V
- At cut-to-length bridging	220 V
- At cut-to-length bridging with cover	275 V
Rated insulation voltage	500 V
output	(Permanent)

Ex level General

Rated voltage	550 V
Rated current	36 A
Maximum load current	45 A
Contact resistance	0.65 mΩ

Ex connection data General

Nominal cross section	6 mm ²
Rated cross section AWG	10
Connection capacity rigid	0.5 mm ² ... 10 mm ²
Connection capacity AWG	20 ... 8
Connection capacity flexible	0.5 mm ² ... 6 mm ²
Connection capacity AWG	20 ... 10

Dimensions

Width	8.2 mm
End cover width	2.2 mm
Height	90.5 mm

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

Depth	42.2 mm
Depth on NS 35/7,5	43.5 mm
Depth on NS 35/15	51 mm

Material specifications

Color	blue (RAL 5015)
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Environmental and real-life conditions

Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Spectrum	Long life test category 2, bogie-mounted
Frequency	$f_1 = 5 \text{ Hz}$ to $f_2 = 250 \text{ Hz}$
ASD level	6.12 (m/s ²) ² /Hz
Acceleration	3.12g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Result	Test passed

Shocks

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Pulse shape	Half-sine
Acceleration	30g
Shock duration	18 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed

Ambient conditions

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15

PT 6-QUATTRO BU - Feed-through terminal block




3212947

<https://www.phoenixcontact.com/pc/products/3212947>

Drawings

Circuit diagram

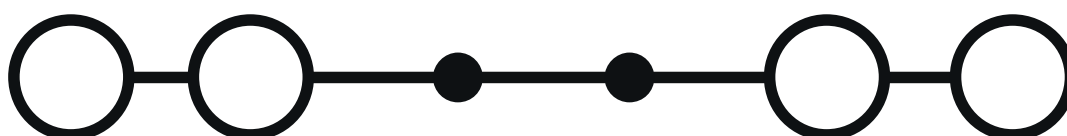

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/3212947>

 CSA Approval ID: 2030668				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
B	600 V	40 A	20 - 8	-
C	600 V	40 A	20 - 8	-
D	600 V	5 A	20 - 8	-

 IECEE CB Scheme Approval ID: DE1-64280				
--	--	--	--	--

 EAC Approval ID: RU C-DE.BL08.B.00644				
---	--	--	--	--

 cULus Recognized Approval ID: E60425				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
B	600 V	40 A	20 - 8	-
C	600 V	40 A	20 - 8	-
F	1000 V	40 A	20 - 8	-

 LR Approval ID: LR2371832TA				
---	--	--	--	--

 NK Approval ID: 22ME0007				
--	--	--	--	--

 VDE Zeichengenehmigung Approval ID: 40035239				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
keine				

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

Only flexible conductors	1000 V	41 A	-	0.5 - 6
Only rigid conductors	1000 V	41 A	-	0.5 - 10



PRs

Approval ID: TE/2107/880590/21

ABS

Approval ID: 21-2192245-PDA

DNV

Approval ID: TAE000010T



cUL Recognized

Approval ID: E192998

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
keine				
	550 V	40 A	20 - 8	-



EAC Ex

Approval ID: RU C-DE.AB72.B.02351



IEC Ex

Approval ID: IECEx SEV13.0005U



UL Recognized

Approval ID: E192998

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
keine				
	550 V	40 A	20 - 8	-



ATEX

Approval ID: SEV13ATEX0159U



CCC

Approval ID: 2020322313000631

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>



EAC Ex

Approval ID: KZ 7500525010101950

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

Classifications

ECLASS

ECLASS-13.0	27250101
ECLASS-15.0	27250101

ETIM

ETIM 9.0	EC000897
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

Accessories

i Note: Applying some accessories below might limit this product.

FBS 2-8 - Plug-in bridge

3030284

<https://www.phoenixcontact.com/pc/products/3030284>



Plug-in bridge, pitch: 8.2 mm, number of positions: 2, color: red

i Max. current carrying capacity: 41 A

FBS 3-8 - Plug-in bridge

3030297

<https://www.phoenixcontact.com/pc/products/3030297>



Plug-in bridge, pitch: 8.2 mm, number of positions: 3, color: red

i Max. current carrying capacity: 41 A

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

FBS 4-8 - Plug-in bridge

3030307

<https://www.phoenixcontact.com/pc/products/3030307>



Plug-in bridge, pitch: 8.2 mm, number of positions: 4, color: red

 Max. current carrying capacity: 41 A

FBS 5-8 - Plug-in bridge

3030310

<https://www.phoenixcontact.com/pc/products/3030310>



Plug-in bridge, pitch: 8.2 mm, number of positions: 5, color: red

 Max. current carrying capacity: 41 A

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

FBS 6-8 - Plug-in bridge

3032470

<https://www.phoenixcontact.com/pc/products/3032470>



Plug-in bridge, pitch: 8.2 mm, number of positions: 6, color: red

 Max. current carrying capacity: 41 A

FBS 10-8 - Plug-in bridge

3030323

<https://www.phoenixcontact.com/pc/products/3030323>



Plug-in bridge, pitch: 8.2 mm, number of positions: 10, color: red

 Max. current carrying capacity: 41 A

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

FBS 2-8 CT - Plug-in bridge

3033830

<https://www.phoenixcontact.com/pc/products/3033830>



Plug-in bridge, pitch: 8.2 mm, number of positions: 2, color: orange

 Max. current carrying capacity: 41 A

FBS 3-8 CT - Plug-in bridge

3033831

<https://www.phoenixcontact.com/pc/products/3033831>



Plug-in bridge, pitch: 8.2 mm, number of positions: 3, color: orange

 Max. current carrying capacity: 41 A

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

FBS 4-8 CT - Plug-in bridge

3033832

<https://www.phoenixcontact.com/pc/products/3033832>



Plug-in bridge, pitch: 8.2 mm, number of positions: 4, color: orange

 Max. current carrying capacity: 41 A

FBS 10-8 CT - Plug-in bridge

3033833

<https://www.phoenixcontact.com/pc/products/3033833>



Plug-in bridge, pitch: 8.2 mm, number of positions: 10, color: orange

 Max. current carrying capacity: 41 A

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

FBS 2-8 BU - Plug-in bridge

3032567

<https://www.phoenixcontact.com/pc/products/3032567>



Plug-in bridge, pitch: 8.2 mm, number of positions: 2, color: blue

 Max. current carrying capacity: 41 A

FBS 3-8 BU - Plug-in bridge

3032570

<https://www.phoenixcontact.com/pc/products/3032570>



Plug-in bridge, pitch: 8.2 mm, number of positions: 3, color: blue

 Max. current carrying capacity: 41 A

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

FBS 4-8 BU - Plug-in bridge

3032583

<https://www.phoenixcontact.com/pc/products/3032583>



Plug-in bridge, pitch: 8.2 mm, number of positions: 4, color: blue

 Max. current carrying capacity: 41 A

FBS 5-8 BU - Plug-in bridge

3032596

<https://www.phoenixcontact.com/pc/products/3032596>



Plug-in bridge, pitch: 8.2 mm, number of positions: 5, color: blue

 Max. current carrying capacity: 41 A

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

FBS 6-8 BU - Plug-in bridge

3032677

<https://www.phoenixcontact.com/pc/products/3032677>



Plug-in bridge, pitch: 8.2 mm, number of positions: 6, color: blue

 Max. current carrying capacity: 41 A

FBS 10-8 BU - Plug-in bridge

3032606

<https://www.phoenixcontact.com/pc/products/3032606>



Plug-in bridge, pitch: 8.2 mm, number of positions: 10, color: blue

 Max. current carrying capacity: 41 A

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

FBS 2-8 GY - Plug-in bridge

3032621

<https://www.phoenixcontact.com/pc/products/3032621>



Plug-in bridge, pitch: 8.2 mm, number of positions: 2, color: gray

 Max. current carrying capacity: 41 A

FBS 3-8 GY - Plug-in bridge

3032622

<https://www.phoenixcontact.com/pc/products/3032622>



Plug-in bridge, pitch: 8.2 mm, number of positions: 3, color: gray

 Max. current carrying capacity: 41 A

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

FBS 4-8 GY - Plug-in bridge

3032635

<https://www.phoenixcontact.com/pc/products/3032635>



Plug-in bridge, pitch: 8.2 mm, number of positions: 4, color: gray

 Max. current carrying capacity: 41 A

FBS 5-8 GY - Plug-in bridge

3032648

<https://www.phoenixcontact.com/pc/products/3032648>



Plug-in bridge, pitch: 8.2 mm, number of positions: 5, color: gray

 Max. current carrying capacity: 41 A

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

FBS 6-8 GY - Plug-in bridge

3032664

<https://www.phoenixcontact.com/pc/products/3032664>

Plug-in bridge, pitch: 8.2 mm, number of positions: 6, color: gray



 Max. current carrying capacity: 41 A

FBS 10-8 GY - Plug-in bridge

3032651

<https://www.phoenixcontact.com/pc/products/3032651>

Plug-in bridge, pitch: 8.2 mm, number of positions: 10, color: gray



 Max. current carrying capacity: 41 A

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

FBSRH 2-8 - Short-circuit connector

3033802

<https://www.phoenixcontact.com/pc/products/3033802>



Short-circuit connector, pitch: 8.2 mm, number of positions: 2, color: red

 Max. current carrying capacity: 32 A

FBSRH 3-8 - Short-circuit connector

3033803

<https://www.phoenixcontact.com/pc/products/3033803>



Short-circuit connector, pitch: 8.2 mm, number of positions: 3, color: red

 Max. current carrying capacity: 32 A

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

FBSRH 4-8 - Short-circuit connector

3033804

<https://www.phoenixcontact.com/pc/products/3033804>



Short-circuit connector, pitch: 8.2 mm, number of positions: 4, color: red

 Max. current carrying capacity: 32 A

FBSR 2-8 - Plug-in bridge

3033808

<https://www.phoenixcontact.com/pc/products/3033808>



Plug-in bridge, pitch: 8.2 mm, number of positions: 2, color: red

 Max. current carrying capacity: 32 A

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

FBSR 3-8 - Plug-in bridge

3001597

<https://www.phoenixcontact.com/pc/products/3001597>



Plug-in bridge, pitch: 8.2 mm, number of positions: 3, color: red

 Max. current carrying capacity: 32 A

FBSR 4-8 - Plug-in bridge

3000585

<https://www.phoenixcontact.com/pc/products/3000585>



Plug-in bridge, pitch: 8.2 mm, number of positions: 4, color: red

 Max. current carrying capacity: 32 A

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

FBSR 5-8 - Plug-in bridge

3033809

<https://www.phoenixcontact.com/pc/products/3033809>



Plug-in bridge, pitch: 8.2 mm, number of positions: 5, color: red

 Max. current carrying capacity: 32 A

FBSR 10-8 - Plug-in bridge

3001599

<https://www.phoenixcontact.com/pc/products/3001599>



Plug-in bridge, pitch: 8.2 mm, number of positions: 10, color: red

 Max. current carrying capacity: 32 A

PT 6-QUATTRO BU - Feed-through terminal block




3212947

<https://www.phoenixcontact.com/pc/products/3212947>

FBSR 16-8 - Plug-in bridge

3033816

<https://www.phoenixcontact.com/pc/products/3033816>



Plug-in bridge, pitch: 8.2 mm, number of positions: 16, color: red

 Max. current carrying capacity: 32 A

SB-MER 2-8 - Bridge bar

3000587

<https://www.phoenixcontact.com/pc/products/3000587>



Bridge bar, pitch: 8.2 mm, number of positions: 2, length: 25 mm, color: gray/orange

 Max. current carrying capacity: 24 A

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

SB-MER 3-8 - Bridge bar

3000588

<https://www.phoenixcontact.com/pc/products/3000588>



Bridge bar, pitch: 8.2 mm, number of positions: 3, length: 25 mm, color: gray/orange

 Max. current carrying capacity: 24 A

SB-MER 4-8 - Bridge bar

3000589

<https://www.phoenixcontact.com/pc/products/3000589>



Bridge bar, pitch: 8.2 mm, number of positions: 4, length: 25 mm, color: gray/orange

 Max. current carrying capacity: 24 A

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

RB ST 6-(2,5/4) - Reducing bridge

3030860

<https://www.phoenixcontact.com/pc/products/3030860>



Reducing bridge, pitch: 9 mm, number of positions: 2, length: 30 mm, color: red

 Max. current carrying capacity: 35 A

RB 16-6 - Reducing bridge

3047072

<https://www.phoenixcontact.com/pc/products/3047072>



Reducing bridge, pitch: 12.2 mm, number of positions: 2, color: red

 Max. current carrying capacity: 37 A

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

RB ST 6-1,5/S - Reducing bridge

3213250

<https://www.phoenixcontact.com/pc/products/3213250>



Reducing bridge, pitch: 8 mm, number of positions: 2, length: 30 mm, color: red

 Max. current carrying capacity: 24 A

D-PT 6-QUATTRO - End cover

3212963

<https://www.phoenixcontact.com/pc/products/3212963>

End cover, depth: 36 mm, width: 2.2 mm, height: 90.5 mm, color: gray



PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

WS PT 6 - Warning label

1029029

<https://www.phoenixcontact.com/pc/products/1029029>



Warning label, yellow/black, labeled: Lightning flash, mounting type: plug in, for terminal block width: 8.2 mm

LPS-8/E - Service connector

3270560

<https://www.phoenixcontact.com/pc/products/3270560>



Service connector, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: red

PT 6-QUATTRO BU - Feed-through terminal block

3212947

<https://www.phoenixcontact.com/pc/products/3212947>

LPS-8 - Service connector

3270561

<https://www.phoenixcontact.com/pc/products/3270561>



Service connector, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: red

LPO 6/E - Pick-off plug

3270525

<https://www.phoenixcontact.com/pc/products/3270525>



Pick-off plug, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

LPO 6 - Pick-off plug

3270526

<https://www.phoenixcontact.com/pc/products/3270526>



Pick-off plug, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray

NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/pc/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/pc/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver-colored

NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/pc/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver-colored

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/pc/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver-colored

NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/pc/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver-colored

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/pc/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver-colored

NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/pc/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver-colored

PT 6-QUATTRO BU - Feed-through terminal block

3212947

<https://www.phoenixcontact.com/pc/products/3212947>



NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/pc/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/pc/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/pc/products/1201730>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver-colored

NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/pc/products/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver-colored

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/pc/products/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: white

NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/pc/products/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver-colored

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/pc/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver-colored

NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/pc/products/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver-colored

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/pc/products/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver-colored

NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/pc/products/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/pc/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/pc/products/1201798>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver-colored

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

ZB 8:UNBEDRUCKT - Zack marker strip

1052002

<https://www.phoenixcontact.com/pc/products/1052002>




Zack marker strip, Strip, white, unmarked, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: latching, for terminal block width: 8.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 8.15 mm

ZB 8 CUS - Zack marker strip

0825011

<https://www.phoenixcontact.com/pc/products/0825011>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, Number of individual labels: 10, text field height: 8.15 mm, text field width: 10.5 mm

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

UC-TM 8 - Marker for terminal blocks

0818072

<https://www.phoenixcontact.com/pc/products/0818072>



Marker for terminal blocks, Sheet, white, unmarked, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: latching, for terminal block width: 8.2 mm, Number of individual labels: 56, text field height: 10.5 mm, text field width: 7.6 mm

UC-TM 8 CUS - Marker for terminal blocks

0824597

<https://www.phoenixcontact.com/pc/products/0824597>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, Number of individual labels: 56, text field height: 10.5 mm, text field width: 7.6 mm

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

UCT-TM 8 - Marker for terminal blocks

0828740

<https://www.phoenixcontact.com/pc/products/0828740>



Marker for terminal blocks, Sheet, white, unmarked, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME 2.0, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, TOPMARK NEO, TOPMARK LASER, mounting type: latching, for terminal block width: 8.2 mm, Number of individual labels: 42, text field height: 10.5 mm, text field width: 7.6 mm

UCT-TM 8 CUS - Marker for terminal blocks

0829616

<https://www.phoenixcontact.com/pc/products/0829616>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, Number of individual labels: 42, text field height: 10.5 mm, text field width: 7.6 mm

PT 6-QUATTRO BU - Feed-through terminal block




3212947

<https://www.phoenixcontact.com/pc/products/3212947>

ZB 8,LGS:FORTL.ZAHLEN - Zack marker strip

1052015

<https://www.phoenixcontact.com/pc/products/1052015>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: latching, for terminal block width: 8.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 8.15 mm

ZB 8,QR:FORTL.ZAHLEN - Zack marker strip

1052028

<https://www.phoenixcontact.com/pc/products/1052028>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: latching, for terminal block width: 8.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 8.15 mm

PT 6-QUATTRO BU - Feed-through terminal block




3212947

<https://www.phoenixcontact.com/pc/products/3212947>

ZB 8,LGS:L1-N,PE - Marker for terminal blocks

1052413

<https://www.phoenixcontact.com/pc/products/1052413>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: latching, for terminal block width: 8.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 8.15 mm

ZBF 8:UNBEDRUCKT - Zack Marker strip, flat

0808781

<https://www.phoenixcontact.com/pc/products/0808781>



Zack Marker strip, flat, Strip, white, unmarked, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: latching, for terminal block width: 8 mm, Number of individual labels: 10, text field height: 8.15 mm, text field width: 5.15 mm

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

ZBF 8 CUS - Zack Marker strip, flat

0825030

<https://www.phoenixcontact.com/pc/products/0825030>



Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 8 mm, Number of individual labels: 10, text field height: 8.15 mm, text field width: 5.15 mm

ZBF 8,LGS:FORTL.ZAHLEN - Zack Marker strip, flat

0808804

<https://www.phoenixcontact.com/pc/products/0808804>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 101 ... 110, mounting type: latching, for terminal block width: 8 mm, Number of individual labels: 10, text field height: 8.15 mm, text field width: 5.15 mm

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

UC-TMF 8 - Marker for terminal blocks

0818137

<https://www.phoenixcontact.com/pc/products/0818137>



Marker for terminal blocks, Sheet, white, unmarked, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: latching, for terminal block width: 8.2 mm, Number of individual labels: 56, text field height: 5.1 mm, text field width: 7.6 mm

UC-TMF 8 CUS - Marker for terminal blocks

0824654

<https://www.phoenixcontact.com/pc/products/0824654>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 8.2 mm, Number of individual labels: 56, text field height: 5.1 mm, text field width: 7.6 mm

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

UCT-TMF 8 - Marker for terminal blocks

0828748

<https://www.phoenixcontact.com/pc/products/0828748>



Marker for terminal blocks, Sheet, white, unmarked, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME 2.0, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, TOPMARK NEO, TOPMARK LASER, mounting type: latching, for terminal block width: 8.2 mm, Number of individual labels: 42, text field height: 4.7 mm, text field width: 7.4 mm

UCT-TMF 8 CUS - Marker for terminal blocks

0829672

<https://www.phoenixcontact.com/pc/products/0829672>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 8.2 mm, Number of individual labels: 42, text field height: 4.7 mm, text field width: 7.4 mm

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

MPS-MT - Test plug

0201744

<https://www.phoenixcontact.com/pc/products/0201744>



Test plug, with solder connection up to 1 mm² conductor cross-section, number of positions: 1, color: gray

MPS-IH WH - Insulating sleeve

0201663

<https://www.phoenixcontact.com/pc/products/0201663>

Insulating sleeve, color: white



PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

MPS-IH RD - Insulating sleeve

0201676

<https://www.phoenixcontact.com/pc/products/0201676>

Insulating sleeve, color: red




MPS-IH BU - Insulating sleeve

0201689

<https://www.phoenixcontact.com/pc/products/0201689>

Insulating sleeve, color: blue



PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

MPS-IH YE - Insulating sleeve

0201692

<https://www.phoenixcontact.com/pc/products/0201692>

Insulating sleeve, color: yellow



MPS-IH GN - Insulating sleeve

0201702

<https://www.phoenixcontact.com/pc/products/0201702>

Insulating sleeve, color: green



PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

MPS-IH GY - Insulating sleeve

0201728

<https://www.phoenixcontact.com/pc/products/0201728>

Insulating sleeve, color: gray



MPS-IH BK - Insulating sleeve

0201731

<https://www.phoenixcontact.com/pc/products/0201731>

Insulating sleeve, color: black



PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

PAI-4-FIX BU - Test adapter

3032729

<https://www.phoenixcontact.com/pc/products/3032729>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, number of positions: 1, color: blue

PAI-4-FIX OG - Test adapter

3034455

<https://www.phoenixcontact.com/pc/products/3034455>



4 mm test adapter, for terminal blocks with 8.2 mm pitch

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

PAI-4-FIX YE - Test adapter

3032745

<https://www.phoenixcontact.com/pc/products/3032745>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, number of positions: 1, color: yellow

PAI-4-FIX RD - Test adapter

3032732

<https://www.phoenixcontact.com/pc/products/3032732>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, number of positions: 1, color: red

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

PAI-4-FIX GN - Test adapter

3032758

<https://www.phoenixcontact.com/pc/products/3032758>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, number of positions: 1, color: green

PAI-4-FIX BK - Test adapter

3032774

<https://www.phoenixcontact.com/pc/products/3032774>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, number of positions: 1, color: black

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

PAI-4-FIX GY - Test adapter

3032790

<https://www.phoenixcontact.com/pc/products/3032790>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, number of positions: 1, color: gray

PAI-4-FIX VT - Test adapter

3032761

<https://www.phoenixcontact.com/pc/products/3032761>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, number of positions: 1, color: violet

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

PAI-4-FIX BN - Test adapter

3032787

<https://www.phoenixcontact.com/pc/products/3032787>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, number of positions: 1, color: brown

PAI-4-FIX WH - Test adapter

3032797

<https://www.phoenixcontact.com/pc/products/3032797>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, number of positions: 1, color: white

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

PAIS-4-FIX GY - Test adapter

3032791

<https://www.phoenixcontact.com/pc/products/3032791>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, number of positions: 1, color: gray

PAIS-4-FIX BK - Test adapter

3032792

<https://www.phoenixcontact.com/pc/products/3032792>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, number of positions: 1, color: black

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

PAIS-4-FIX RD - Test adapter

3032793

<https://www.phoenixcontact.com/pc/products/3032793>



Test adapter, Do not plug in while the power is connected, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, number of positions: 1, color: red

PAIS-4-FIX BU - Test adapter

3032798

<https://www.phoenixcontact.com/pc/products/3032798>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, number of positions: 1, color: blue

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

PAIS-4-FIX YE - Test adapter

3032799

<https://www.phoenixcontact.com/pc/products/3032799>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, number of positions: 1, color: yellow

PAIS-4-FIX GN - Test adapter

3032801

<https://www.phoenixcontact.com/pc/products/3032801>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, number of positions: 1, color: green

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

PAIS-4-FIX VT - Test adapter

3032802

<https://www.phoenixcontact.com/pc/products/3032802>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, number of positions: 1, color: violet

PS-8 - Test plug

3031005

<https://www.phoenixcontact.com/pc/products/3031005>



Test plug, Modular test plug, number of positions: 1, color: red

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

DP PS-8 - Spacer plate

3036741

<https://www.phoenixcontact.com/pc/products/3036741>



Spacer plate, depth: 29 mm, width: 8.2 mm, height: 22.4 mm, number of positions: 1, color: red

PS-8/2,3MM RD - Test plug

3048564

<https://www.phoenixcontact.com/pc/products/3048564>



Test plug, number of positions: 1, color: red

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

TMT (EX9,5)R - Marker for terminal blocks

0828295

<https://www.phoenixcontact.com/pc/products/0828295>



Marker for terminal blocks, Roll, white, unmarked, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, mounting type: latching, snap into tall marker groove, for terminal block width: 30000 mm, Number of individual labels: 1, roll length: 30 m, text field height: 9.5 mm, text field width: 50000 mm

US-TM 100 - Marker for terminal blocks

0829255

<https://www.phoenixcontact.com/pc/products/0829255>



Marker for terminal blocks, Card, white, unmarked, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, THERMOMARK PRIME 2.0, mounting type: latching, Number of individual labels: 13, text field height: 9.8 mm, text field width: 104 mm

PT 6-QUATTRO BU - Feed-through terminal block



3212947

<https://www.phoenixcontact.com/pc/products/3212947>

SZF 2-0,8X4,0 - Screwdriver

1204520

<https://www.phoenixcontact.com/pc/products/1204520>



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.8 x 4.0 x 100 mm, 2-component grip, with non-slip grip

PROJECT COMPLETE - Software

1050453

<https://www.phoenixcontact.com/pc/products/1050453>



Intuitive planning and marking software for configuring terminal strips and for professional marking of marking materials for terminal blocks, conductors, cables, devices, and systems. The software is available for download

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

info@phoenixcontact.com