34130 ✔ ACTIVE


SOLISTRAND

TE Internal #: 34130

Parallel Splice, 22 – 16 AWG, .26 – 1.65 mm² Wire, 509 – 3260 CMA, Uninsulated, Serrated, Copper, 7.65 mm [.301 in] Length, Loose Piece, Closed Barrel

View on TE.com >

Terminals & Splices > Splices

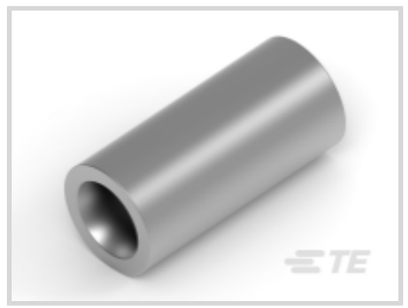





Splice Type: **Parallel Splice**

Wire Size: **.26 – 1.65 mm²**

Sealable: **No**

Splice Features: **Serrated**

Features

Product Type Features

Splice Accessory Type	Splice
Splice Type	Parallel Splice
Sealable	No
Compatible With Discrete Wire Type	Solid, Stranded
Wire Insulation Support Retention Type	Non-Insulation Support

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire

Body Features

Product Weight	.417 g
Splice Features	Serrated

Contact Features

	100 µin
Terminal Plating Material	Tin
Contact Base Material	Copper

Barrel Type	Closed

Mechanical Attachment

Wire Insulation Support	Without

Dimensions

Outside Diameter	3.58 mm[.141 in]
Wire Size	509 – 3260 CMA
Barrel Inside Diameter	1.55 mm[.061 in]
Terminal Material Thickness	.84 mm[.033 in]
Product Length	7.65 mm[.301 in]

Usage Conditions

Insulation Option	Uninsulated

Operation/Application

Compatible With Wire Base Material	Copper

Industry Standards

Government Qualified Splice	No

Packaging Features

Packaging Quantity	1000
Packaging Method	Loose Piece

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # 525693
DAHT SOLIS 22-10 ASSY



TE Part # 58545-3
SDE DIE ASSY. 22-10 SOLISTRAND



TE Part # 58545-1
SOLISTRAND 10-22 DIE ASSY




TE Part # 169400
CERTI-LOK FRAME W/O DIES



TE Part # 58546-1
PC 22-10 SOLISSPICE SPL I SHT



TE Part # 49935
DAHT SOLIS 22-10 ASSY

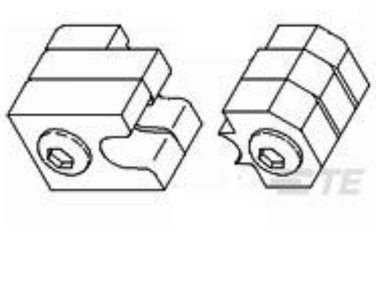


TE Part # 47812
DIES SOLIS 22-16 DIE SET

Customers Also Bought

TE Part #75073-754S
RECP ASSY



TE Part #TCD14745101-005
M12D4-MS-RJ-PUR-22SH-TYPE C GREEN-5.0M

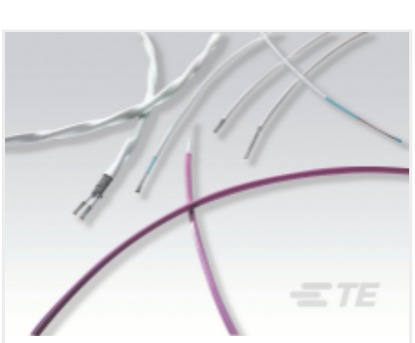

TE Part #6594333001
55A0111-22-45


TE Part #RSM07-7-15S-059
PLUG ASSY



TE Part #2-35653-1
SPLICE,N CE 22-10




TE Part #350561-2
UMNL PIN 24-18 .0126 AU/BR



TE Part #2286121-1
MULTIGIG RT2-R, DC, SPACE VPX MODULE 16E



TE Part #044782-000
NPVF050VT-100

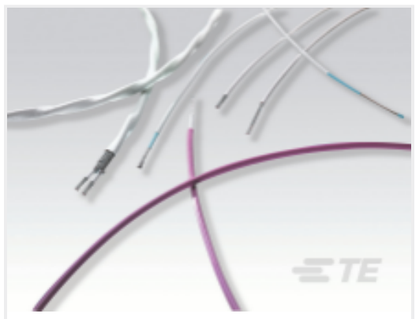

TE Part #EM0581-000
55A1111-22-9-9CS3477



TE Part #2-1102467-7
HD-K.16.STO.1.21.G

Documents

Product Drawings

SPLICE,SOLIS PARA 22-16

English

CAD Files

Customer View Model

ENG_CVM_CVM_34130_L.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_34130_L.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_34130_L.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals

UL Report

English

UL Report

English