
Part Number : 349618387
Product Description : Mini50 Unsealed Right-Angle Header, UL 94 HB, 38 Circuits, Polarization B, Gray, Tape and Reel
Series Number : 34961
Status : Active
Product Category : PCB Headers and Receptacles

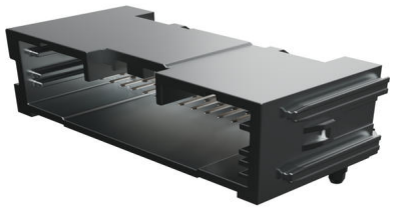

Documents and Resources

Drawings

349618387_sd.pdf

PK-47799-0001-001.pdf

STEP AP242

SOLIDWORKS

Creo

Symbol and Footprint (Multi-Format)

Specifications

PS-34959-001-001.pdf

TS-34961-001-001.pdf

Product Environment Compliance

Compliance

GADSL/IMDS	Compliant with Exemption 44; 33
China RoHS	Not Relevant
EU ELV	Compliant per 2000/53/EC
Low-Halogen Status	Not Relevant
REACH SVHC	Not Contained per D(2025)6375-DC (05 Nov 2025)
EU RoHS	Compliant per EU 2015/863

Compliance Statements

- EU RoHS
- REACH SVHC

- Low-Halogen

Industry Documents
- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

Substances of Interest
- PFAS

EU RoHS Certificate of Compliance

Additional Product Compliance Information

Part Details

General

Status	Active
Category	PCB Headers and Receptacles
Series	34961
Description	Mini50 Unsealed Right-Angle Header, UL 94 HB, 38 Circuits, Polarization B, Gray, Tape and Reel
Application	Automotive, Power, Signal, Wire-to-Board
Comments	38 x 0.50mm blades = 4.0A
Component Type	PCB Header
Product Name	Mini50
UPC	195842848320

Electrical

Current - Maximum per Contact	4.0A
Voltage - Maximum	500V DC

Physical

Breakaway	No
Circuits (Loaded)	38
Circuits (maximum)	38
Color - Resin	Gray

Durability (mating cycles max)	10
First Mate / Last Break	No
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	SPS
Net Weight	6.300/g
Number of Rows	3
Orientation	Right Angle
Packaging Type	Embossed Tape on Reel
PCB Locator	Yes
PCB Retention	None
PC Tail Length	2.75mm
Pitch - Mating Interface	2.00mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Stackable	Yes
Temperature Range - Operating	-40° to +105°C
Termination Interface Style	Through Hole

Mates With / Use With

Mates with Part(s)

Description	Part Number
Mini50 Unsealed Receptacle, 3 Rows, without CPA, 38 Circuits, Polarization Option B, Gray	349590391
Mini50 Unsealed Receptacle, 3 Rows, with CPA, 38 Circuits, Polarization Option B, Gray	349590384