



Terminals & Splices > Splices



Splice Type: **Parallel Splice**

Wire Size: **80 – 95 mm²**

Sealable: **No**

Splice Features: **Standard**

Features

Product Type Features

Splice Accessory Type	Splice
Splice Type	Parallel Splice
Sealable	No
Compatible With Discrete Wire Type	Solid, Stranded
Wire Insulation Support Retention Type	Non-Insulation Support

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

Body Features

Product Weight	22.025 g
Splice Features	Standard

Contact Features

	100 μin
Terminal Plating Material	Tin
Contact Base Material	Copper

Barrel Type	Closed
-------------	--------

Mechanical Attachment

Wire Insulation Support	Without
-------------------------	---------

Dimensions

Outside Diameter	19.69 mm[.775 in]
Wire Size	150500 – 190000 CMA
Barrel Inside Diameter	14.35 mm[.565 in]
Terminal Material Thickness	2.39 mm[.094 in]
Product Length	19.02 mm[.749 in]

Usage Conditions

Insulation Option	Uninsulated
-------------------	-------------

Operation/Application

Compatible With Wire Base Material	Copper
------------------------------------	--------

Industry Standards

Government Qualified Splice	No
-----------------------------	----

Packaging Features

Packaging Quantity	50
Packaging Method	Loose Piece

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 1490413-7
HYP10 SOLIS 3/0AWG NEST

TE Part # 1490414-3
HYP10 SOLIS HD 1/0AWG INDENTER

TE Part # 48131
HYP8 SOLIS 1/0-4/0AWG INDENTER

TE Part # 600850
ROTO-CRIMP TOOL (ASI)

TE Part # 48134
HYP8 SOLIS 3/0AWG NEST


Customers Also Bought

TE Part #2-34163-1
TERMINAL,PG R 16-14 5/16


TE Part #34320
SPLICE,SOLIS PARA 4

TE Part #35187
SPLICE,SOLIS PARA 2

TE Part #36946
SPLICE,SOLIS PARA 1/0

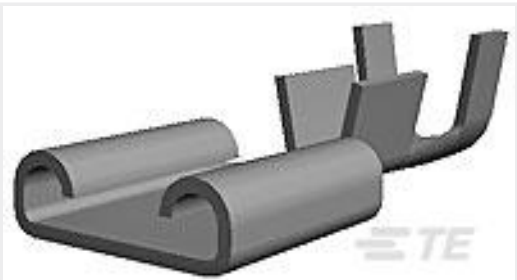


TE Part #1-160301-6
250 FASTON,REC.,10-12 AWG,TPBR

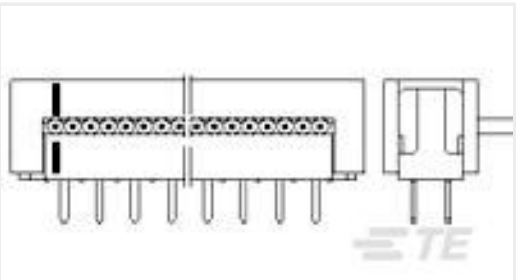

TE Part #2-216792-6
AMP LATCH ASSY 26 PO




TE Part #926980-2
CI 2 STIFT

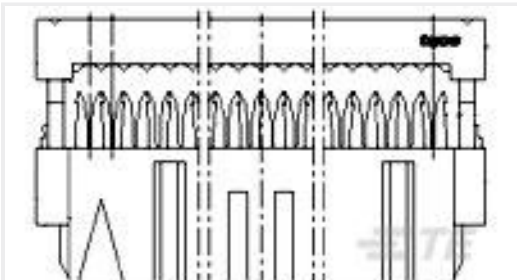

TE Part #1-215919-0
AMP-LATCH 15.2 HIGH TAPE



TE Part #827039-2
CIC.SOCKET ASSY.



TE Part #2119955-2
COMMERCIAL LUBRICATOR END FEED

Documents

Product Drawings

SPLICE,SOLIS PARA 3/0

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_36909_E1.3d_igs.zip

English

Customer View Model

ENG_CVM_36909_E1.3d_stp.zip

English

Customer View Model

ENG_CVM_36909_E1.2d_dxf.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals

UL Report

English

36909

Parallel Splice, 3/0 AWG, 80 – 95 mm² Wire, 150500 – 190000 CMA, Uninsulated, Standard, Copper, 19.02 mm [.749 in] Length, Loose Piece, Closed Barrel



UL Report

English