




Connectors > PCB Connectors > Backplane Connectors > Eurocard Connectors

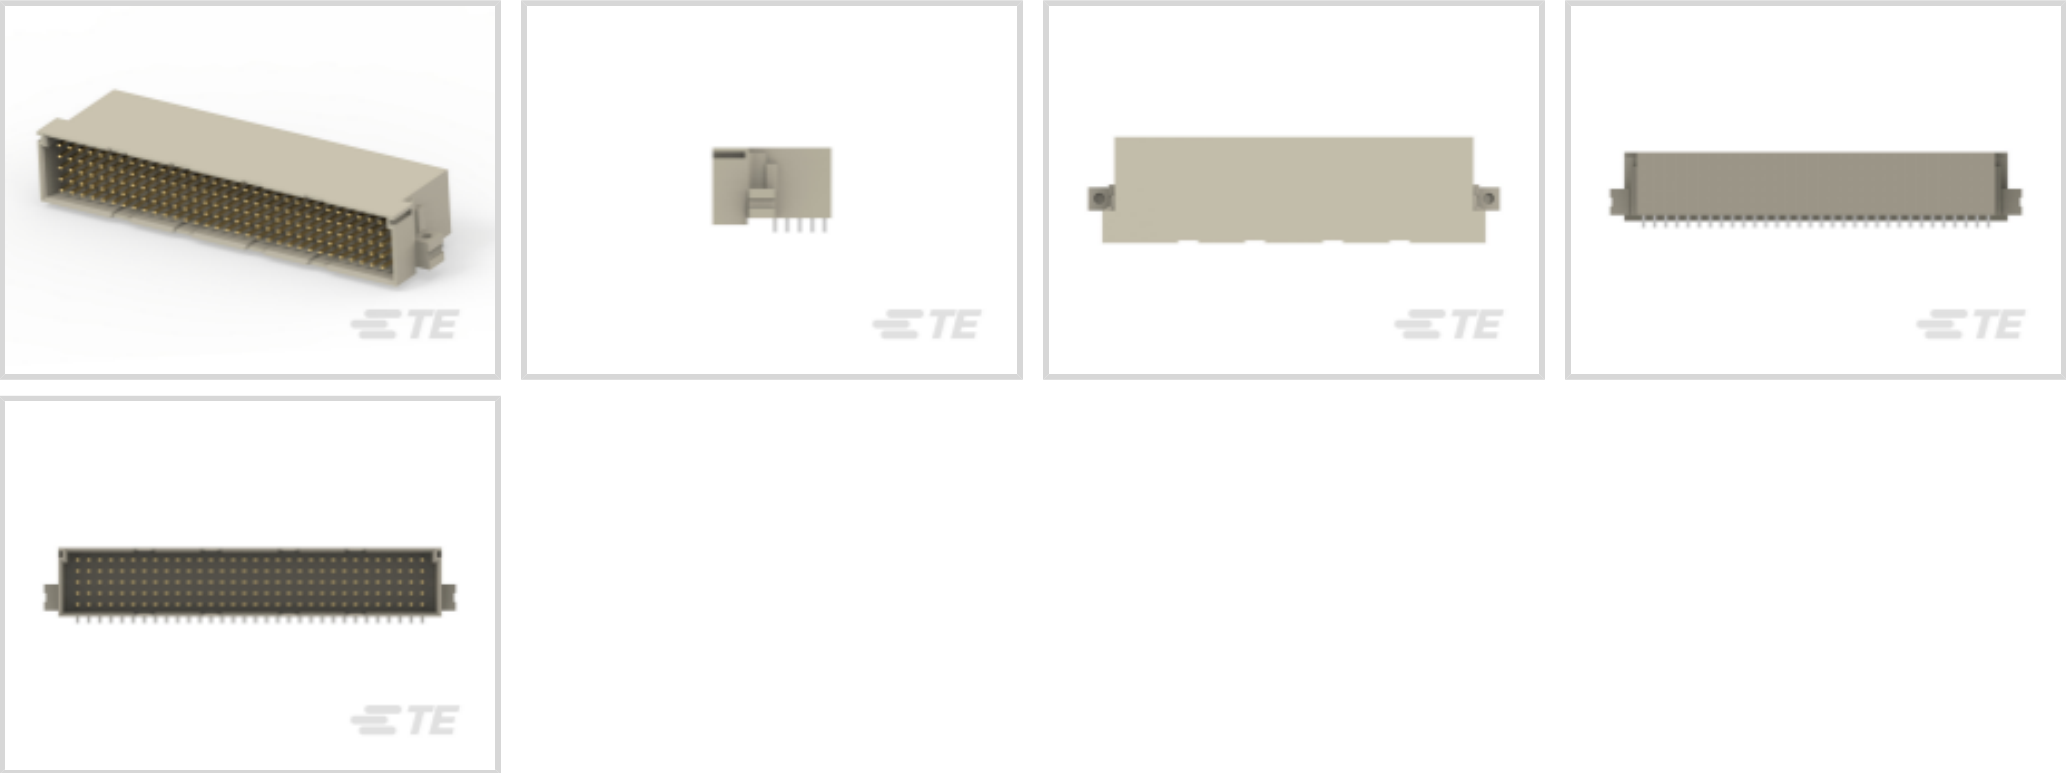

Connector & Housing Type: **Plug**

Connector System: **Board-to-Board**

Termination Post & Tail Length: **3 mm [.118 in]**

Number of Positions: **160**

Centerline (Pitch): **2.54 mm [.1 in]**

Features

Product Type Features

|                                   |                       |
|-----------------------------------|-----------------------|
| Connector & Housing Type          | Plug                  |
| Connector System                  | Board-to-Board        |
| Connector & Contact Terminates To | Printed Circuit Board |
| Performance Level                 | I                     |

Configuration Features

|                                 |               |
|---------------------------------|---------------|
| Mating & Unmating Configuration | Normal        |
| Number of Positions             | 160           |
| Number of Rows                  | 5             |
| PCB Mount Orientation           | Right Angle   |
| Number of Columns               | 32            |
| Rows Loaded                     | A, B, C, D, E |
| Number of Signal Positions      | 160           |

Contact Features

|                       |              |
|-----------------------|--------------|
| Contact Base Material | Copper Alloy |
|-----------------------|--------------|



|                                                                 |                                                                                                                               |
|-----------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| Contact Type                                                    | Pin                                                                                                                           |
| Termination Features                                            |                                                                                                                               |
| Termination Method to PCB                                       | Through Hole - Solder                                                                                                         |
| Termination Post & Tail Length                                  | 3 mm[.118 in]                                                                                                                 |
| Mechanical Attachment                                           |                                                                                                                               |
| Connector Mounting Type                                         | Board Mount                                                                                                                   |
| Housing Features                                                |                                                                                                                               |
| Housing Material                                                | PBT GF30                                                                                                                      |
| Centerline (Pitch)                                              | 2.54 mm[.1 in]                                                                                                                |
| Dimensions                                                      |                                                                                                                               |
| Connector Width                                                 | 12.7 mm[.5 in]                                                                                                                |
| Connector Height                                                | 16.2 mm[.638 in]                                                                                                              |
| Connector Length                                                | 94 mm[3.7 in]                                                                                                                 |
| Row-to-Row Spacing                                              | 2.54 mm[.1 in]                                                                                                                |
| Usage Conditions                                                |                                                                                                                               |
| Operating Temperature Range                                     | -55 – 125 °C[-67 – 257 °F]                                                                                                    |
| Operation/Application                                           |                                                                                                                               |
| Circuit Application                                             | Signal                                                                                                                        |
| Industry Standards                                              |                                                                                                                               |
| Compatible With Approved Standards Products                     | UL E84703                                                                                                                     |
| Product Compliance                                              |                                                                                                                               |
| For compliance documentation, visit the product page on TE.com> |                                                                                                                               |
| EU RoHS Directive 2011/65/EU                                    | Compliant                                                                                                                     |
| EU ELV Directive 2000/53/EC                                     | Compliant                                                                                                                     |
| China RoHS 2 Directive MIIT Order No 32, 2016                   | 有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold                                                                       |
| EU REACH Regulation (EC) No. 1907/2006                          | Current ECHA Candidate List: FEB 2026 (253)<br>Candidate List Declared Against: JAN 2025 (247)<br>Does not contain REACH SVHC |
| Halogen Content                                                 | Not Low Halogen - contains Br or Cl > 900 ppm.                                                                                |







Solder Process Capability

Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts
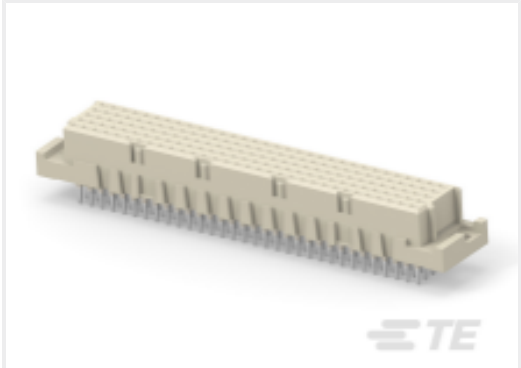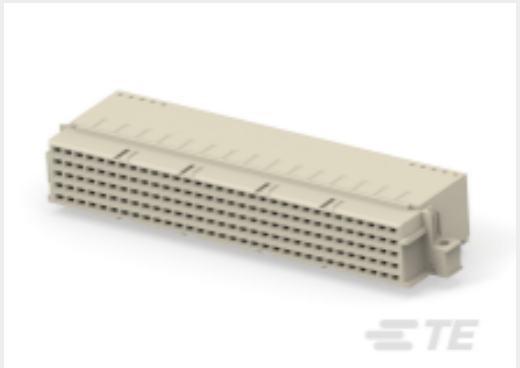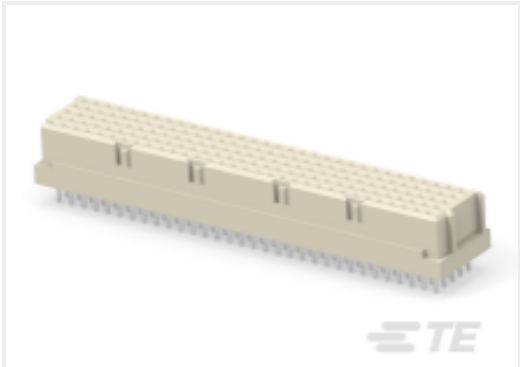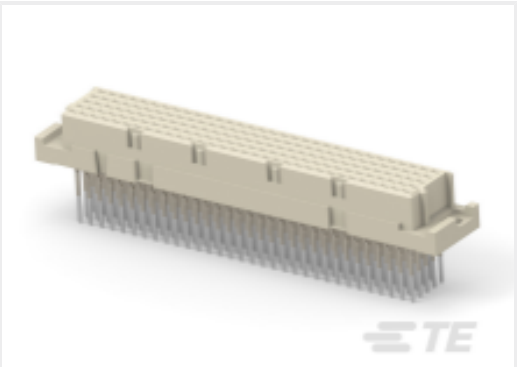
|                                                                                                                                                               |                                                                                                                                                                |                                                                                                                                                                 |                                                                                                                                                                 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>TE Part # 284314-E<br/>STVE 160 F ABCDE VVVV 7-00 TL 4,0<br/>* 247</p> |  <p>TE Part # 254006-E<br/>STVE 160 F ABCDE VVVV 7-00 EE 5,5<br/>* 247</p> |  <p>TE Part # 374385-E<br/>STVTE 160 FI ABCDE VVVV 7-03 TL-S<br/>* * 1</p> |  <p>TE Part # 284313-E<br/>STVE 160 F ABCDE VVVV 7-00 TL 4,0<br/>* 247</p> |
|  <p>TE Part # 374380-E<br/>STVTE 160 FI ABCDE VVVV 7-03 TL-S<br/>* * 2</p> |  <p>TE Part # 284959-E<br/>STVE 160 F ABCDE VVVV 7-00 TL 4,0<br/>* 137</p> |  <p>TE Part # 254123-E<br/>STVE 160 F ABCDE VVVV 7-00 EE 4,0<br/>* 247</p> |  <p>TE Part # 254839-E<br/>STVE 160 F ABCDE VVVV 7-00 EE 5,5<br/>* 137</p> |
|  <p>TE Part # 254124-E<br/>STVE 160 F ABCDE VVVV 7-00 EE 4,0<br/>* 247</p> |  <p>TE Part # 254960-E<br/>STVE 160 F ABCDE VVVV 7-00 EEUE<br/>17,0 *</p>  |  <p>TE Part # 374390-E<br/>STVTE 160 FI ABCDE VVVV 7-03 EE *<br/>* 247</p> |  <p>TE Part # 254975-E<br/>STVE 160 F ABCDE VVVV 7-00 EEUE<br/>13,0 *</p>  |

Customers Also Bought

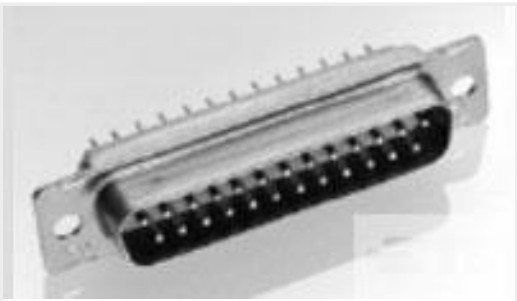

TE Part #443975-1  
AMPLIMITE,RCPT ASY,POSTD,109,1



TE Part #536019-5  
096 EURO TYP R PIN AP MFBL ASY



TE Part #1-640445-3  
13P MTA156 HDR ASSY FL/STR SN



TE Part #650913-5  
096 EURO TYPE C PIN BL ASSY




TE Part #1-1558737-2  
SR6-423-L048




TE Part #1-1617069-0  
DS9-1W=DS9 DIP SOLID STATE RELAY




TE Part #1-1617122-2  
JMACD-26XM = M39016/15-081M

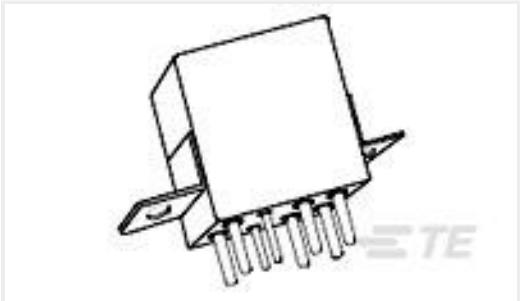

TE Part #1-1617749-8  
FCA-210-1022M=M83536/10-022M

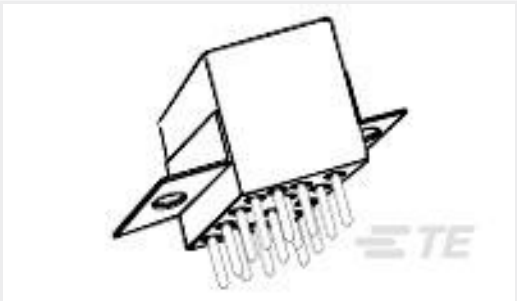

TE Part #1-1617754-7  
FCA-410-1620M=M83536/16-020M

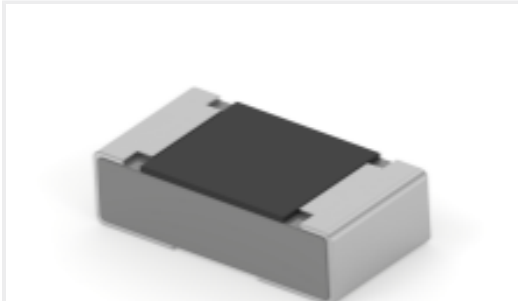

TE Part #4-2176474-3  
RA73F 1J 1K5 0.1% 1K RL

Documents

Product Drawings

STVE 160 M ABCDE VVVV 4-00 0606 \* \* 137

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_384298-E\_B.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_384298-E\_B.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_384298-E\_B.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications



Product Specification

English