



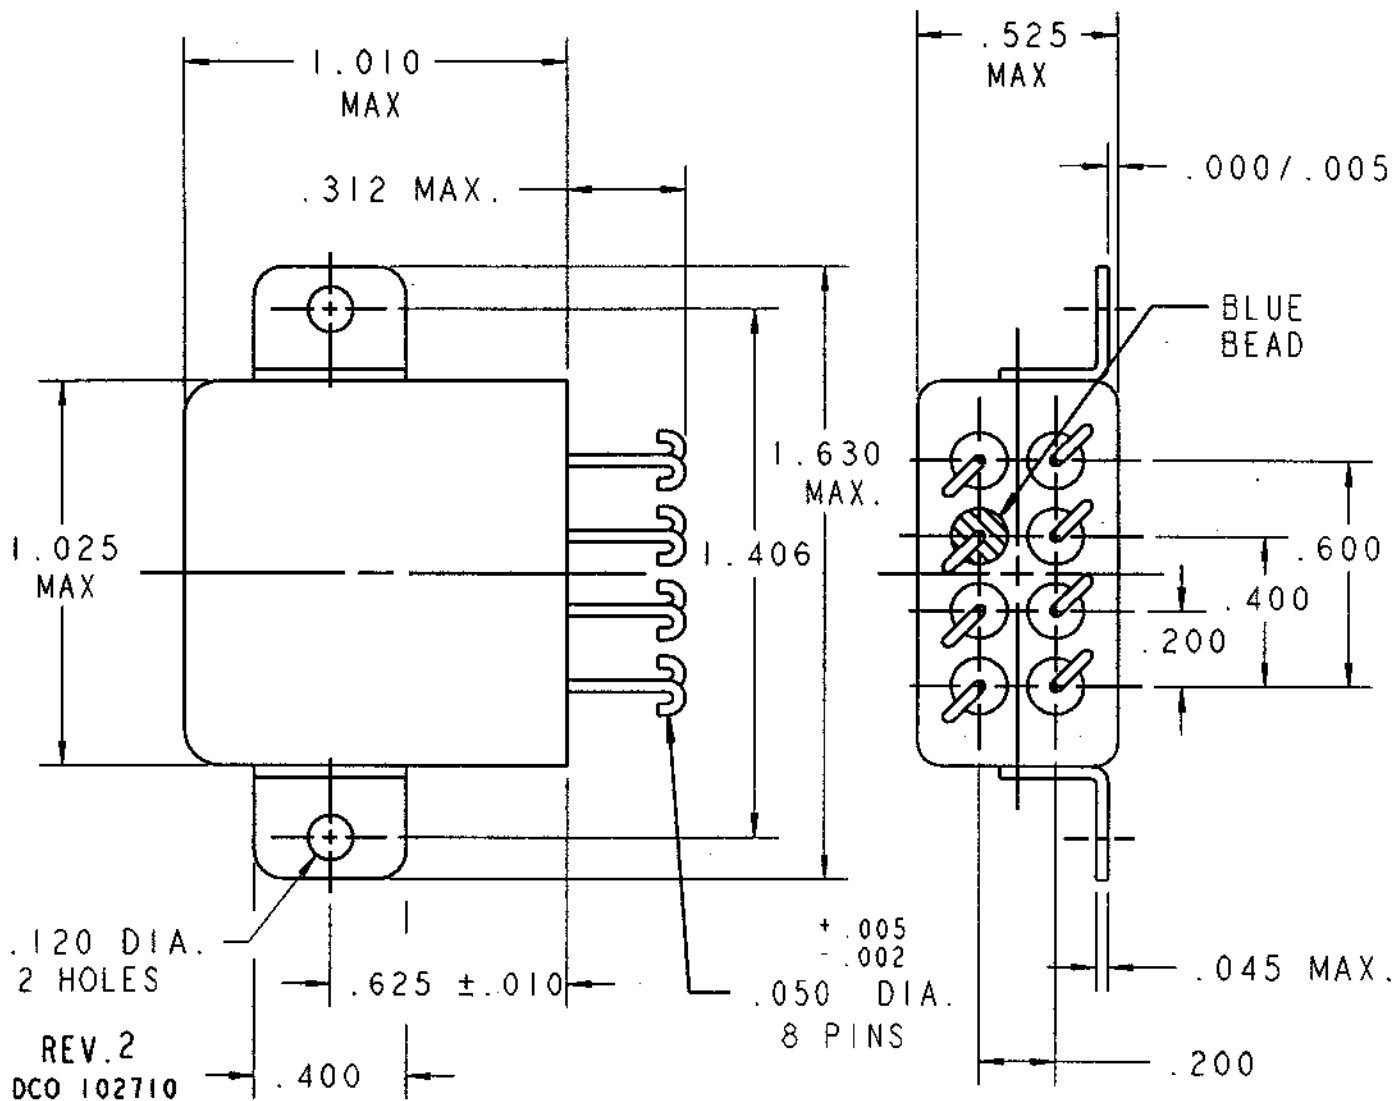

COIL: @ 25°C  
 RESISTANCE 7600 OHMS ± 10%  
 NOMINAL VOLTAGE 120.0 VDC  
 MUST OPERATE 65.0 VDC  
 MUST RELEASE 7.7 VDC

ENVIRONMENT:  
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's  
 SHOCK 50 g's 11 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C  
 NOTES: OPERATE & RELEASE 15 MS MAX.  
 OPERATE BOUNCE 5 MS MAX.  
 RELEASE BOUNCE 5 MS MAX.

# CUSTOMER DATA SHEET

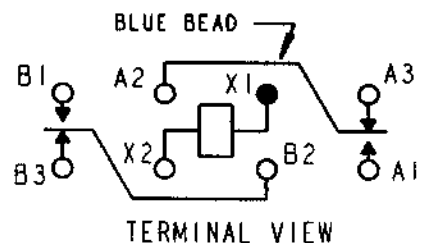

CONTACT RATING: 10 AMPS 28 VDC  
 5 AMPS 115 VAC/400 Hz RESISTIVE  
 50,000 OPERATIONS

DR. R.B. 5/19/92 CK. TLG 8-17-01

**CII Technologies**  
 advanced control electronic solutions

CUST. OPL  
 CUST. NO. M5757/23-036 REV.

"07" RELAY

B07D932BE2-0352