

DIM PICO | Stand-alone daylight sensors with 1...10 V dimming interface



Areas of application

- Individual luminaires

Product benefits


- Energy savings up to 30 % (compared to CCG + T8 lamp, without sensors)
- Compensates for 50 % of the incoming daylight
- Direct connection to the 1...10 V interface
- Simple setting of the set point via aperture

Product features

- 1...10 V light sensor
- Simple clip-on installation for T8 and T5 lamps
- Cable length: 700 mm

Technical data

Dimensions & weight

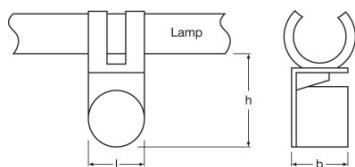

Length	21.0 mm
Width	21.0 mm
Height	31.0 mm
Product weight	22.00 g

Colors & materials

Product color	White
---------------	-------

Temperatures

Ambient temperature range	+5...+55 °C
---------------------------	-------------

Capabilities

Dimming interface	1...10 V
Maximum installation height	4 m
Detection angle	50 ° 1)
Number of control outputs	1
Type of installation	Luminaire integration/Clip on lamp

1) Approximately

Certificates & standards

Type of protection	IP20
--------------------	------

Equipment / Accessories

- Suitable for up to 10 electronic control gears

Download Data

Product datasheet

File	
	Brochures Energy saving
	Declarations of conformity Declaration of conformity DIM MICO DIM PICO
	Installation guide Technical instructions

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300554457		Shipping carton box 20	272 mm x 155 mm x 163 mm	6.87 dm ³	926.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.