


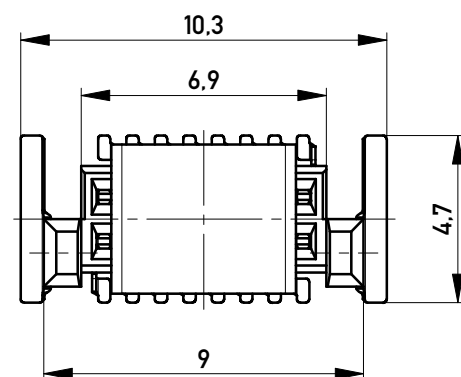
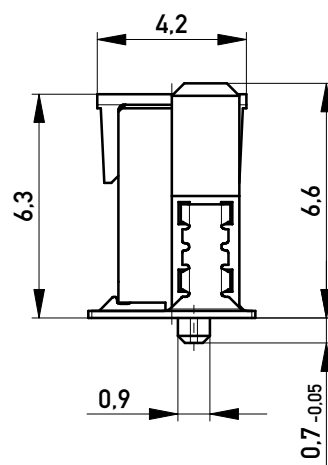


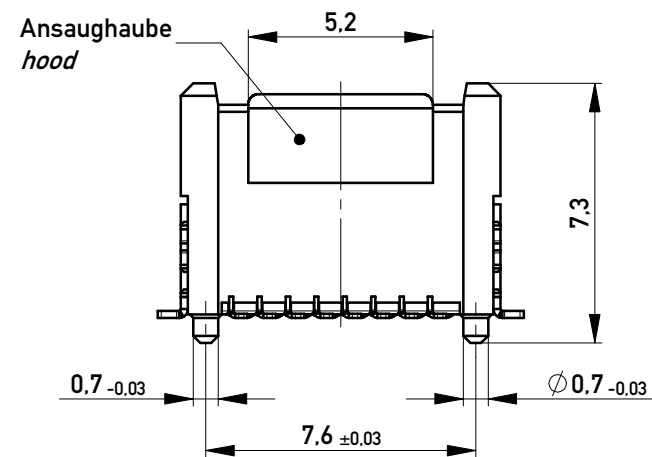


ohne Ansaughaube - without hood

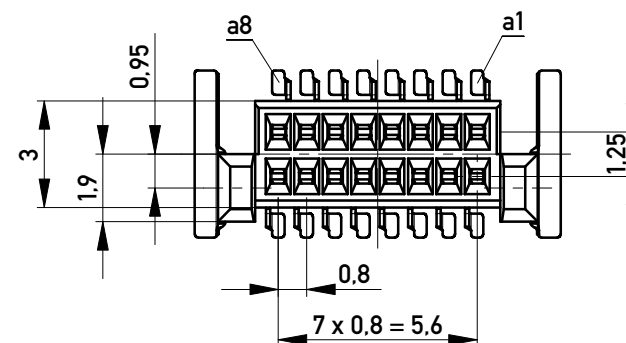

ohne Ansaughaube - without hood

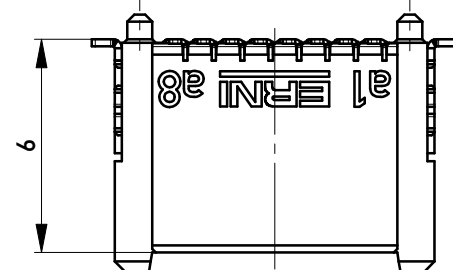

Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT

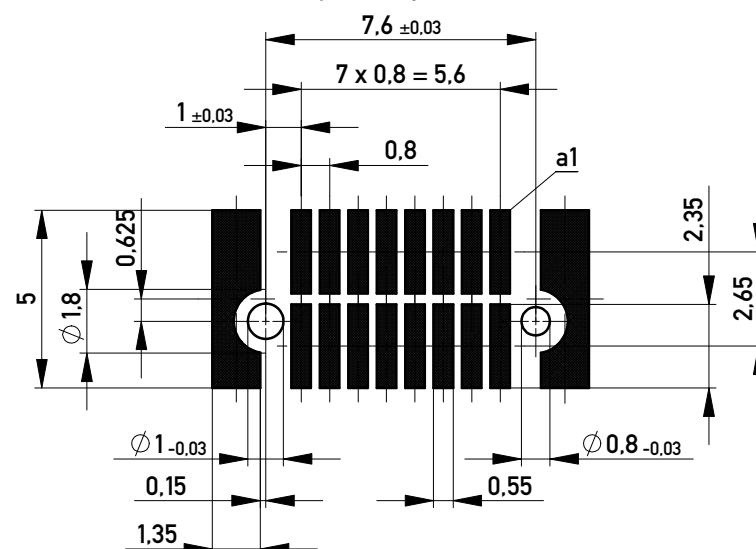


Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating


Anschlussbereich verzinkt 4-6 µm
Terminal Area 4-6 µm tin plating


Koplanarität der Anschlüsse ≤ 0,1 mm
Coplanarity Area of Termination ≤ 0,1 mm

Verpackt im Gurt in Anlehnung an DIN IEC 60286-3
Tape on Reel Packaging according to DIN IEC 60286-3
Verpackungseinheit: 740 Stück
Packaging unit: 740 pcs

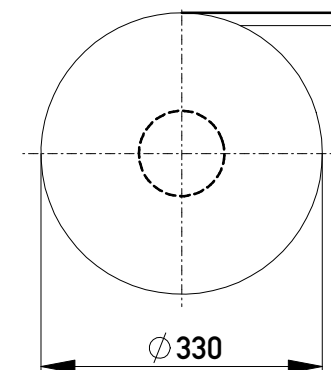

Abspulrichtung - Reel off Direction

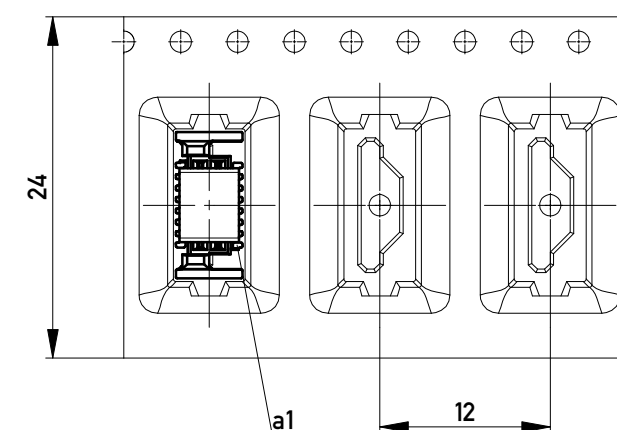

Information:			Tolerances	 All Dimensions in mm	Scale	5:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.			Subject to modification without prior notice. Drawing will not be updated.		Designation	
					0,8 DRC-B, F 6mm, 16 polig 0,8 DRC-B, F 6mm, 16 pin	
e	28.06.2016		 www.ERNI.com		454925	
Index	Date				I A3	
					Class	DRCB

Copyright by ERNI Production GmbH & Co. KG
Proprietary notice pursuant to ISO 16016 to be observed.