5-146281-2 ✔ ACTIVE


AMPMODU | AMPMODU Headers



TE Internal #: 5-146281-2

PCB Mount Header, Vertical, Board-to-Board, 2 Position, 2.54 mm [.1 in] Centerline, Breakaway, Gold (Au), Through Hole - Solder, AMPMODU Headers

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles

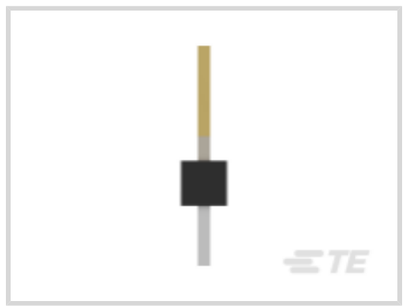PCB Connector Type: **PCB Mount Header**

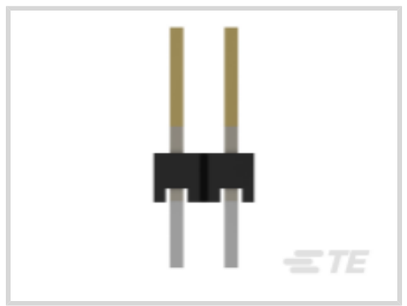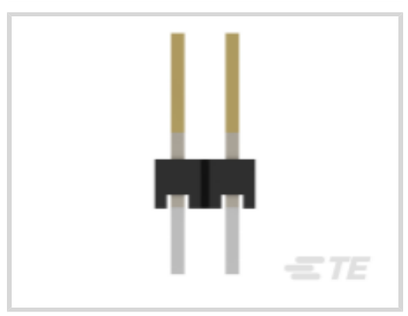Connector System: **Board-to-Board**

Number of Positions: **2**

Number of Rows: **1**

Centerline (Pitch): **2.54 mm [.1 in]**

Features

Product Type Features

PCB Connector Type	PCB Mount Header
Connector System	Board-to-Board
Header Type	Breakaway
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

Connector Contact Load Condition	Fully Loaded
Number of Positions	2
Number of Rows	1
PCB Mount Orientation	Vertical
Board-to-Board Configuration	Parallel

Body Features

Primary Product Color	Black

Contact Features

	100 – 200 µin
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material Finish	Matte
Mating Square Post Dimension	.64 mm[.025 in]
Contact Shape & Form	Square
Contact Base Material	Copper Alloy
PCB Contact Termination Area Plating Material	Tin-Lead
Contact Mating Area Plating Material Thickness	.762 µm[30 µin]
Contact Mating Area Plating Material	Gold (Au)
Contact Type	Pin
Contact Current Rating (Max)	3 A

Termination Features

Termination Post & Tail Length	3.05 mm[.12 in]
Square Termination Post & Tail Dimension	.64 mm[.025 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Connector Mounting Type	Board Mount
Mating Alignment	Without
PCB Mount Alignment	Without
PCB Mount Retention	Without

Housing Features

Centerline (Pitch)	2.54 mm[.1 in]
Housing Material	LCP, LCP GF

Dimensions

PCB Thickness (Recommended)	1.6 mm[.063 in]

Usage Conditions

Housing Temperature Rating	High
Operating Temperature Range	-65 – 105 °C[-85 – 221 °F]

Operation/Application

Circuit Application	Signal

Industry Standards

Compatible With Approved Standards Products	CSA LR7189, UL E28476
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	500
Packaging Method	Carton

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free
Solder Process Capability	Pin-in-Paste capable to 260°C


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts




TE Part # 966657-4
4P HV100 REC. CON, SMD, GOLD, TUBE PACK




TE Part # 2-881545-2
AMP SHUNT LOW PROFI

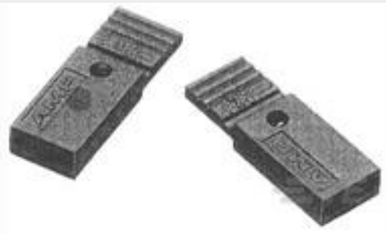


TE Part # 881545-3
SHUNT LP W/HANDLE 2 POS 50AU

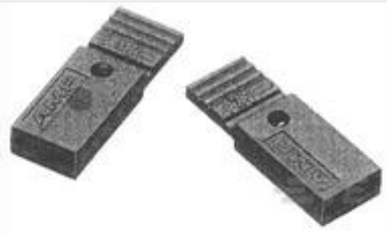

TE Part # 880584-2
SHUNT CONNECTOR

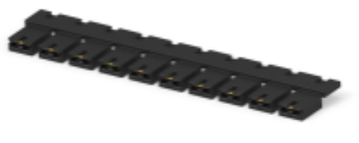


TE Part # 2-382811-0
ECONOMY SHUNT, 30 AU BLACK



TE Part # 390088-3
BLUE HSG WITH 30AU CONTACT




TE Part # 881545-2
SHUNT LP W/HANDLE 2 POS 30AU

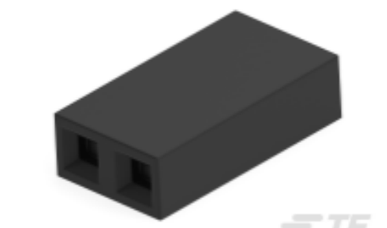


TE Part # 530153-2
TDM SPRING SHUNT ASSY 2 POS




TE Part # 880584-7
AMP SHUNT CONNECTOR ASS'Y

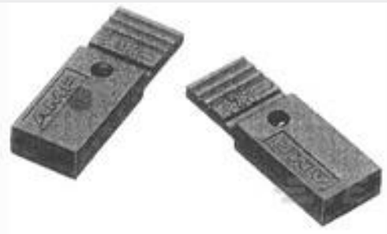

TE Part # 1-881545-2
AMP SHUNT ASS'Y

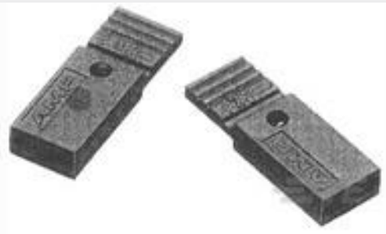

TE Part # 1-880584-2
SHUNT CONN. ASS'Y

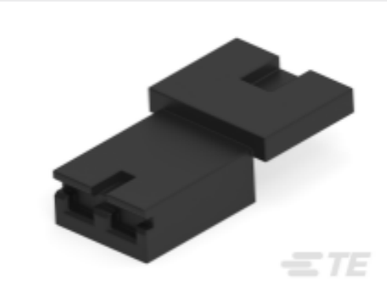

TE Part # 390088-1
BLACK HSG WITH 30AU CONTACT



TE Part # 390088-5
YELLOW HSG WITH 30AU CONTACT



TE Part # 881545-5
AMP SHUNT ASS'Y


Also in the Series | AMPMODU Headers



Automotive Headers(3)




Automotive Signal & Power Headers(3)

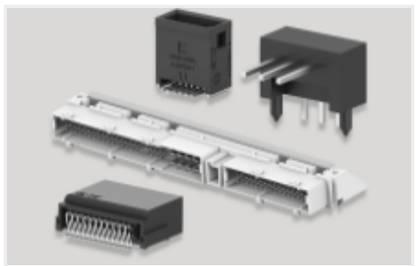

PCB Headers & Receptacles(1173)




Rectangular Power Connectors(25)

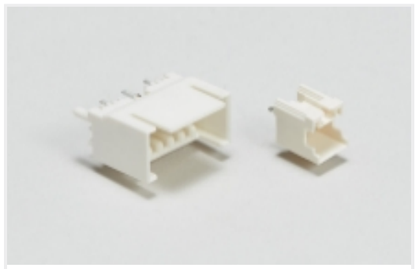

Wire-to-Board Headers & Receptacles (78)

Customers Also Bought

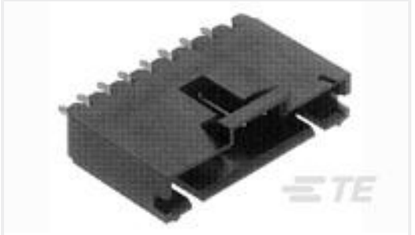


TE Part #103735-6
07 MTE HDR SRST LATCH .100CL




TE Part #5-146281-4
04 MODII HDR SRST B/A LF




TE Part #1-641215-0
10P MTA100 HDR ASSY FL/ST 30AU

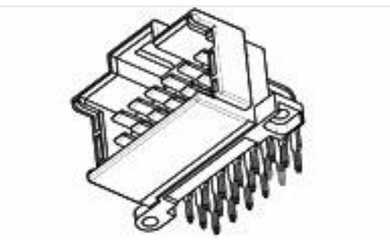

TE Part #966140-2
MESSERLEISTE 15P

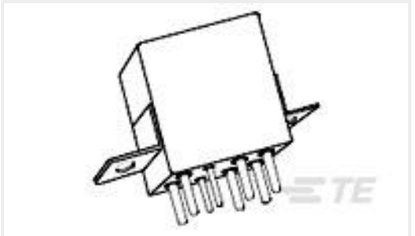


TE Part #9-1617748-2
FCA-210-0919M=M83536/9-019M

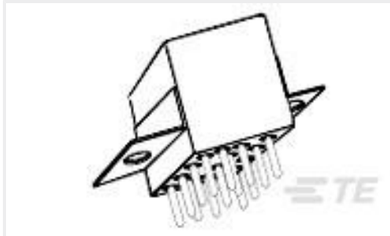

TE Part #1617754
FCA-410-1517M=M83536/15-017M




TE Part #2-1617799-5
FCAC-325-BZ4=RELAY

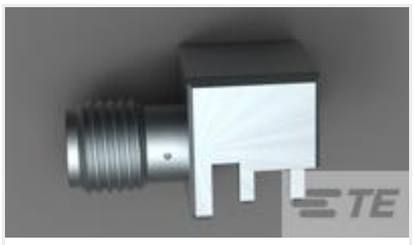

TE Part #2081005-1
ASSY. SMA JACK PCB EDGE MOUNT



TE Part #2303344-1
34POS,PIN DIA 1.0,HEADER ASSY,180 DEG

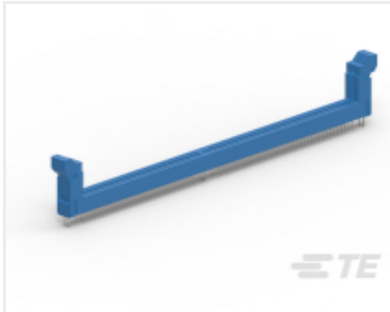

TE Part #2-2308107-0
DDR4 DIMM 288 PIN TH TYPE

Documents

Product Drawings

02 MODII HDR SRST B/A LF

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5-146281-2_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_5-146281-2_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5-146281-2_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Application Specification

English