




Connectors > Rectangular Connectors > Standard Rectangular Connectors

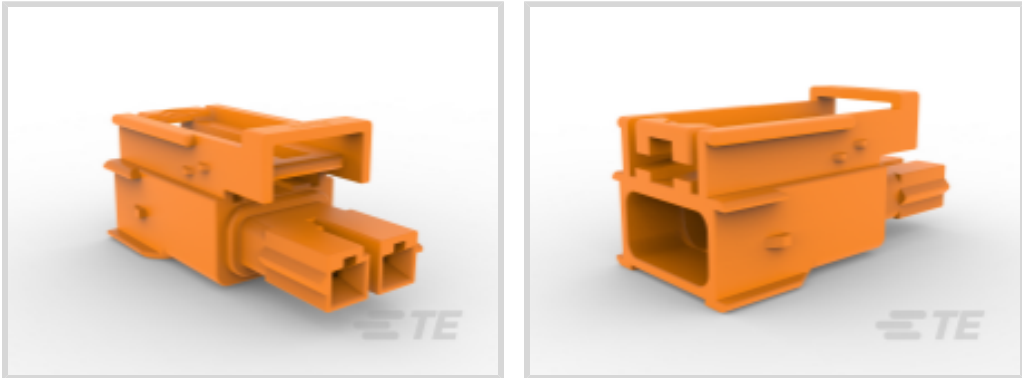

Connector Product Type: **Housing**

Connector & Housing Type: **Plug**

Termination Method to Wire & Cable: **Crimp**

Connector System: **Wire-to-Wire**

Contact Retention Within Housing: **Without**

Features

Product Type Features

Connector Seal & Plug Type	Interface Seal
Connector Product Type	Housing
Connector & Housing Type	Plug
Connector System	Wire-to-Wire
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Columns	2
Number of Positions	2
Number of Rows	1
Number of Power Positions	2

Electrical Characteristics

Operating Voltage	600 VDC
-------------------	---------

Body Features

Connector & Keying Code	E
Primary Product Color	Orange
Cable Exit Angle	180°



Contact Features

Contact Layout	Inline
Contact Retention Within Housing	Without
Contact Type	Receptacle

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Housing Features

Centerline (Pitch)	5 mm [.197 in]
Housing Material	PBT GF

Usage Conditions

Operating Temperature Range	-30 – 140 °C [-22 – 284 °F]
-----------------------------	-----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Identification Marking

Circuit Identification Feature	With
--------------------------------	------

Industry Standards

Compatible With Agency/Standards Products	UL
Compatible With Approved Standards Products	UL E28476
UL Flammability Rating	UL 94V-0
Glow Wire Rating	Standard Part - Not Glow Wire

Packaging Features

Packaging Method	Carton
------------------	--------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC



Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 2325349-2
Power Versa-Lock REAR SEAL, 1X2, LargeID



TE Part # 2329914-1
Power Versa-Lock SEAL RECPT, 18-20 AWG



TE Part # 2329912-1
Power Versa-Lock RECPT, 18-20, 2X22 AWG



TE Part # 5-2378158-2
Power Versa-Lock CAP, 1X2 KEY E



TE Part # 2325347-2
Power Versa-Lock INTERFACE SEAL, 1X2



TE Part # 3-2325349-2
PWR VERSA-LOCK REAR SEAL, 1X2, 1.5-2.4



TE Part # 2334614-2
Power Versa-Lock BACK COVER 2P



TE Part # 2329916-1
Power Versa-Lock SEAL RECPT, 14-16 AWG




TE Part # 2329915-1
Power Versa-Lock RECPT, 22-26 AWG

Also in the Series | Power Versa-Lock 5.0



Connector Caps & Covers(4)

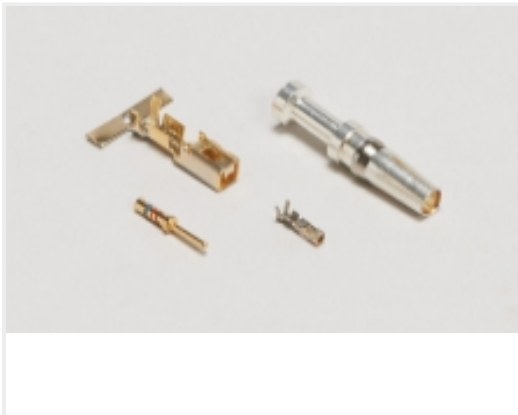

Connector Contacts(12)




Connector Hardware(5)



Connector Seals & Cavity Plugs(10)



Insertion & Extraction Tools(2)

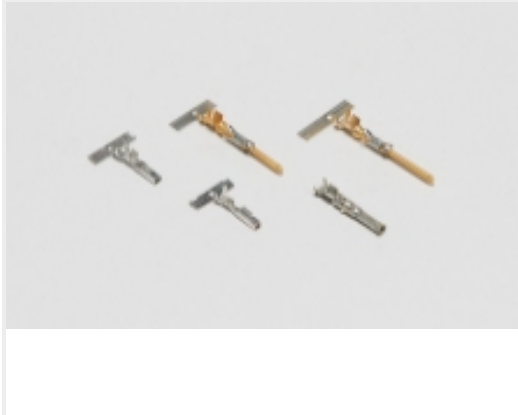

Power Contacts(12)




Rectangular Power Connectors(77)

Customers Also Bought




TE Part #42742-2
250 FASTON FLAG REC 18-12 AWG TPBR

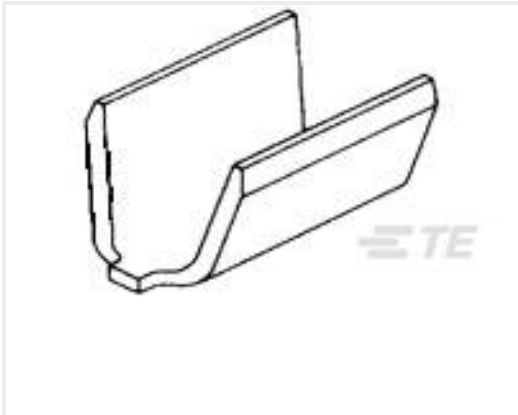


TE Part #61008-1
SPLICE 18-16 AWG .0158 TPST



TE Part #63896-1
250 FASTON REC 16-12 AWG BR

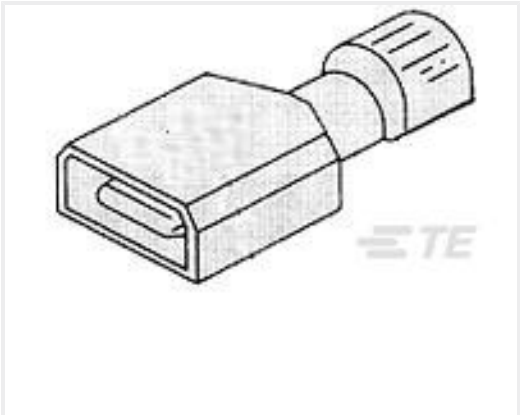

TE Part #2-520102-2
ULTRA-FAST 250 ASSEMBLY TAB 22-18 AWG BR

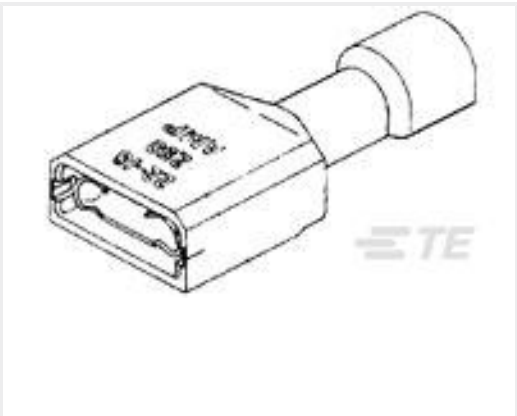


TE Part #2-520263-2
ULTRA-FAST 250 ASY REC 22-18 TPBR



TE Part #520963-2
ULTRA-POD 250 ASSY REC 18-14 AWG TPBR




TE Part #2325349-2
Power Versa-Lock REAR SEAL, 1X2, LargeID

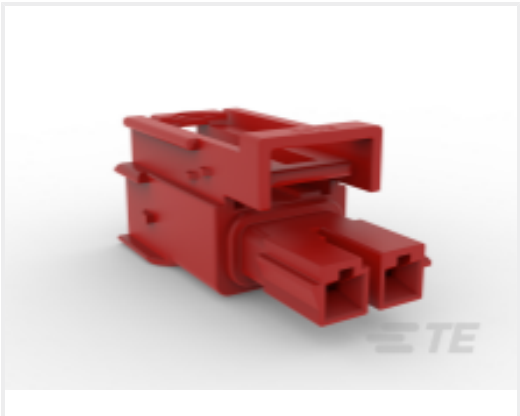

TE Part #4-2378159-2
Power Versa-Lock PLUG, 1X2 KEY D



TE Part #9-2378159-2
Power Versa-Lock PLUG, 1X2 KEY I

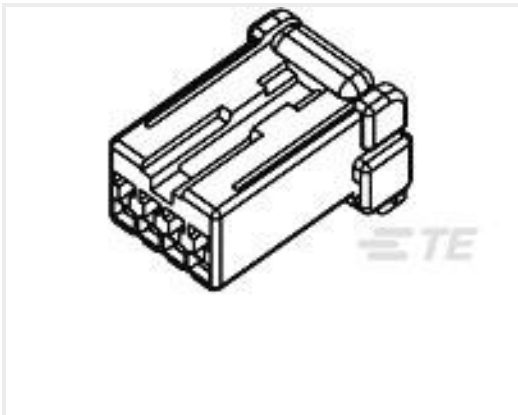

TE Part #174966-2
040 MLC PLUG HSG 4P BLACK

Documents



Product Drawings

Power Versa-Lock PLUG, 1X2 KEY E

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5-2378159-2_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_5-2378159-2_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5-2378159-2_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

power-versa-lock-connectors-0421

English

Product Specifications

Engineering Report

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals

UL Report

English