5-2387150-1 ✔ ACTIVE


AMP | LEAVYSEAL

TE Internal #: 5-2387150-1

12 V / 24 V, 39 Position, Automotive Housing for Male Terminals, Wire-to-Wire, 5 mm [.197 in] Centerline, Sealable, Green, Wire & Cable, LEAVYSEAL

View on TE.com >

Automotive Parts > Automotive Connectors > Automotive Housings > LEAVYSEAL Connector Housings

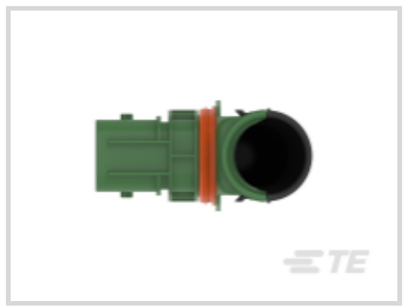


Nominal Voltage Architecture: **12 V, 24 V**

Connector & Housing Type: **Housing for Male Terminals**

Number of Positions: **39**

Sealable: **Yes**

Operating Temperature Range: **-40 – 120 °C [-40 – 248 °F]**

All LEAVYSEAL Connector Housings (117)

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector & Housing Type	Housing for Male Terminals
Sealable	Yes
Primary Locking Feature	Integrated in Housing
Connector System	Wire-to-Wire
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	39
Number of Rows	3

Electrical Characteristics

Operating Voltage	36 VDC

Nominal Voltage Architecture	12 V, 24 V

Body Features

Cable Exit Angle	90 °
Primary Product Color	Green
Connector & Keying Code	E

Contact Features

Contact Size	2.8mm
Contact Type	Tab
Mating Tab Width	2.8 mm[.11 in]

Mechanical Attachment

Strain Relief	With
Terminal Position Assurance	Yes
Mating Alignment Type	Polarization
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PBT GF20
Centerline (Pitch)	5 mm[.197 in]

Dimensions

Row-to-Row Spacing	5.5 mm[.217 in]
Product Width	70.7 mm[2.783 in]
Product Length	113.25 mm[4.459 in]
Connector Height	45.8 mm[1.803 in]

Usage Conditions

Operating Temperature Range	-40 – 120 °C[-40 – 248 °F]
Operating Temperature (Max)	120 °C[248 °F]

Operation/Application

Circuit Application	Power

Industry Standards

IP Rating	IP67, IP69K
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	80
Packaging Method	Box

Other

Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: FEB 2026 (253) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked.Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles'(Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts



TE Part # CAT-L489-CH8172
LEAVYSEAL Connector Housings


Also in the Series | LEAVYSEAL

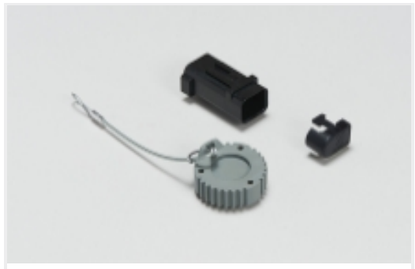

Automotive Connector Caps & Covers (27)



Automotive Housings(119)

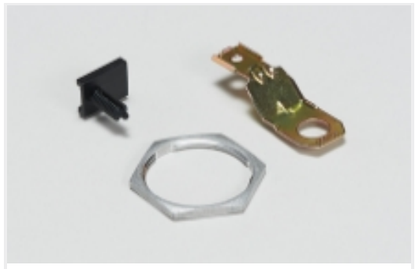

Other Automotive Connector Accessories(17)

Customers Also Bought



TE Part #CAT-P87074-C1701
Standard Temperature Caps | POWER TRIPLE LOCK



TE Part #7-1971772-3
PTL 1X3 CAP PANEL MT HITEMP KEY C BLK



TE Part #7-1971773-3
PTL 1X3 PLUG HSG HIGH TEMP KEY C BLK



TE Part #1971780-2
PTL TAB CONTACT, 12 AWG




TE Part #1-2112041-2
26POS, MIXED,TAB HSG,ASSY, SEALED



TE Part #2112046-2
COVER,90,FOR 26POS



TE Part #1-2236343-5
3POS, MCON 1.2 LL REC SEALED

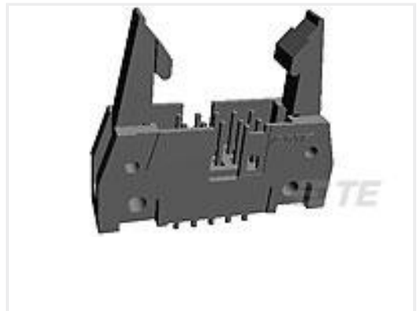

TE Part #5499206-2
A/L UNIV HDR 14P VERT LAT

Documents

Product Drawings

2.8MM TAB HSG.,39POS.,ASSY

English

CAD Files

Customer View Model

ENG_CVM_CVM_5-2387150-1_1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_5-2387150-1_1.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_5-2387150-1_1.3d_igs.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications

Application Specification

English