


LOC	DIST	REVISIONS									GG	EL
		P	LTR	DESCRIPTION						DATE		
HM	00		N	SUPSD -1, ECO-06-026687						20FEB07	LH	CD

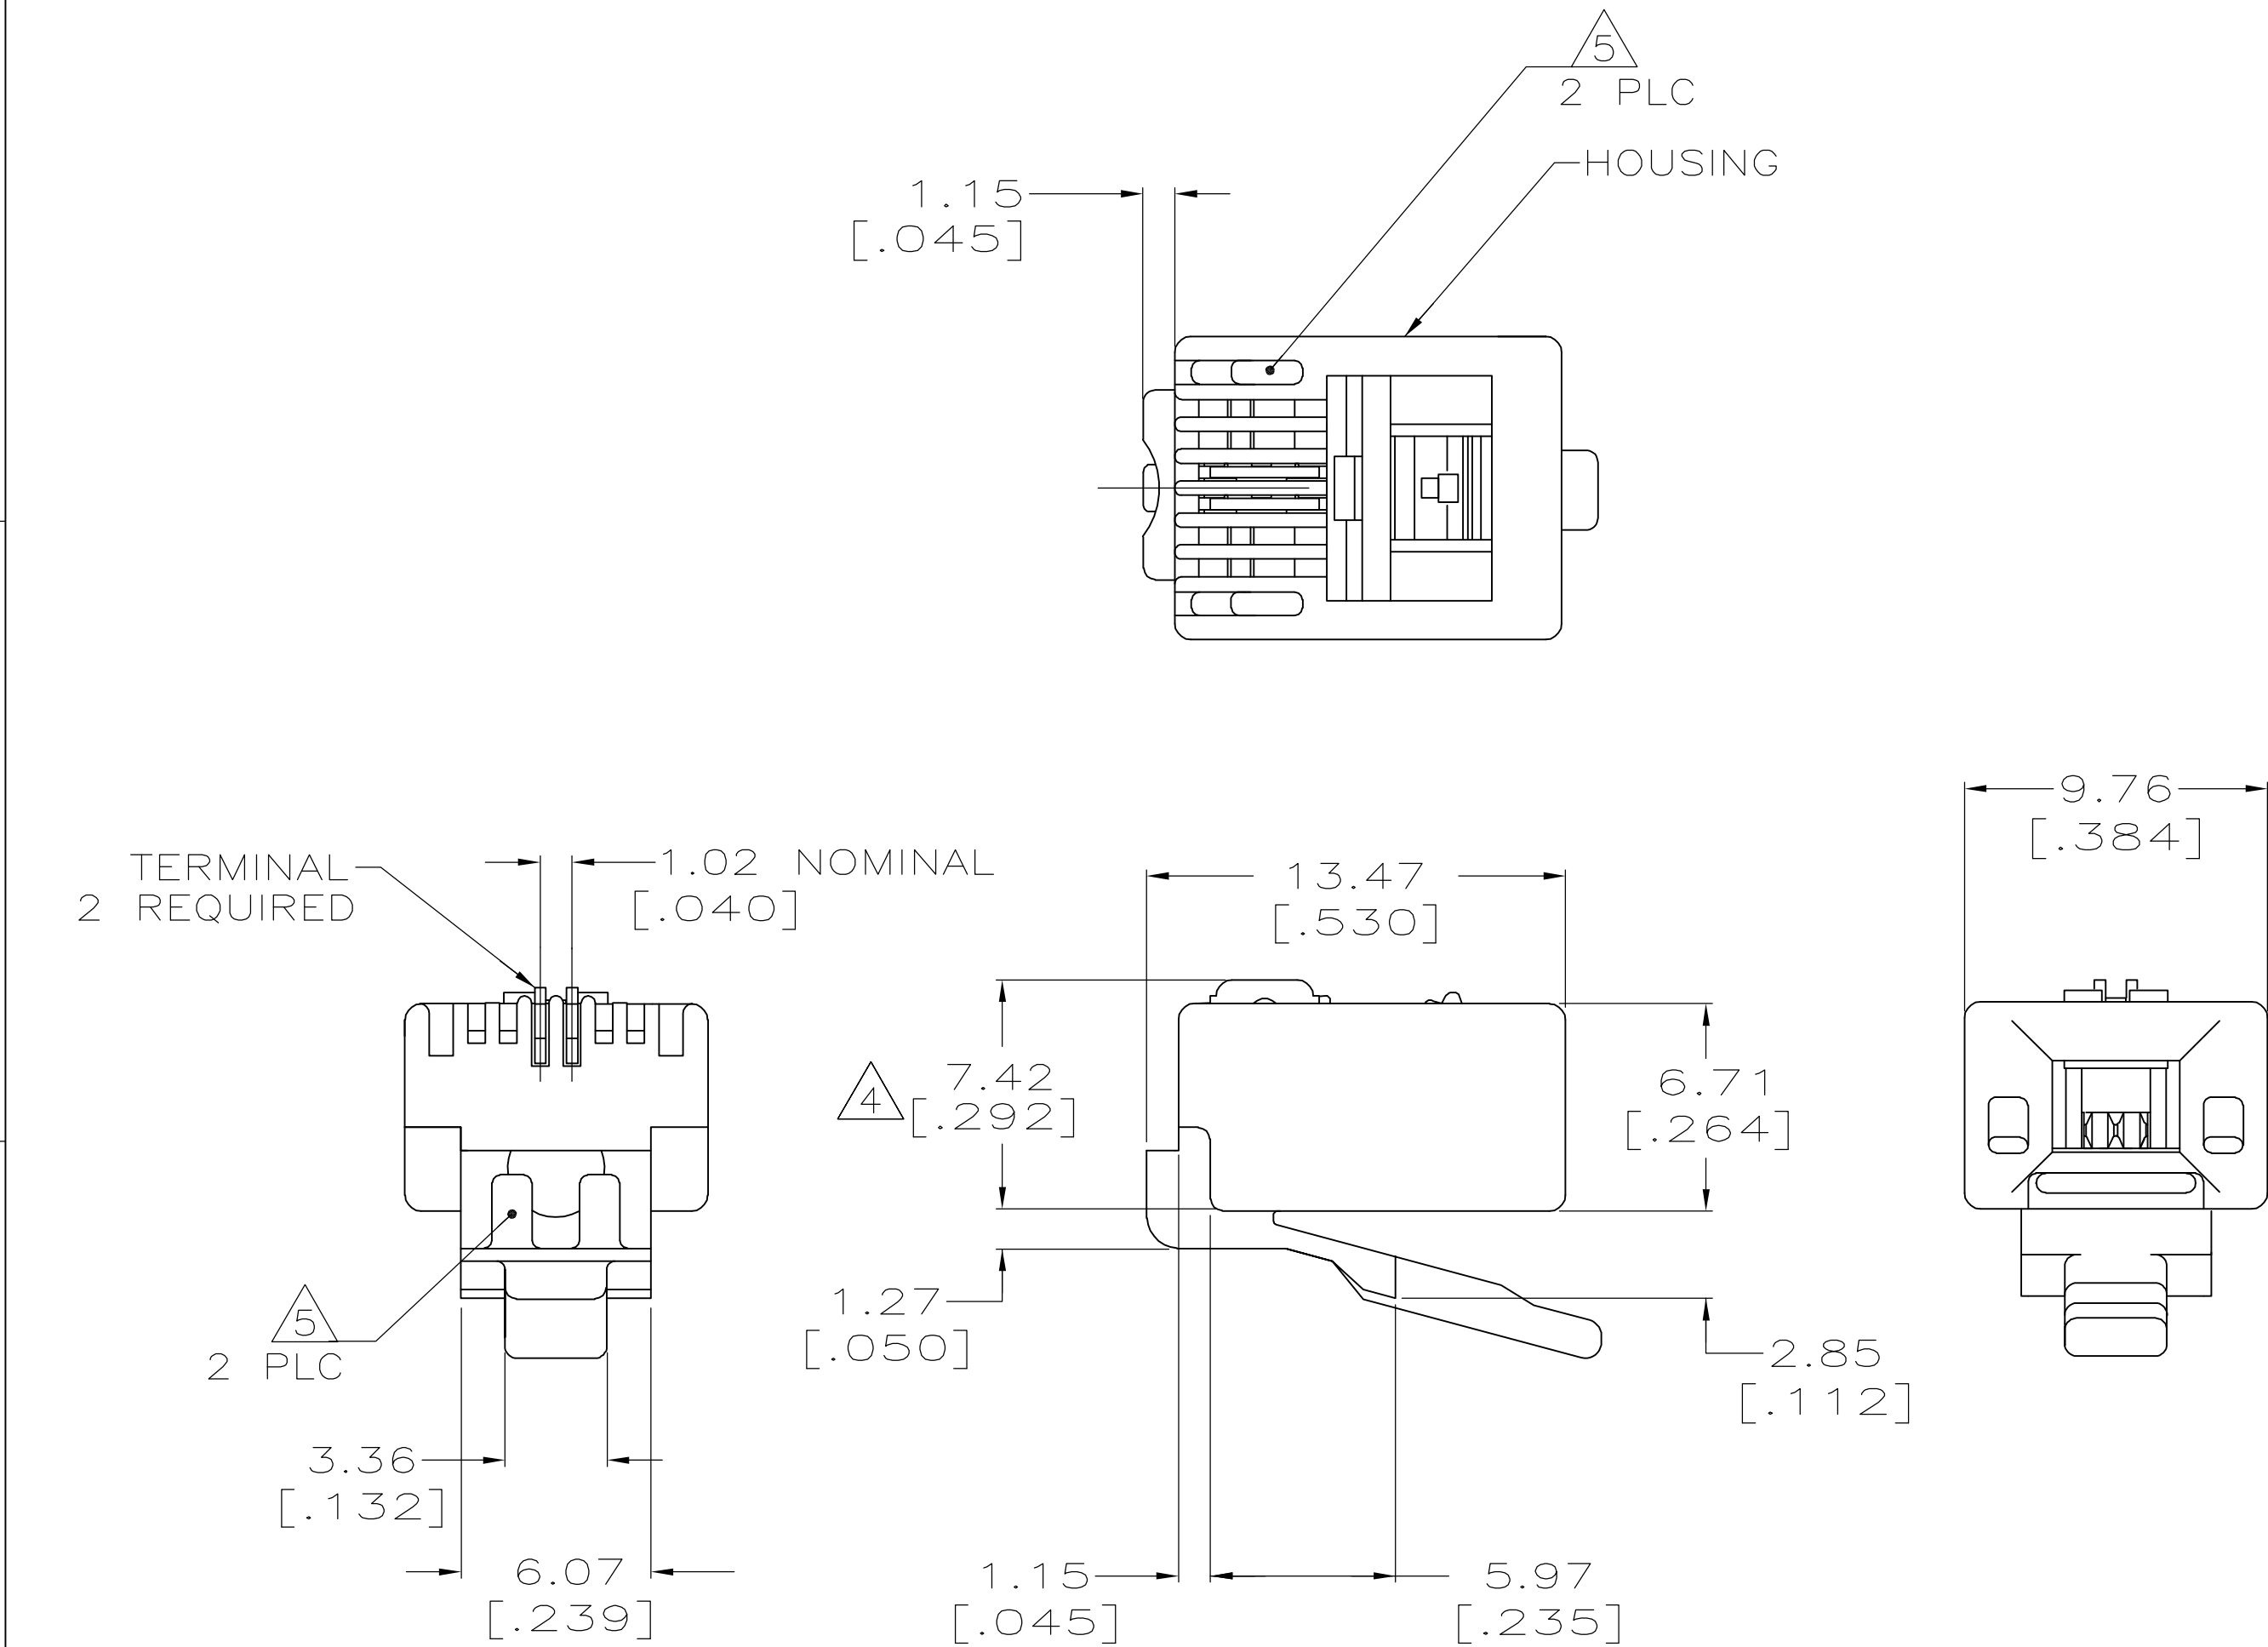

1. ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY UNLESS OTHERWISE SPECIFIED.

2. MATERIAL: HOUSING—POLYCARBONATE CLEAR.
TERMINAL— 0.36[.014] THICK PHOS BRONZE PLATED WITH 1.27μm[.000050] MINIMUM THICK GOLD IN LOCALIZED GOLD PLATE AREA, GOLD FLASH ON THE REMAINDER, OVER 2.54μm [.000100] MINIMUM THICK NICKEL UNDERPLATE..

3. PLUG WILL EXCEPT 26 OR 28 AWG STRANDED OR TINSEL WIRE HAVING A MAXIMUM INSULATION OF $\phi 0.99[.039]$ AND A MAXIMUM OVAL CABLE JACKET OF 2.29x4.06 [.090x.160].

4. TERMINATED DIMENSION TO MEET FCC REQUIREMENTS .237±.005.

5. REELED PRODUCT ON STRIP DOES NOT HAVE VOID CORING ILLUSTRATED ON THIS DRAWING.

SUPSD BY 5-641333-2		1000 PER BOX		5-641333-2	
		REELED △		641333-1	
		DESCRIPTION		PART NO.	
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN20FEB2007 L. HALL CHK20FEB2007 C. DOOLEY APVD20FEB2007 C. DOOLEY PRODUCT SPEC 108-1163 APPLICATION SPEC 114-6016 WEIGHT - CUSTOMER DRAWING		tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608 NAME MODULAR PLUG ASSEMBLY, 2 POSITION, LINE STRANDED WIRE SIZE CAGE CODE DRAWING NO RESTRICTED TO A2 00779 C-641333 -	
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:				
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH				
MATERIAL - △	- △				
		SCALE 5:1		SHEET 1 of 1	REV N