
Part Number : 513531600
Product Description : 2.00mm Pitch MicroClasp Wire-to-Board Receptacle Housing, Positive Lock, Dual Row, 16 Circuits, White
Series Number : 51353
Status : Active
Product Category : Connector Housings

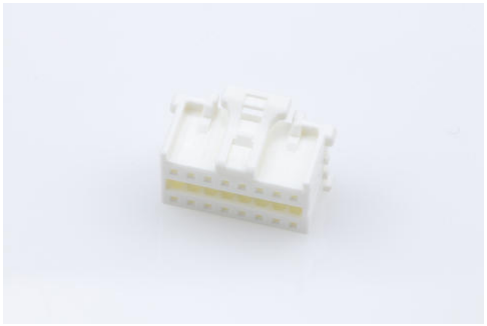

Documents & Resources

Drawings

513531600_sd.pdf

3D Models and Design Files

STEP AP242

SOLIDWORKS

Creo

Specifications

561340000-AS-000.pdf

SPK-51353-001-001.pdf

PS-51353-003-001.pdf

PS-51353-010-001.pdf

Product Environment Compliance

Compliance

GADSL/IMDS	Compliant with Exemption 44
China RoHS	per SJ/T 11365-2006
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2025)4165-DC (25 June 2025)
EU RoHS	Compliant per EU 2015/863

Compliance Statements

- EU RoHS
- REACH SVHC
- Low-Halogen

Industry Documents
- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

Substances of Interest
- PFAS

EU RoHS Certificate of Compliance

Additional Product Compliance Information

Part Details

General

Status	Active
Category	Connector Housings
Series	51353
Description	2.00mm Pitch MicroClasp Wire-to-Board Receptacle Housing, Positive Lock, Dual Row, 16 Circuits, White
Application	Signal, Wire-to-Board
Product Name	MicroClasp
UPC	800756611129

Agency

UL	E29179

Physical

Circuits (maximum)	16
Color - Resin	White
Flammability	94V-0
Gender	Receptacle
Glow-Wire Capable	No
Lock to Mating Part	Yes
Material - Resin	Nylon

Net Weight	806.000/mg
Number of Rows	2
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface	2.00mm
Stackable	No
Temperature Range - Operating	-40° to +105°C

Mates With / Use With

Mates with Part(s)

Description	Part Number
MicroClasp Vertical Dual Row Headers	501844
MicroClasp Vertical Dual Row Headers	55917
MicroClasp Right-Angle Dual Row Headers	55959

Use with Part(s)

Description	Part Number
Pre-Crimped Lead MicroClasp Female-to-MicroClasp Female, Tin (Sn) Plating, 150.00mm Length, 24 AWG, Black	797581001
Pre-Crimped Lead MicroClasp Female-to-MicroClasp Female, Tin (Sn) Plating, 300.00mm Length, 24 AWG, Black	797581002
2.00mm Pitch Crimp Terminal, Female, 28-22 AWG, Copper Alloy, Reel	561349000
2.00mm Pitch Crimp Terminal, Female, 28-22 AWG, Copper Alloy, Bag	561349100
MicroClasp Terminal Position Assurance (TPA) Retainers	500638

This document was generated on Sep 22, 2025