


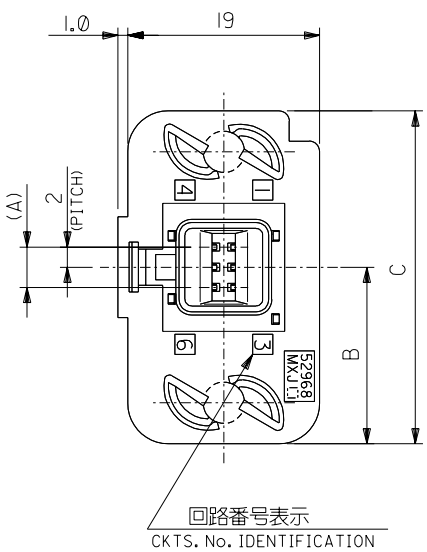


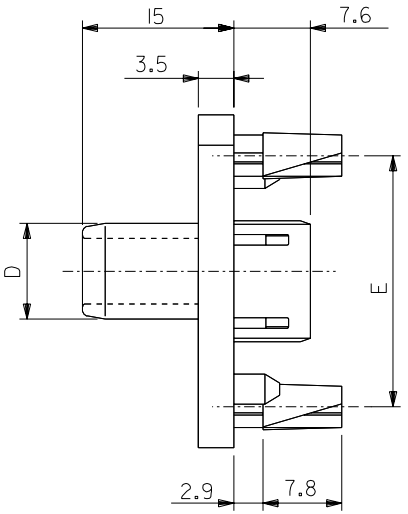

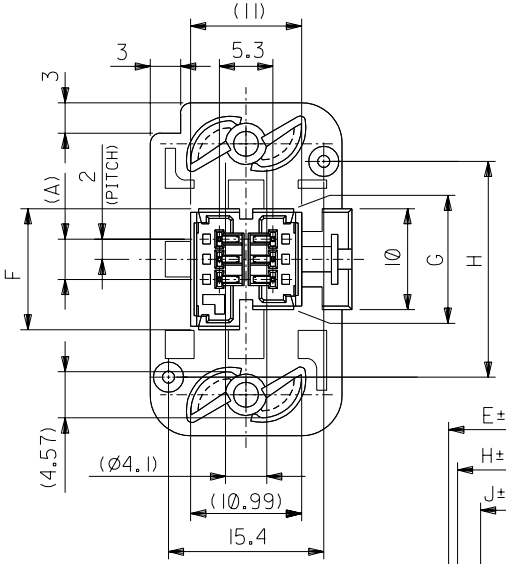

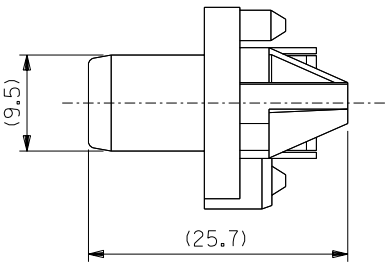

注)
NOTES;


1. 材質
MATERIAL
ハウシング：ポリカーボネート　UL94V-0　黒
HOUSING　：POLYCARBONATE, UL94V-0, BLACK
ターミナル：りん青銅
TERMINAL　：PHOSPHOR BRONZE

2. ターミナルメッキ仕様
TERMINAL PLATING
金メッキ　：0.25μmMIN.（接点部）
GOLD：0.25μm MIN.(CONTACT AREA)
錫メッキ　：1μm　MIN.（リセプタクル嵌合部）
TIN-LEAD：1μm MIN.(RECEPTACLE CONNECTED AREA)
ニッケルメッキ：1μm　MIN.（下地メッキ）
NICKEL：1μm MIN.(UNDER PLATING)

3. 適合リセプタクル：52484-**10,51090-**00
APPRICABLE RECEPTACLE：52484-**10,51090-**00

4. 嵌合相手：53717-**19
MATES WITH:53717-**19

5. 本製品は　52968-**11　の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 52968-**11.

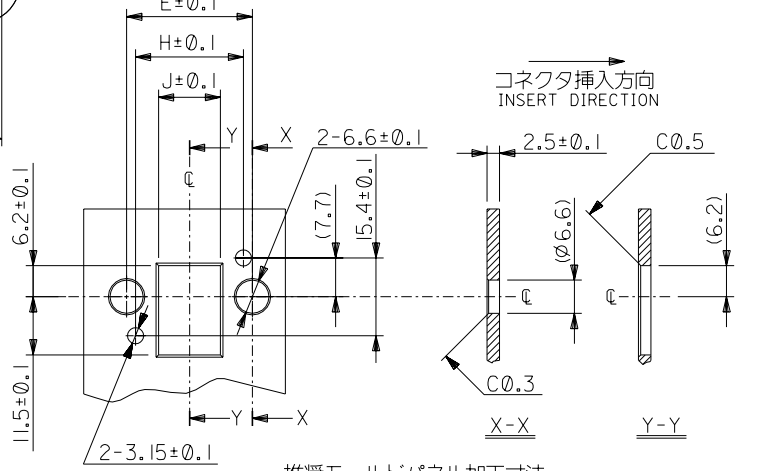

推奨モールドパネル加工寸法
PANEL CUT DIMENSIONS

12.3	21.4	10	12	24.9	9.5	33	17.5	4	52968-0619	52968-**19	6
J	H	G	F	E	D	C	B	(A)	MATERIAL NO.	MODEL NO.	CKT.

DO NOT SCALE DRAWING

04NO. DRWN: CH'K: APPR:	03NO. DRWN: CH'K: APPR:	02NO. DRWN: CH'K: APPR:	01NO. DRWN: CH'K: APPR:	00NO. J2004-2419 DRWN: M.NINOMIYA CH'K: K.TOJO APPR: M.SASAO	RELEASED '04/02/13 DESCRIPTION
				0	REV

MATERIAL 材料: SEE NOTE
FINISH 仕上げ: SEE NOTE
WIRE RANGE 適用電線範囲: —#—
INS. RANGE 被覆外径: —#—

GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差

10 UNDER 未満	±0.2
10 OVER 以上 30 UNDER 未満	±0.25
30 OVER 以上	±0.3
ANGLE 角度	±3°

SCALE 2-1 | DESIGN UNITS ☒mm ☐INCH | THIRD ANGLE PROJECTION
DIMENSIONS: ☐mm/INCH ☐INCH/mm ☒mm ONLY
SHT REV
DRAWN BY & DATE M.NINOMIYA '04/02/13
CHECKED BY & DATE K.TOJO '04/02/13
APPROVED BY & DATE M.SASAO '04/02/13
CAD FILENAME SD-52968-008.S01
TITLE: 2mm PITCH FLOATING CONN. REC. HS'G ASS'Y -LEAD FREE-
molex MOLEX INCORPORATED
MATERIAL NO. SEE CHART
DRAWING NO. SD-52968-008
SHEET NO. 1 OF 1
SIZE B

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.