




TE Internal #: 5749264-1

4 Position, Circular Mini DIN, Fully Loaded, Wire-to-Board, 6.5 mm [.26 in] Centerline, Printed Circuit Board, Signal, Board Mount, DIN Connectors

[View on TE.com >](#)

Connectors > Circular Connectors > DIN Connectors

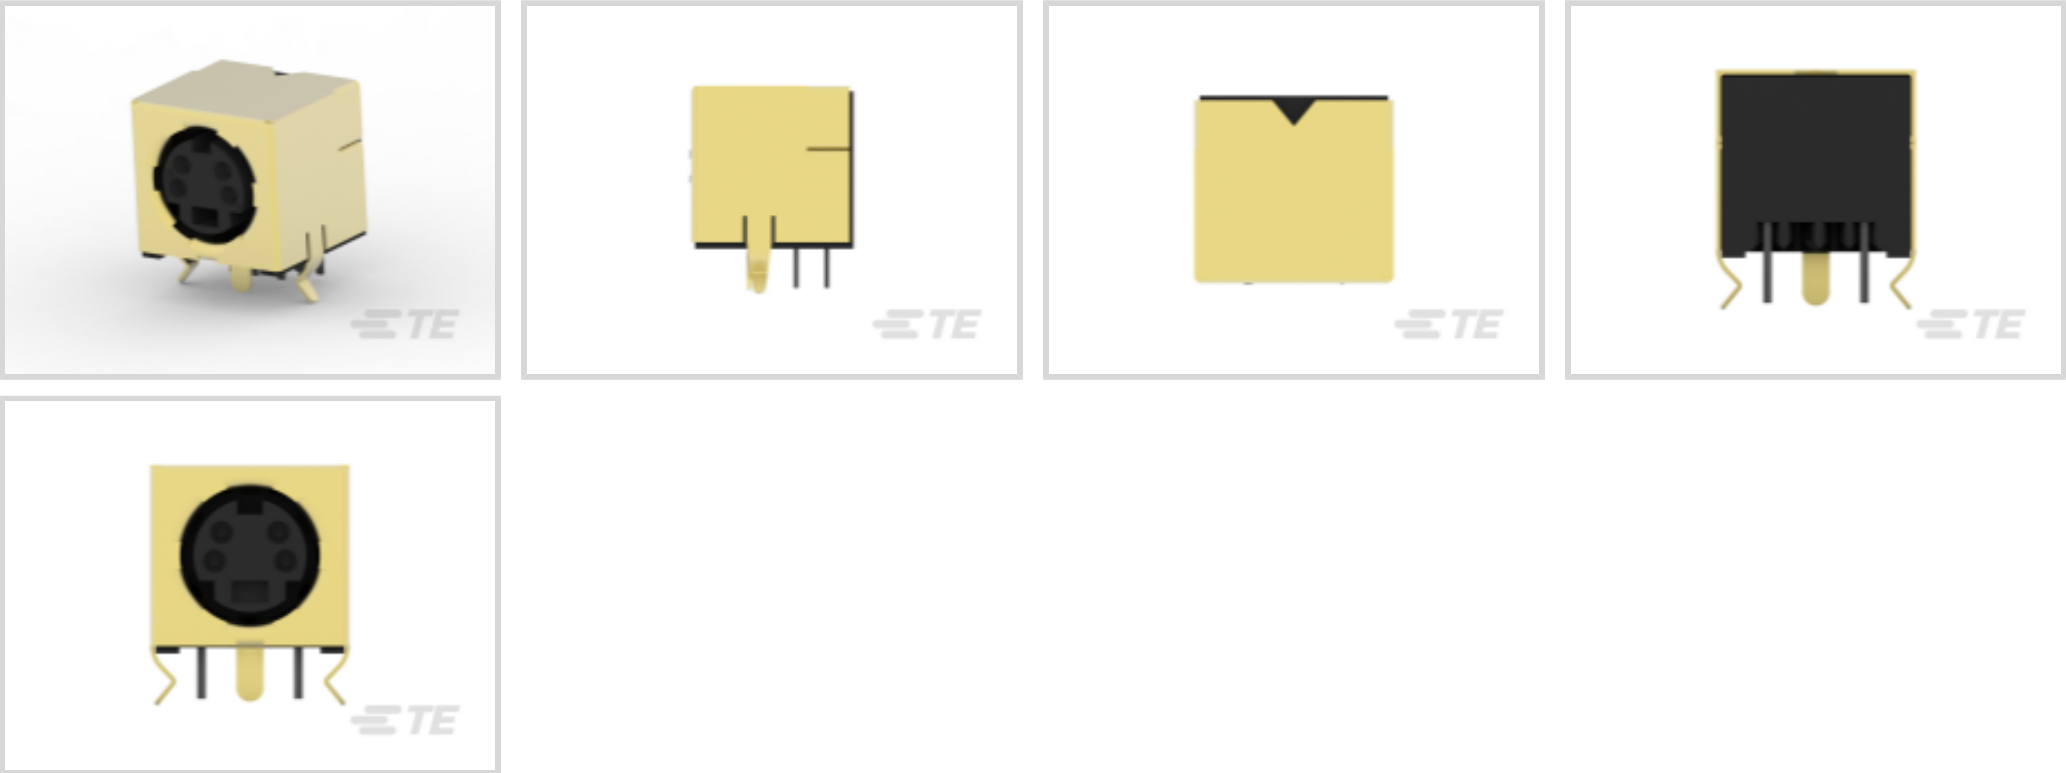

Circular DIN Connector Type: **Circular Mini DIN**

Connector System: **Wire-to-Board**

Number of Positions: **4**

Connector Contact Load Condition: **Fully Loaded**

Mating Alignment Type: **Polarization**

Features

Product Type Features

Circular DIN Connector Type	Circular Mini DIN
Connector System	Wire-to-Board
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

PCB Mount Orientation	Right Angle
Number of Positions	4
Connector Contact Load Condition	Fully Loaded

Electrical Characteristics

Operating Voltage	30 VAC
-------------------	--------

Body Features

Shield Plating Finish	Bright
Shield Plating Material	Tin
Shield Material	Copper Alloy
Panel Ground Feature Type	None



Primary Product Color	Black
-----------------------	-------

Contact Features

Contact Underplating Material	Nickel
Contact Underplating Material Thickness	1.27 µm[50 µin]
PCB Contact Termination Area Plating Material Finish	Matte
Contact Mating Area Plating Material Thickness	.76 µm[30 µin]
Contact Shape & Form	Tuning Fork
PCB Contact Termination Area Plating Material Thickness	3.05 µm, 4.02 µm[170 µin]
Contact Layout	Staggered
Contact Mating Area Plating Material	Gold (Au)
Contact Base Material	Copper Alloy
PCB Contact Termination Area Plating Material	Tin
Contact Current Rating (Max)	.5 A

Termination Features

Termination Method to PCB	Through Hole - Solder
Termination Post & Tail Length	3.18 mm[.125 in]

Mechanical Attachment

Panel Mount Feature	With
Panel Mount Feature Type	Screw Nut
Mating Alignment	With
PCB Mount Alignment	With
PCB Mount Alignment Type	Hold-Down
Mating Alignment Type	Polarization
PCB Mount Retention	Without
PCB Mount Retention Type	Hold-Down Post
Connector Mounting Type	Board Mount

Housing Features

Housing Material	Thermoplastic
Centerline (Pitch)	6.5 mm[.26 in]

Dimensions

Product Width	14 mm[.55 in]
Product Length	16.51 mm[.65 in]



PCB Thickness (Recommended)	2.68 mm[.11 in]
Connector Height	12.83 mm[.5 in]

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Shielded	Yes
Circuit Application	Signal

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Quantity	40
Packaging Method	Tube

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



Customers Also Bought



TE Part #EC0573-000
06161202



TE Part #5-146280-2
02 MODII HDR SRST B/A .100CL




TE Part #5-747912-2
25 Plug Solder Cup, Gold Flash



TE Part #5-747913-2
25 Rcpt Solder Cup, Gold Flash



TE Part #2-1445055-6
MICRO MNL HDR ASSY S/ROW LF

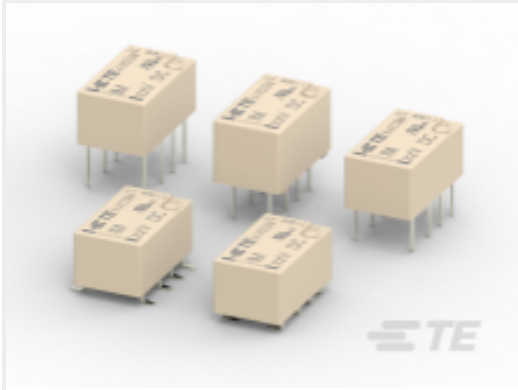


TE Part #CAT-AX41-IM11B
Standard Signal Relay 2 Form C,2 CO Cont



TE Part #1658613-2
25 POS HDF PLUG, MS, LEAD FREE



TE Part #2311763-2
AMPL REC, HD22, R/A, 15P, THREADED

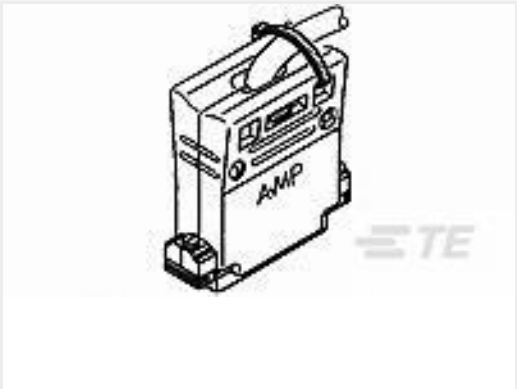

TE Part #5206472-1
CABLE CLAMP KIT,SZ 3

Documents

Product Drawings
Mini DIN, 4 pos, R/A, Shield
English

CAD Files
3D PDF
English

Customer View Model
ENG_CVM_5749264-1_O.2d_dxf.zip
English

Customer View Model
ENG_CVM_5749264-1_O.3d_igs.zip
English

Customer View Model
ENG_CVM_5749264-1_O.3d_stp.zip
English



3D PDF

3D

Customer View Model

[ENG_CVM_CVM_5749264-1_A.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_5749264-1_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_5749264-1_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English