



Keylock Rotary Switches


SERIES 58 Single Deck, Antistatic

LOCK FEATURES

- Minimum Space Behind Panel
- 15,000 Vdc Static Protection
- 5 Tumbler-Plate Security
- In-Panel Key Recoding


SWITCH FEATURES

- Economical
- Solder Lug or PC Mount
- 36°, 45°, 60°, or 90° Throws
- 1 or 2 Poles Per Switch
- Up to 10 Positions for 1 Pole
- 200 mA for 25,000 Cycles

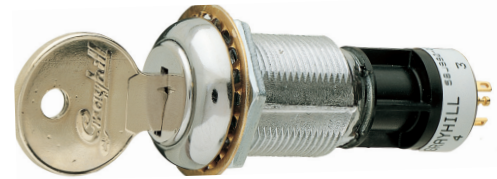


DIMENSIONS in inches (and millimeters)

Standard Style

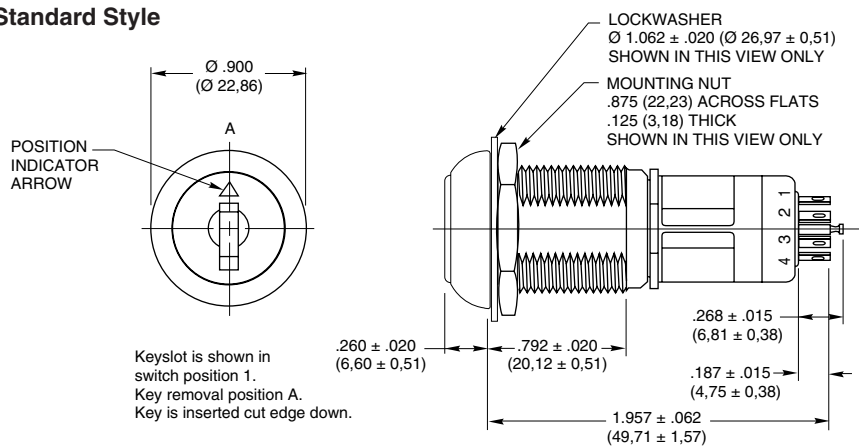


36°, 45°, 60°, or 90° Angle of Throw




PC Mount Style

Dimensions not shown are the same as above.

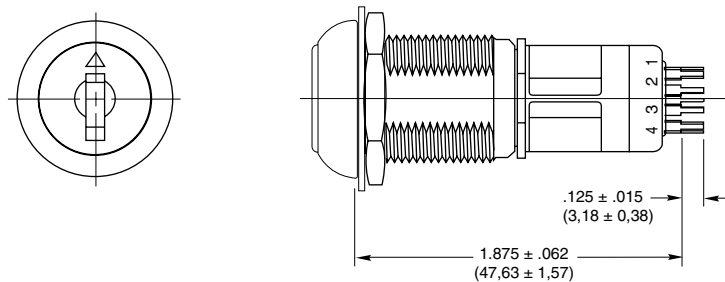


36°, 45°, 60°, or 90° Angle of Throw



Grayhill part number and date code marked on label. Customer part number marked on request.


TERMINAL DETAIL

Solder Lug




A = $.064 \pm .005$ (1,63 $\pm$ 0,13)
B = $.032 \pm .004$ (0,81 $\pm$ 0,10)

Solder Lug Common




C = $.050 \pm .010$ (1,27 $\pm$ 0,25)
D = $.062 \varnothing \pm .002$ (1,57 $\varnothing \pm$ 0,05)
G = $.020 \pm .003$ (0,51 $\pm$ 0,08)
H = $.062 \pm .004$ (1,57 $\pm$ 0,10)

PC Mount




E = $.125 \pm .015$ (3,18 $\pm$ 0,38)
F = $.020 \pm .003$ (0,51 $\pm$ 0,08)

RECOMMENDED PANEL CUT



CIRCUITRY

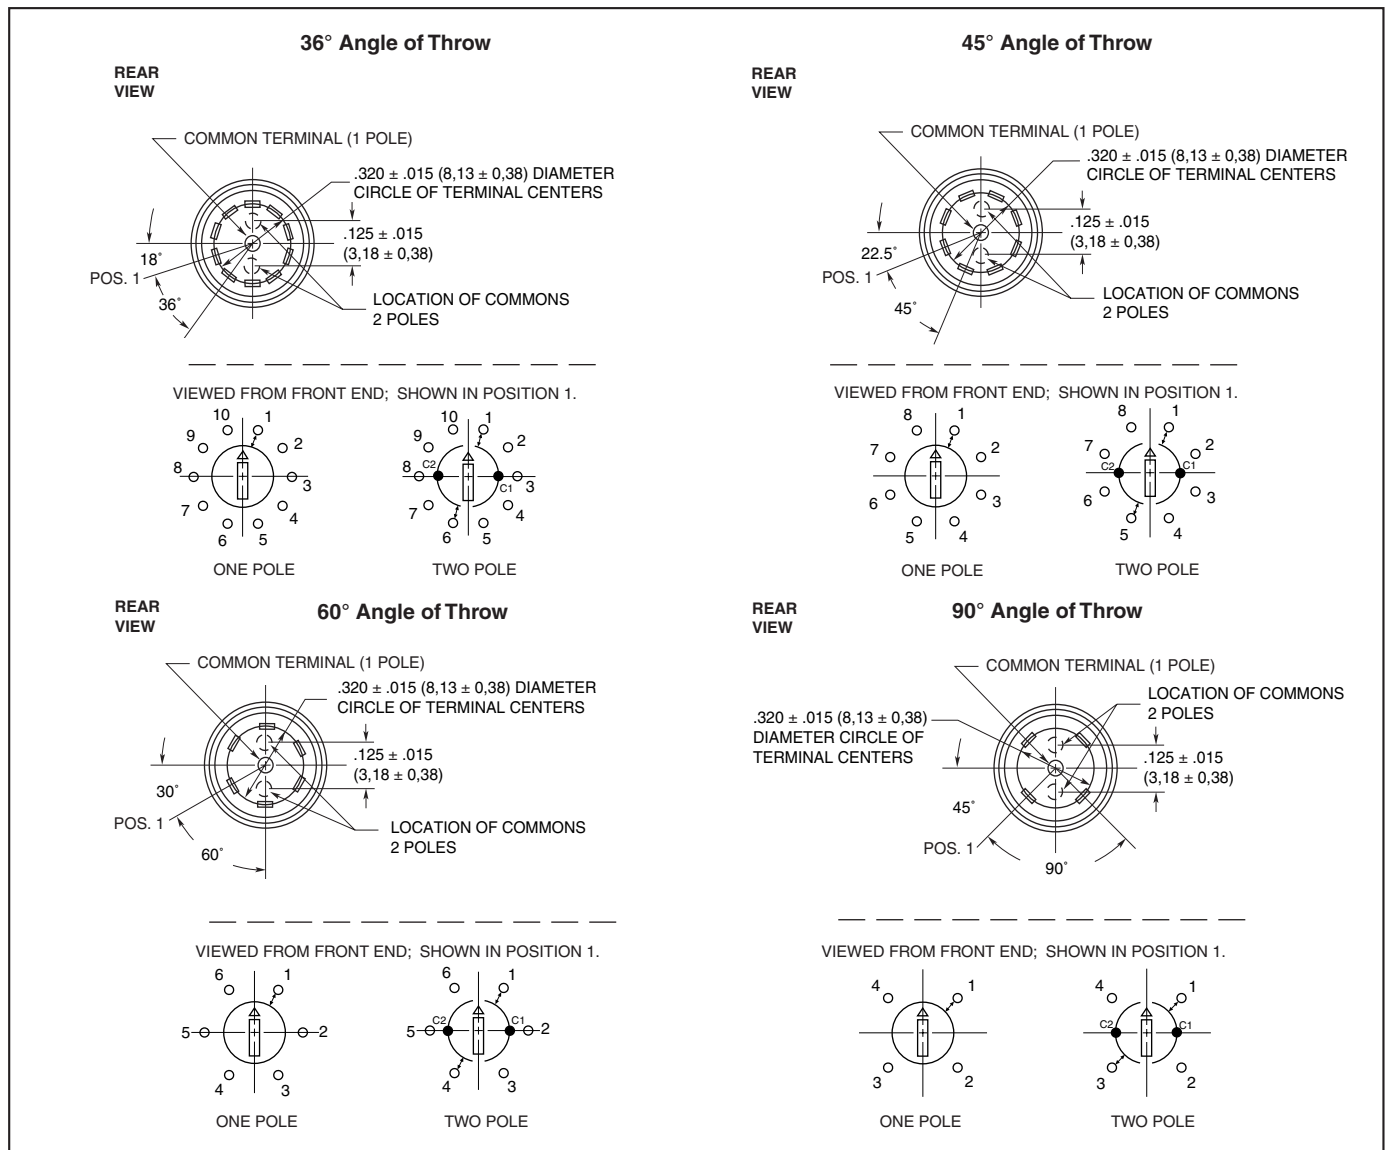

LOCK SPECIFICATIONS

General Characteristics

Mounting: By bushing, nut and lockwasher

Keying: All locks keyed alike except by special order

Orientation of Keylock Switch: Lock flats on both sides with key upright (cut side down) in position 1.

Key Removals:

36° Throw Switch	At every position or At 0° & 180°
45° Throw Switch	At every position or At 0°, 90°, 180°, 270°
60° Throw Switch	At every position or At 0°, 180°
90° Throw Switch	At every position or At 0°, 180°

Optional pulls Contact Grayhill

Materials & Finishes

Keys: Brass; 2 supplied

Lock Barrel & Plug: Zinc, clear chromate

Lockwasher: Steel, tin zinc plated

Mounting Nut: Steel, nickel-plated


Tumbler Plates: Brass

SWITCH SPECIFICATIONS

Electrical Characteristics

Chart is shown for non-shorting contacts and resistive load and for the life limiting criteria indicated below. The data for the curve was measured at sea level, 25°C and 68% relative humidity. Contact Grayhill for more information

if any of the following is true: life limiting criteria are more critical than those listed; more cycles of operation are required; a larger make and break current is required; the operating environment includes elevated temperatures or reduced pressures.

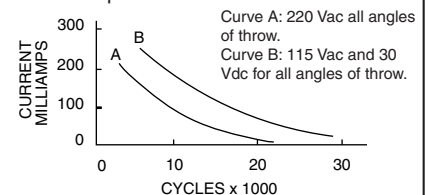



Keylock Rotary Switches

SWITCH SPECIFICATIONS *Continued*

Contact Resistance:

Initially: less than 10 mΩ
End of life: less than 50 mΩ

Insulation Resistance: (Between mutually insulated parts)

Initially: 50,000 MΩ
Minimum: 10,000 MΩ

Breakdown Voltage: (Between mutually insulated parts) more than 600 Vac

Life Expectancy: Per chart; cycle is 1 rotation thru all active positions plus a full return.

Carry Current: 6A; maximum temperature rise 20°C

Anti-Static Voltage: Anti-static types tested to withstand 15,000 Vdc

Mechanical Characteristics

Switching Mode: Shorting (make before break) or non-shorting (break before make) as limited by the Choices chart

Type of Contact: Wiping

Number of Terminals: All switches are provided with the full circle of terminals regardless of the number of active positions

Stop Strength: 1.70 Nm maximum (15.0 in-lbs)

Switching Torque: 8 to 16 in-ozs

Materials and Finishes

Switch Base: Thermoset plastic

Switch Housing: Nylon

Detent Rotor: Nylon

Detent Balls: Steel, nickel-plated

Detent Springs, and Contact Springs: Stainless steel

Common Ring: Brass, gold plate over silver plate

Terminals: Brass, gold over silver and nickel plate

Rotor Contact: Precious metal, gold alloy

CHOICES AND LIMITATIONS

Lock Style and Description*	Switch Style and Description	Angle of Throw	No. Of Decks	Poles/ Deck	Positions Per Pole**	Shorting or Non-Shrtg.
Series 58J Switches						
J4: Standard—Key pulls at Position 1 and at 90 Degree Increments	A = Standard, Solder Lugs P = Standard, PC Mount	45°	1	1 2	02 to 08 02 to 04	N or S N or S
J8: Standard—Key Pulls at Each Position	A = Standard, Solder Lugs P = Standard, PC Mount	36°	1	1 2	02 to 10 02 to 05	N or S N or S
		45°	1	1 2	02 to 08 02 to 04	N or S N or S
		90°	1	1 2	02 to 04 02	N N
J9: Standard—Key Pulls at Position 1 and at 180 Degrees	A = Standard, Solder Lugs P = Standard, PC Mount	36°	1	1 2	02 to 10 02 to 05	N or S N or S
		45°	1	1 2	02 to 08 02 to 04	N or S N or S
		60°	1	1 2	02 to 06 02 to 03	N N
		90°	1	1 2	02 to 04 02	N N

*Standard Keylock has anti-static protection. All keylock versions available without anti-static protection, with a reduced overall body length. Contact Grayhill for more information.

**For single pole switches with maximum positions, specify continuous rotation or fixed stop when ordering.

ORDERING INFORMATION

	Series Lock Style: per Choices Chart J4, J8, J9 Switch Style: per Choices Chart A or P Angle of Throw: 36, 45, 60 or 90 (per Choices chart) Number of Decks: 01 Poles per Deck: = 1 or 2 (per Choices chart) Positions per Pole: 02 thru 10 (per Choices chart) Type of Contacts: (per Choices chart) N = Non-shorting S = Shorting Stop Arrangement Suffix: (needed only for 1-pole switches with maximum positions) F = Fixed stop between last and first positions *Leave blank for continuous rotation
58J8A36-01-1-10N-F	

Available from your local Grayhill Distributor. For prices and discounts, contact a local Sales Office, an authorized local Distributor or Grayhill.