

PRODUCT NUMBER
67045–0XXLF
- INDICATES THE PRODUCT IS RoHS COMPATIBLE, SEE NOTE 2
- STYLE, SEE TABLE (AS AVAILABLE)


STYLE	SIZE	DIM "F"
06	2x 3	12.00
08	2x 4	14.54
10	2x 5	17.08
14	2x 7	22.16
16	2x 8	24.70
18	2x 9	27.24
20	2x10	29.78
26	2x13	37.40
30	2x15	42.48
34	2x17	47.56
40	2x20	55.18
44	2x22	60.26
50	2x25	67.88
60	2x30	80.58
64	2x32	85.66

EXTENDED RANGE
- TOOLING FEASIBILITY CONFIRMED
- SAMPLES ON DEMAND
- AVAILABILITY ON DEMAND



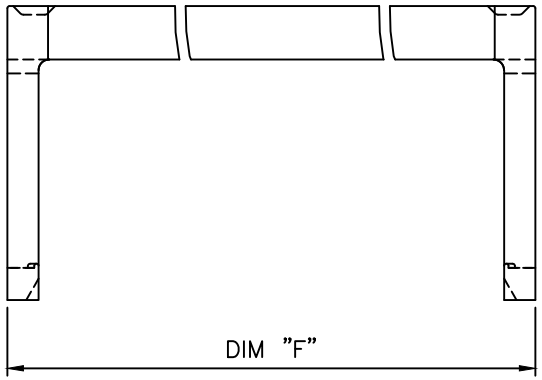

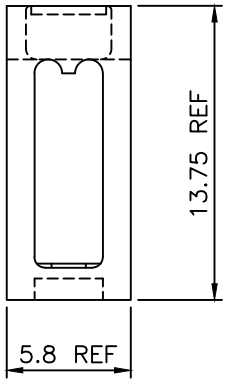

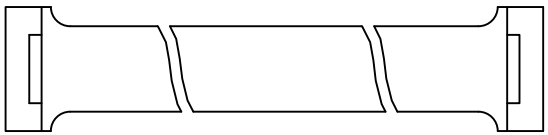

NOTES:

1 – MOLDING MATERIAL UNFILLED POLYESTER
FLAME RETARDANT PER UL–94–V0
COLOR GREY

2 – RoHS COMPATIBLE PRODUCT
- a – LABELLING:
  – MEETS PACKAGING SPECS AS PER GS–14–920
- b – LEGAL STATEMENT: SEE GS–22–008
- c – THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO MANUFACTURING SOLDER PROCESS
- d – PRODUCT MEETS WITH EU 2002/EG/95

3 – THIS PART SERIES IS NOT INITIALLY INTENDED FOR AUTOMOTIVE APPLICATIONS. ADDITIONAL FEES ARE CHARGEABLE FOR ANY ADDITIONAL QUALIFICATION AND TEST REPORTS PERFORMED OUTSIDE THE SCOPE OF THE STANDARD PRODUCT SPECIFICATIONS.

4 – UNLESS OTHERWISE APPROVED BY AMPHENOL, ALL PARTS AND COMPONENTS ARE DESIGNED & BUILT ACCORDING TO AMPHENOL'S SPECIFICATIONS WHICH ARE SUBJECT TO CHANGE WITHOUT NOTICE.

ltr	ecn no	dr	date
B	F80632	PNZ	98.10.16
C	F05–0255	LMU	05.10.11
D	F06–0270	LMU	06.09.12
E	F06–0274	LMU	06.10.18
F	F–55028	DDE	25.03.19

mat'l. code: SEE NOTES
surface: ISO 1302
tolerance: ISO 406 ISO 1101
tolerances unless otherwise specified: angles; linear .X ±0.3, .XX ±0.15, .XXX ±0.05
projection
mm
scale 1:4

dr	L.MULIN	05.10.11
engr	J.COMPAGNON	05.10.11
chr		
appd	J.COMPAGNON	05.10.11

sheet / revision
index / sheet

product family: QUICKIE III
title: STRAIN RELIEF LOW PROFILE
dwg no: 67045
sheet 1 of 1
size: A3
type: CUSTOMER
Drawing

Amphenol FCI
FCIconnect.com
Copyright FCI