



Certifications & Ratings

- RoHS compliant
- NEMA 4X (with gasket)
- IP66 (with gasket)

Application

The 679 Series LED Panel Mount Indicators are designed for a variety of applications such as:


- Main power indication
- Remote power indication
- Status indication
- Maintenance and warning indication
- Instrumentation

... and many more!



Dimensions

inches [mm]

Protruding

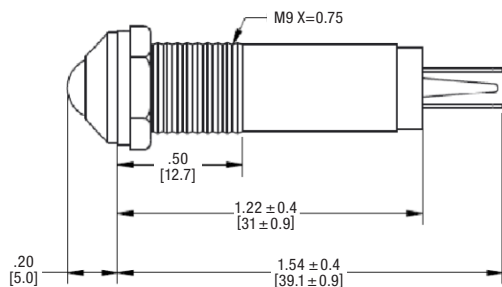

Recessed

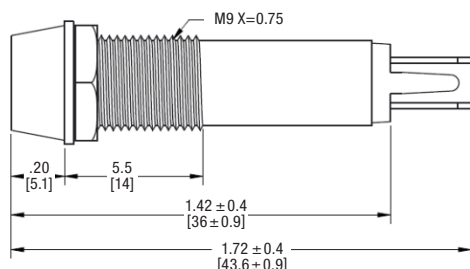


Mechanical Information

- Mounting Hole Size:** 0.374" (9.5 mm)
- Max Panel Thickness:** 0.374" (9.5 mm);
with Gasket: 0.318" (8.0 mm)
- Mounting Torque:** 0.362 lbs/ft (5 kg/cm)

Specifications

- Voltage Options:** 6, 12 & 24 V DC (no resistor required)
- Operating Temp:** -20°C to +75°C (-4°F to +167°F)
- Storage Temp:** -40°C to +100°C (-40°F to +212°F)
- Electrical Connection:** Solder terminals, 6" wire leads
- Housing:** Brass—Chrome or Black Plated
- Terminals:** Copper—Nickel Plated
- Lock washer:** Iron—Nickel Plated
- Nut:** Brass—Nickel Plated

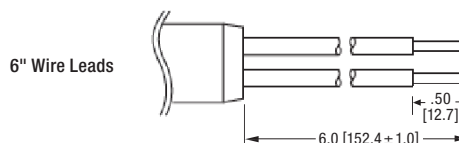



Ordering Information 679 Series

Part Number Guide

RoHS Compliant

6	7	9	-	X	X	X	X	-	3	X	X	F
LED Position				Termination				Lens Color*				
Protruding				1	2 Solder Terminals				1	● Red		
Recessed				2	5 6" Wire Leads				2	● Green		
				Plating				3	● Orange			
				1 Chrome				4	● Blue			
				2 Black				* Lens color same as LED color				
LED Color								Voltage				
● Red				1					2	6VDC		
● Green				2					3	12VDC		
● Orange				3					4	24VDC		
● Blue				4								

Protruding LED

Part Number / Termination		Color	Voltage (V DC)	Current (mA)	Intensity Typ. (mcd)	Plating	
Solder Terminals	6" Wire Leads						
679-1112-321F	679-1115-321F	Red	6	15	485	Chrome	
679-1212-322F	679-1215-322F	Green			5870		
679-1312-323F	679-1315-323F	Orange			1570		
679-1412-324F	679-1415-324F	Blue			215		
679-1112-331F	679-1115-331F	Red	12		485		Chrome
679-1212-332F	679-1215-332F	Green			5870		
679-1312-333F	679-1315-333F	Orange			1570		
679-1412-334F	679-1415-334F	Blue			215		
679-1112-341F	679-1115-341F	Red	24		485	Black	
679-1212-342F	679-1215-342F	Green			5870		
679-1312-343F	679-1315-343F	Orange			1570		
679-1412-344F	679-1415-344F	Blue			215		
679-1122-321F	679-1125-321F	Red	6		485		Black
679-1222-322F	679-1225-322F	Green			5870		
679-1322-323F	679-1325-323F	Orange			1570		
679-1422-324F	679-1425-324F	Blue			215		
679-1122-331F	679-1125-331F	Red	12		485	Black	
679-1222-332F	679-1225-332F	Green			5870		
679-1322-333F	679-1325-333F	Orange			1570		
679-1422-334F	679-1425-334F	Blue			215		
679-1122-341F	679-1125-341F	Red	24		485		Black
679-1222-342F	679-1225-342F	Green			5870		
679-1322-343F	679-1325-343F	Orange			1570		
679-1422-344F	679-1425-344F	Blue			215		

Recessed LED

Part Number / Termination		Color	Voltage (V DC)	Current (mA)	Intensity Typ. (mcd)	Plating	
Solder Terminals	6" Wire Leads						
679-2112-321F	679-2115-321F	Red	6	15	775	Chrome	
679-2212-322F	679-2215-322F	Green			5870		
679-2312-323F	679-2315-323F	Orange			1570		
679-2412-324F	679-2415-324F	Blue			270		
679-2112-331F	679-2115-331F	Red	12		775		Chrome
679-2212-332F	679-2215-332F	Green			5870		
679-2312-333F	679-2315-333F	Orange			1570		
679-2412-334F	679-2415-334F	Blue			270		
679-2112-341F	679-2115-341F	Red	24		775	Chrome	
679-2212-342F	679-2215-342F	Green			5870		
679-2312-343F	679-2315-343F	Orange			1570		
679-2412-344F	679-2415-344F	Blue			270		
679-2122-321F	679-2125-321F	Red	6		775		Black
679-2222-322F	679-2225-322F	Green			5870		
679-2322-323F	679-2325-323F	Orange			1570		
679-2422-324F	679-2425-324F	Blue			270		
679-2122-331F	679-2125-331F	Red	12		775	Black	
679-2222-332F	679-2225-332F	Green			5870		
679-2322-333F	679-2325-333F	Orange			1570		
679-2422-334F	679-2425-334F	Blue			270		
679-2122-341F	679-2125-341F	Red	24		775		Black
679-2222-342F	679-2225-342F	Green			5870		
679-2322-343F	679-2325-343F	Orange			1570		
679-2422-344F	679-2425-344F	Blue			270		

Dialight reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: www.dialightsignalsandcomponents.com

Warranty Statement: Except for the warranty expressly provided for [herein/above/below], Dialight disclaims any and all other warranties, express or implied, including, without limitation, any warranties of merchantability, fitness for a particular purpose, title, and noninfringement.