



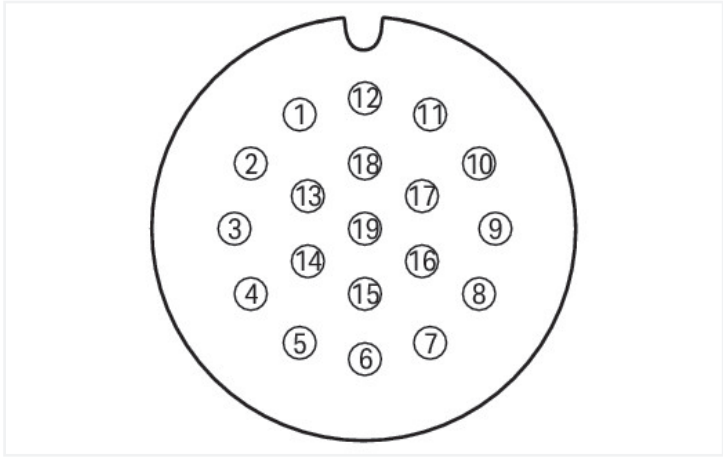

Pin 6, 12, 19: 1,00 mm²;
Pin 1 - 5, 7 - 11, 13 - 19: 0,34 mm²

1	violett	11	schwarz
2	rot	12	grün-gelb
3	grau	13	gelb-braun
4	rot-blau	14	braun-grün
5	grün	15	weiß
6	blau	16	gelb
7	grau-rosa	17	rosa
8	weiß-grün	18	grau-braun
9	weiß-gelb	19	braun
10	weiß-grau		

Color: ■ black

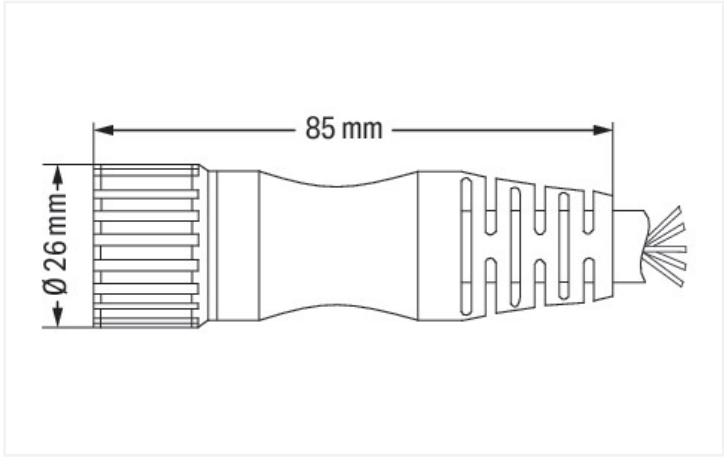

Dimensions in mm

Technical data	
Connection type	M23 socket - free end
Pole number	19
Cable connection direction to mating direction	0°
Cable length	15 m
Operating voltage	≤ 300 V
Operating current	8 A
Operating current	10 mm ² 1 A
Rated impulse withstand voltage	≥ 2.0 kV rms



Mechanical data		
Bending cycles		2 million
Drag chain capability		Yes
Weight		2089 g
Color		black

Environmental requirements		
Ambient (operating) temperature (dynamic)		-25 ... +80 °C
Ambient (operating) temperature (static)		-40 ... +90 °C
Protection type		IP67
Fire load		0 MJ

Commercial data		
Product Group		23 (I/O passive and accessories)
PU (SPU)		1 pcs
Packaging type		Box
Country of origin		DE
GTIN		4044918569064
Customs tariff number		85444290900

Product Classification		
UNSPSC		26121629
eCl@ss 10.0		27-06-03-11
eCl@ss 9.0		27-06-03-11
ETIM 9.0		EC001855
ETIM 10.0		EC001855
ECCN		NO US CLASSIFICATION

Environmental Product Compliance		
RoHS Compliance Status		Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search		
Environmental Product Compliance		↓
756-3203/190-150		

Documentation

System Description		
Sensor/Actuator Boxes – General Product Information	pdf 428.34 KB	↓



CAD/CAE-Data

CAE data	
WSCAD Universe 756-3203/190-150	