



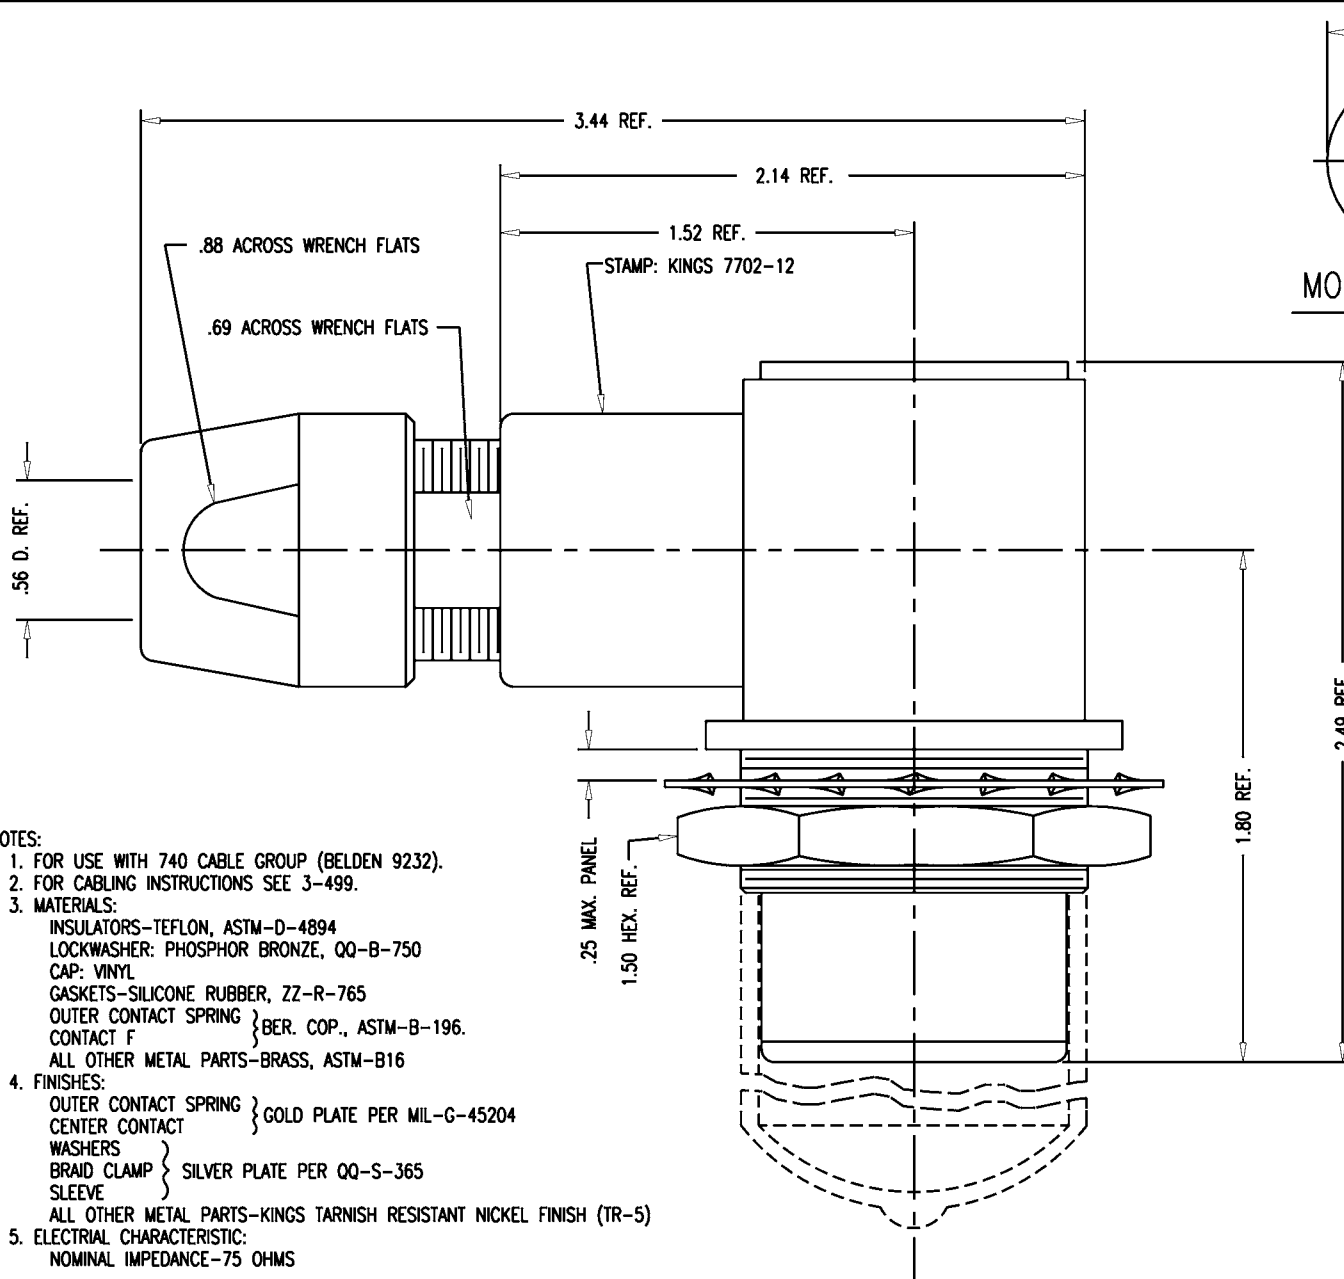

NOTES:

- FOR USE WITH 740 CABLE GROUP (BELDEN 9232).
- FOR CABLING INSTRUCTIONS SEE 3-499.
- MATERIALS:
INSULATORS-TEFLON, ASTM-D-4894
LOCKWASHER: PHOSPHOR BRONZE, QQ-B-750
CAP: VINYL
GASKETS-SILICONE RUBBER, ZZ-R-765
OUTER CONTACT SPRING } BER. COP., ASTM-B-196.
CONTACT F
ALL OTHER METAL PARTS-BRASS, ASTM-B16
- FINISHES:
OUTER CONTACT SPRING } GOLD PLATE PER MIL-G-45204
CENTER CONTACT
WASHERS
BRAID CLAMP } SILVER PLATE PER QQ-S-365
SLEEVE
ALL OTHER METAL PARTS-KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
- ELECTRIAL CHARACTERISTIC:
NOMINAL IMPEDANCE-75 OHMS



GSD

GSD

7702-12

REVISIONS

ISSUE	CHANGES
0	ER 36034 KH 01/25/95
1	CN 37803 A HVN 04/12/99
2	CN 38864 E JPK 06/03/03
3	CN 38932 A TML 09/29/03

7702-12SD

SCALE 2:1

APPROX SURFACE AREA

WAS: E-18688

USED ON

REF:

JACK, ANGLE, BULKHEAD,
TRI-LOC

DRAWN KH DATE 01/25/95

DESIGN GA DATE 01/26/95

APPR. DW DATE 09/11/95

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

7702-12