
Resin-Molded, Radial-Lead Solid Tantalum Capacitors

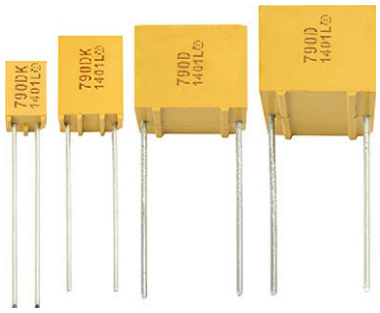

FEATURES

- Terminations: tin / lead (SnPb), 100 % tin (Sn)
- Four case sizes precisely molded with a flame retardant epoxy resin
- Stand off on all case sizes
- Available on tape for automatic insertion equipment (only A- and B-case, C- and D-case on request)
- Low leakage current
- Low impedance
- Extended value ranges available
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912

Pb-free Available

RoHS* Available

Note

* This datasheet provides information about parts that are RoHS-compliant and / or parts that are non RoHS-compliant. For example, parts with lead (Pb) terminations are not RoHS-compliant. Please see the information / tables in this datasheet for details

PERFORMANCE CHARACTERISTICS

Operating Temperature: -55 °C to +125 °C (above 85 °C, voltage derating is required)

Capacitance Range: 0.1 µF to 330 µF


Capacitance Tolerance: ± 10 %, ± 20 %


Voltage Rating: 6.3 V_{DC} to 50 V_{DC}

ORDERING INFORMATION

790D	157	X0	6R3	C	2	B	E3
MODEL	CAPACITANCE	CAPACITANCE TOLERANCE	DC VOLTAGE RATING	CASE CODE	STYLE NUMBER	PACKAGING	RoHS COMPLIANT
790D = standard and extended range	Expressed in picofarads. The first two digits are the significant figures. The third is the number of zeros following.	X0 = ± 20 % X9 = ± 10 %	Expressed in volts. To complete the three-digit block, zeros precede the voltage rating. A decimal point is indicated by an "R" (6R3 = 6.3 V)	See Ratings and Case Codes table	Insulated case (standard)	See packing information B: bulk G: ammopack (H = 16.5 mm) H: ammopack (H = 18.5 mm) I: ammopack shouldered leads (A case) X: reel pack (H = 16.5 mm) Y: reel pack (H = 18.5 mm) Z: reel pack shouldered leads (A case)	E3 = 100 % tin termination (RoHS-compliant) Blank = SnPb termination

DIMENSIONS in inches [millimeters]





CASE CODE	H MAX.	D MAX.	T MAX.	E ± 0.006 [0.15]	Ø 0.002 [0.05] (+10 %)
A	0.287 [7.3]	0.185 [4.7]	0.165 [4.2]	0.100 [2.54]	0.020 [0.5]
B	0.413 [10.5]	0.287 [7.3]	0.189 [4.8]	0.200 [5.08]	0.020 [0.5]
C	0.413 [10.5]	0.484 [12.3]	0.287 [7.3]	0.400 [10.16]	0.024 [0.6]
D	0.413 [10.5]	0.484 [12.3]	0.484 [12.3]	0.400 [10.16]	0.024 [0.6]

For technical questions, contact: tantalum@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

RATINGS AND CASE CODES

C_R (µF)	RATED VOLTAGE U_R AT +85 °C															
	6.3 V		10 V		16 V		20 V		25 V		35 V		40 V		50 V	
	CATEGORY VOLTAGE U_C AT +125 °C															
	4.0 V		6.3 V		10 V		13 V		16 V		23 V		25 V		32 V	
	STD.	EXT.	STD.	EXT.	STD.	EXT.	STD.	EXT.	STD.	EXT.	STD.	EXT.	STD.	EXT.	STD.	EXT.
0.10													A		A	
0.15														A	A	
0.22														A	A	
0.33													A			
0.47													A			
0.68															A	
1.0													A		A / B	
1.5									A				B		B	
2.2					A		A						B		B	
3.3					A							A	B	A	B	
4.7			A							A			B		B	
6.8	A							A					B		C	
10						A			B			B	C		C	
15				A	B		B			B			C		C	
22		A			B			B		B			C			
33			B			B			C			C		D		
47		B		B	C		C			D				D		
68				B	C			C								
100			C		D	C	D									
150	C			C		D										
220		C	D													
330	D															

STANDARD RATINGS / EXTENDED RATINGS

CAPACITANCE C_R (µF)	CASE CODE	PART NUMBER	MAX. DCL AT +25 °C (µA)	MAX. DF 120 Hz, AT +25 °C (%)	MAX. IMPEDANCE 100 kHz, AT +25 °C (Ω)
U_R = 6.3 V_{DC} AT +85 °C, SURGE = 8 V; U_C = 4 V_{DC} AT +125 °C, SURGE = 5 V					
6.8	A	790D685X(1)6R3A2(2)	1.0	6	4.0
22	**A**	**790D226X(1)6R3A2(2)**	**1.3**	**6**	**2.1**
47	B	790D476X(1)6R3B2(2)	2.9	6	1.3
68	**B**	**790D686X(1)6R3B2(2)**	**4.2**	**6**	**1.3**
150	C	790D157X(1)6R3C2(2)	9.4	6	0.6
220	**C**	**790D227X(1)6R3C2(2)**	**13.8**	**6**	**0.6**
330	D	790D337X(1)6R3D2(2)	20.7	8	0.4

Notes

- Part number definitions:
  (1) Insert 0 for ± 20 % tolerance or 9 for ± 10 %
  (2) See Ordering Information, packaging code
- Extended ratings in bold print

For technical questions, contact: tantalum@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

STANDARD RATINGS / EXTENDED RATINGS

CAPACITANCE C_R (µF)	CASE CODE	PART NUMBER	MAX. DCL AT +25 °C (µA)	MAX. DF 120 Hz, AT +25 °C (%)	MAX. IMPEDANCE 100 kHz, AT +25 °C (Ω)
U_R = 10 V_{DC} AT +85 °C, SURGE = 13 V; U_C = 6.3 V_{DC} AT +125 °C, SURGE = 8 V					
4.7	A	790D475X(1)010A2(2)	1.0	6	4.0
15	**A**	**790D156X(1)010A2(2)**	**1.5**	**6**	**2.5**
33	B	790D336X(1)010B2(2)	3.3	6	1.3
47	**B**	**790D476X(1)010B2(2)**	**4.7**	**6**	**1.4**
68	**B**	**790D686X(1)010B2(2)**	**6.8**	**6**	**1.3**
100	C	790D107X(1)010C2(2)	10.0	6	0.6
150	**C**	**790D157X(1)010C2(2)**	**15.0**	**6**	**0.6**
220	D	790D227X(1)010D2(2)	22.0	8	0.4
U_R = 16 V_{DC} AT +85 °C, SURGE = 20 V; U_C = 10 V_{DC} AT +125 °C, SURGE = 13 V					
2.2	A	790D225X(1)016A2(2)	1.0	6	5.5
3.3	A	790D335X(1)016A2(2)	1.0	6	4.4
10	**A**	**790D106X(1)016A2(2)**	**1.6**	**6**	**2.7**
15	B	790D156X(1)016B2(2)	2.4	6	1.6
22	B	790D226X(1)016B2(2)	3.5	6	1.3
33	**B**	**790D336X(1)016B2(2)**	**5.2**	**6**	**1.6**
47	C	790D476X(1)016C2(2)	7.5	6	0.8
68	C	790D686X(1)016C2(2)	10.8	6	0.6
100	**C**	**790D107X(1)016C2(2)**	**16.0**	**6**	**0.7**
100	D	790D107X(1)016D2(2)	16.0	6	0.5
150	D	790D157X(1)016D2(2)	24.0	8	0.4
U_R = 20 V_{DC} AT +85 °C, SURGE = 26 V; U_C = 13 V_{DC} AT +125 °C, SURGE = 16 V					
2.2	A	790D225X(1)020A2(2)	1.0	6	5.5
6.8	**A**	**790D685X(1)020A2(2)**	**1.3**	**6**	**3.5**
15	B	790D156X(1)020B2(2)	3.0	6	1.5
22	**B**	**790D226X(1)020B2(2)**	**4.4**	**6**	**2.1**
47	C	790D476X(1)020C2(2)	9.4	6	0.7
68	**C**	**790D686X(1)020C2(2)**	**13.6**	**6**	**0.8**
100	D	790D107X(1)020D2(2)	20.0	6	0.7
U_R = 25 V_{DC} AT +85 °C, SURGE = 32 V; U_C = 16 V_{DC} AT +125 °C, SURGE = 20 V					
1.5	A	790D155X(1)025A2(2)	1.0	6	6.0
4.7	**A**	**790D475X(1)025A2(2)**	**1.1**	**6**	**4.5**
10	B	790D106X(1)025B2(2)	2.5	6	1.6
15	**B**	**790D156X(1)025B2(2)**	**3.7**	**6**	**2.4**
22	**B**	**790D226X(1)025B2(2)**	**5.5**	**6**	**2.1**
33	C	790D336X(1)025C2(2)	8.2	6	0.8
47	D	790D476X(1)025D2(2)	11.8	6	1.0
U_R = 35 V_{DC} AT +85 °C, SURGE = 45 V; U_C= 23 V_{DC} AT +125 °C, SURGE = 29 V					
3.3	**A**	**790D335X(1)035A2(2)**	**1.2**	**6**	**6.0**
10	**B**	**790D106X(1)035B2(2)**	**3.5**	**6**	**2.6**
33	**C**	**790D336X(1)035C2(2)**	**11.6**	**6**	**1.3**

Notes

- Part number definitions:
  (1) Insert 0 for ± 20 % tolerance or 9 for ± 10 %
  (2) See Ordering Information, packaging code
- Extended ratings in bold print

For technical questions, contact: tantalum@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

STANDARD RATINGS / EXTENDED RATINGS

CAPACITANCE C_R (µF)	CASE CODE	PART NUMBER	MAX. DCL AT +25 °C (µA)	MAX. DF 120 Hz, AT +25 °C (%)	MAX. IMPEDANCE 100 kHz, AT +25 °C (Ω)
U_R = 40 V_{DC} AT +85 °C, SURGE = 52 V; U_C = 25 V_{DC} AT +125 °C, SURGE = 32 V					
0.10	A	790D104X(1)040A2(2)	1.0	6	30.0
0.15	A	790D154X(1)040A2(2)	1.0	6	24.0
0.22	A	790D224X(1)040A2(2)	1.0	6	18.0
0.33	A	790D334X(1)040A2(2)	1.0	6	14.0
0.47	A	790D474X(1)040A2(2)	1.0	6	11.0
1.0	A	790D105X(1)040A2(2)	1.0	6	6.5
1.5	B	790D155X(1)040B2(2)	1.0	6	5.2
2.2	B	790D225X(1)040B2(2)	1.0	6	4.0
3.3	A	790D335X(1)040A2(2)	1.3	6	2.8
3.3	B	790D335X(1)040B2(2)	1.3	6	2.8
4.7	B	790D475X(1)040B2(2)	1.8	6	2.0
6.8	B	790D685X(1)040B2(2)	2.7	6	1.6
10	C	790D106X(1)040C2(2)	4.0	6	1.3
15	C	790D156X(1)040C2(2)	6.0	6	1.0
22	C	790D226X(1)040C2(2)	8.8	6	0.8
33	D	790D336X(1)040D2(2)	13.2	6	0.6
47	D	790D476X(1)040D2(2)	18.8	6	0.5
U_R = 50 V_{DC} AT +85 °C, SURGE = 65 V; U_C = 32 V_{DC} AT +125 °C, SURGE = 41 V					
0.10	A	790D104X(1)050A2(2)	1.0	6	30
0.15	A	790D154X(1)050A2(2)	1.0	6	24
0.22	A	790D224X(1)050A2(2)	1.0	6	18
0.68	A	790D684X(1)050A2(2)	1.0	6	8.0
1.0	A	790D105X(1)050A2(2)	1.0	6	6.5
1.0	B	790D105X(1)050B2(2)	1.0	6	6.5
1.5	B	790D155X(1)050B2(2)	1.0	6	5.2
2.2	B	790D225X(1)050B2(2)	1.1	6	4.0
3.3	B	790D335X(1)050B2(2)	1.6	6	2.8
4.7	B	790D475X(1)050B2(2)	2.3	6	2.0
6.8	C	790D685X(1)050C2(2)	3.4	6	1.6
10	C	790D106X(1)050C2(2)	5.0	6	1.3
15	C	790D156X(1)050C2(2)	7.5	6	1.0


Notes

- Part number definitions:
  (1) Insert 0 for ± 20 % tolerance or 9 for ± 10 %
  (2) See Ordering Information, packaging code
- Extended ratings in bold print


For technical questions, contact: tantalum@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

MAXIMUM PERMISSIBLE RIPPLE VOLTAGE AT +25 °C


CASE SIZE "A"

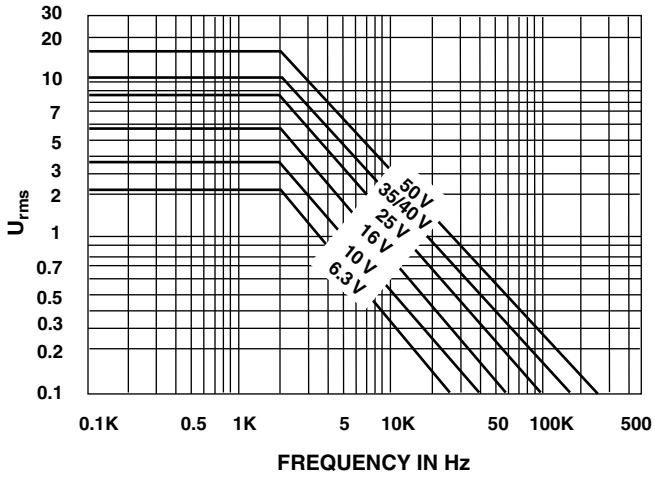


CASE SIZE "B"

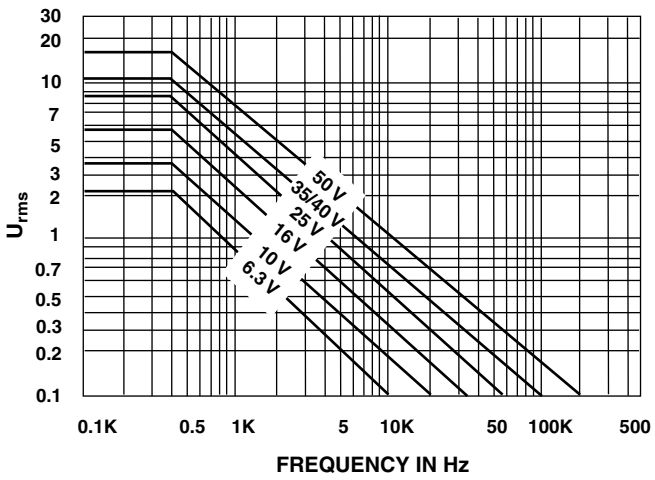


CASE SIZE "C"

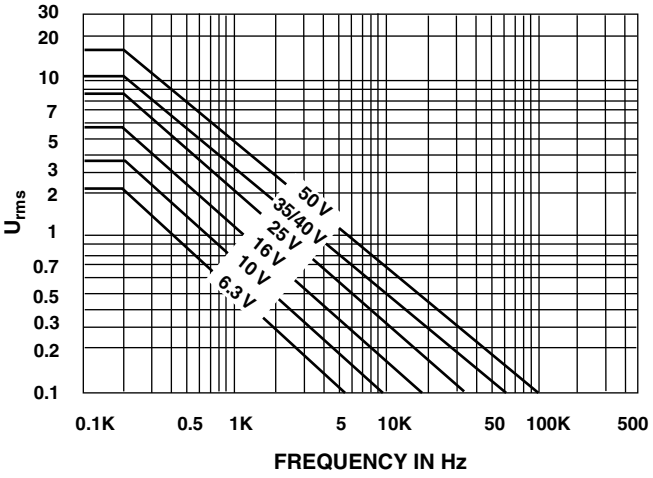


CASE SIZE "D"

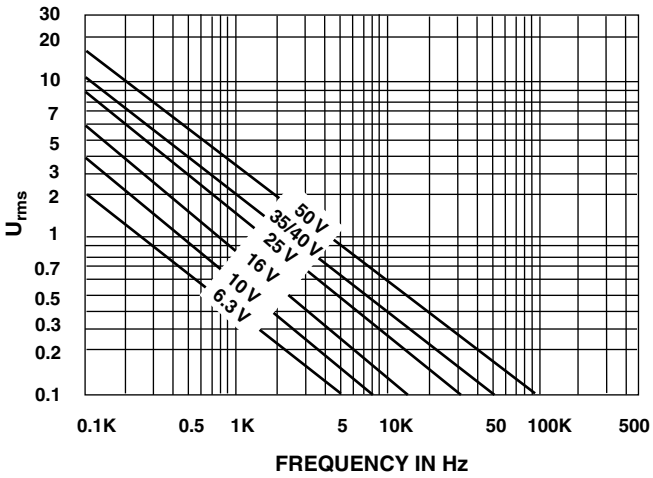

TYPICAL CURVES OF IMPEDANCE VS FREQUENCY

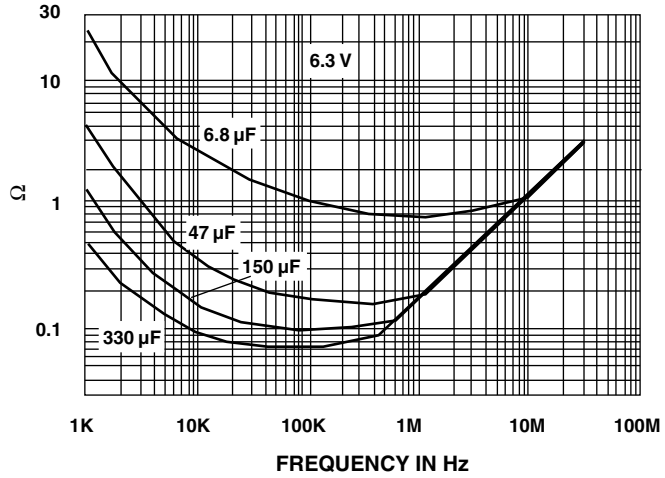

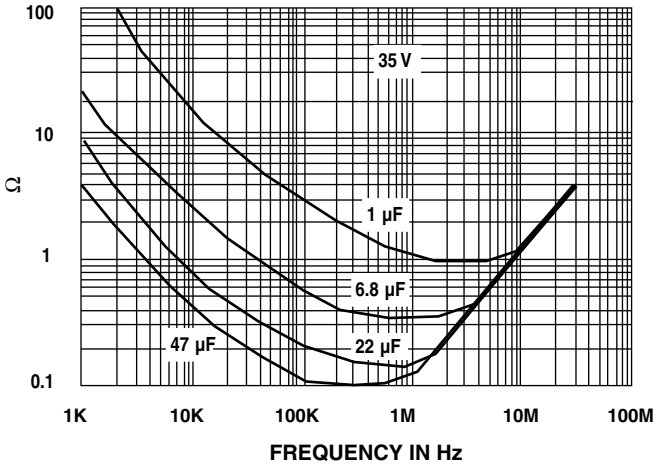

For technical questions, contact: tantalum@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

PACKAGING QUANTITIES			
CASE CODE	TAPE AND REEL	AMMO	BULK
A	1000	1000	500
B	1000	1000	250
C	300	300	100
D	200	200	50

PERFORMANCE CHARACTERISTICS


1. **Operating Temperature:** -55 °C to +85 °C with rated voltage U_R applied. +85 °C to 125 °C with linear voltage derating to category voltage U_C (see general information) applied.
2. **Capacitance and Tolerance:** capacitance measured at 100 Hz and +25 °C shall be within the specified tolerance limits of the nominal rating.
3. **Reverse Voltage:** 15 % of rated voltage at +25 °C
   5 % of rated voltage at +85 °C
4. **Surge Voltage:** 130 % of U_R at +85 °C
   130 % of U_C at +125 °C
5. **Impedance at 100 kHz:** measured at +20 °C ± 5 °C, impedance shall not exceed the values listed in datasheet.
6. **Stability at low and high temperatures:** capacitance change with temperature, dissipation factor and DC leakage current shall not exceed the limits of the following table.

TEMP.	CAPACITANCE CHANGE	DISSIPATION FACTOR $C_RU_R \leq 1900$ / $C_RU_R > 1900$	LEAKAGE CURRENT I_L
-55 °C	-10 %	9 % / 11 %	-
+25 °C	-	6 % / 8 %	0.01 x C_R x U_R or 1 µA, whichever is greater
+85 °C	+12 %	9 % / 11 %	0.1 x C_R x U_R or 10 µA, whichever is greater
+125 °C	+15 %	12 % / 14 %	0.125 x C_R x U_R or 12.5 µA, whichever is greater

7. **Life Test:** 2000 h at +85 °C with rated voltage applied
   2000 h at +125 °C with category voltage applied
   $\Delta C/C \leq 10$ % of initial value
   IL ≤ 1.25 initial limit
   DF ≤ initial limit
8. **Humidity Test:** 56 days at +40 °C, 90 % relative humidity
   $\Delta C/C \leq 8$ % of initial value
   IL ≤ initial limit
   DF ≤ initial limit
9. **Charge and Discharge Test:**
   1 million cycles at +85 °C,
   0.5 s charge at U_R
   0.5 s discharge
   Series resistance < 0.5 Ω
   $\Delta C/C \leq 5$ % of initial value
   IL ≤ initial limit
   DF ≤ initial limit
10. **Marking:**
    Top: Rating and polarity
    Front: Type, date code, Vishay identification

For technical questions, contact: tantalum@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

TAPE AND REEL PACKING (Case A and B - meets IEC 286-2)

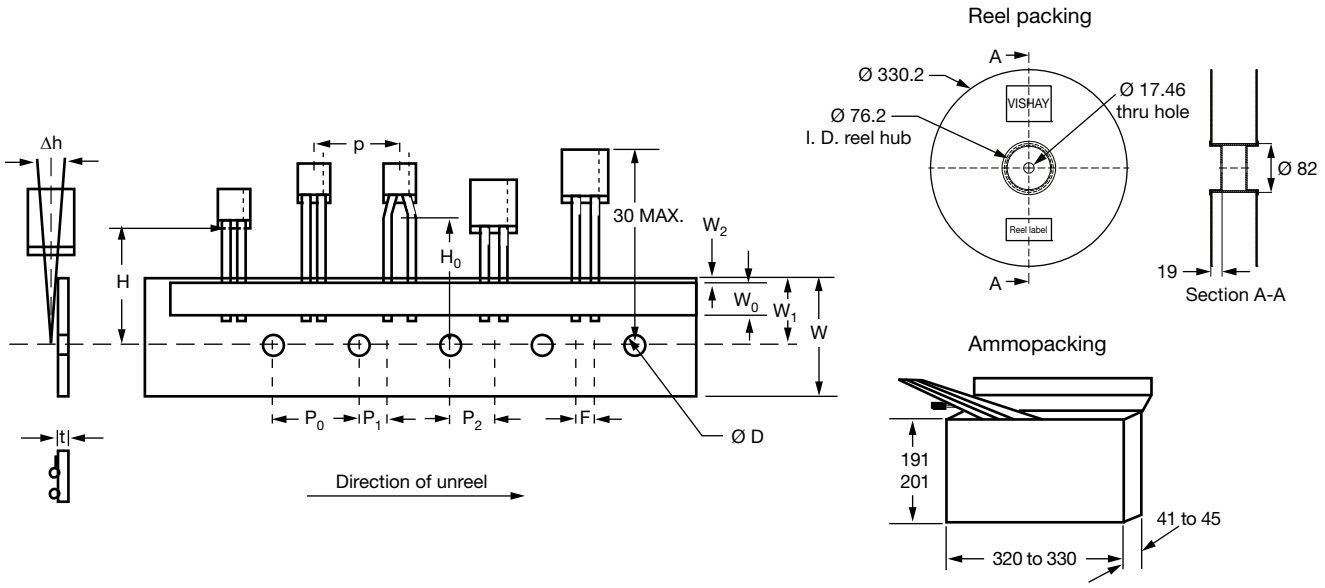


DESIGNATIONS	SYMBOL	DIMENSIONS (mm)		
Pitch of component	P	12.7 ± 1.0		
Feed hole pitch	P_0	12.7 ± 0.3		
Tape width	W	18 (+ 1/- 0.5)		
Hold down tape width	W_0	12		
Hole position	W_1	9 (+ 0.75/-0.5)		
Hold down tape position	W_2	0 (+ 3/-0)		
Feed hole diameter	D_0	4.0 ± 0.3		
Tape thickness	T	0.5 ± 0.2		
Component alignment	Δh	0 ± 2		
Lead clinch height	H_0	16.0 ± 0.5		
Hole center to component center	P_2	6.35 ± 1.3		
Lead wire spacing Feed hole center to wire center		**CASE A**	**CASE A**	**CASE B**
	F	2.5 + 0.6/- 0.1	5 + 0.6/- 0.1	5 + 0.6/- 0.1
	P_1	5.1 ± 0.7	3.85 ± 0.7	3.85 ± 0.7
Reel pack options	H = 16.5	X	Z	X
	H = 18.5	Y		Y
Ammopack options	H = 16.5	G	I	G
	H = 18.5	H		H

For technical questions, contact: tantalum@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

TAPE AND REEL PACKING (Case C and D)

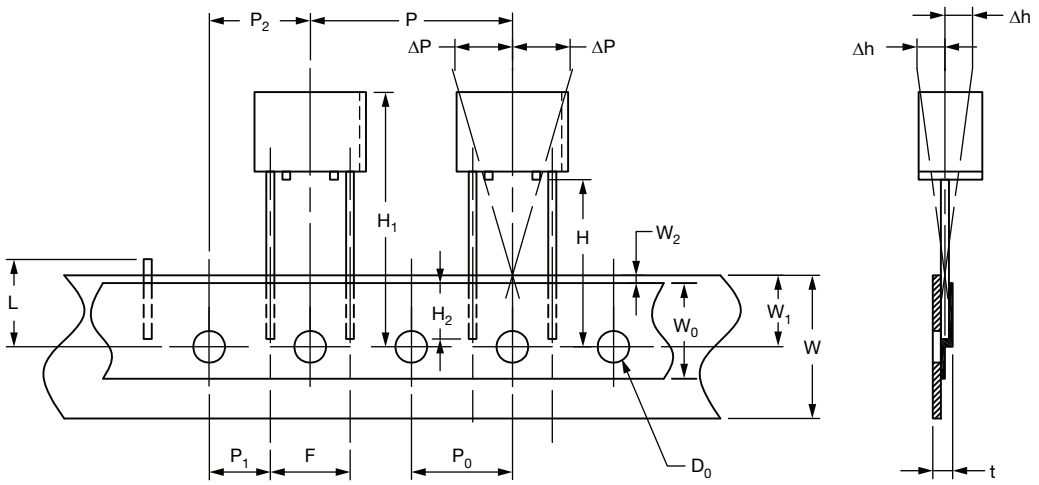

DESIGNATIONS	SYMBOL	DIMENSIONS (mm)	
Pitch of component	P	25.4 ± 1.0	
Feed hole pitch	P_0	12.7 ± 0.3	
Tape width	W	18.0 (+ 1/- 0.5)	
Hold down tape width	W_0	12	
Hole position	W_1	9.0 (+ 0.75/- 0.5)	
Hold down tape position	W_2	0 (+ 3/- 0)	
Maximum height of components	H_1	32 max.	
Tolerance of positioning parts sideways	ΔP	0 ± 1.0	
Feed hole diameter	D_0	4.0 ± 0.3	
Tape thickness	t	0.5 ± 0.2	
Component alignment	Δh	0 ± 2	
Cut out length	L	11 max.	
Lead wire spacing	F	10.16 + 0.6/- 0.1	
Feed hole center to wire center	P_1	7.62 ± 0.7	
Hole center to component center	P_2	12.7 ± 1.0	
Length of leads under adhesive tape	H_2	5.0 min. to 9.0 max.	
Reel pack options		CASE C	CASE D
	H = 16.5	X	X
	H = 18.5	Y	Y
Ammopack options	H = 16.5	G	G
	H = 18.5	H	H

PRODUCT INFORMATION	
Quick Reference Guide	www.vishay.com/doc?40037
Selector Guide	www.vishay.com/doc?49054
Parameter Comparison Guide	www.vishay.com/doc?40033
Mounting of Through-Hole Components	www.vishay.com/doc?40108
Frequently Asked Questions	www.vishay.com/doc?40110
Solid Tantalum Capacitors (With MnO_2 Electrolyte) Voltage Derating	www.vishay.com/doc?40246

For technical questions, contact: tantalum@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, “Vishay”), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

© 2025 VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000