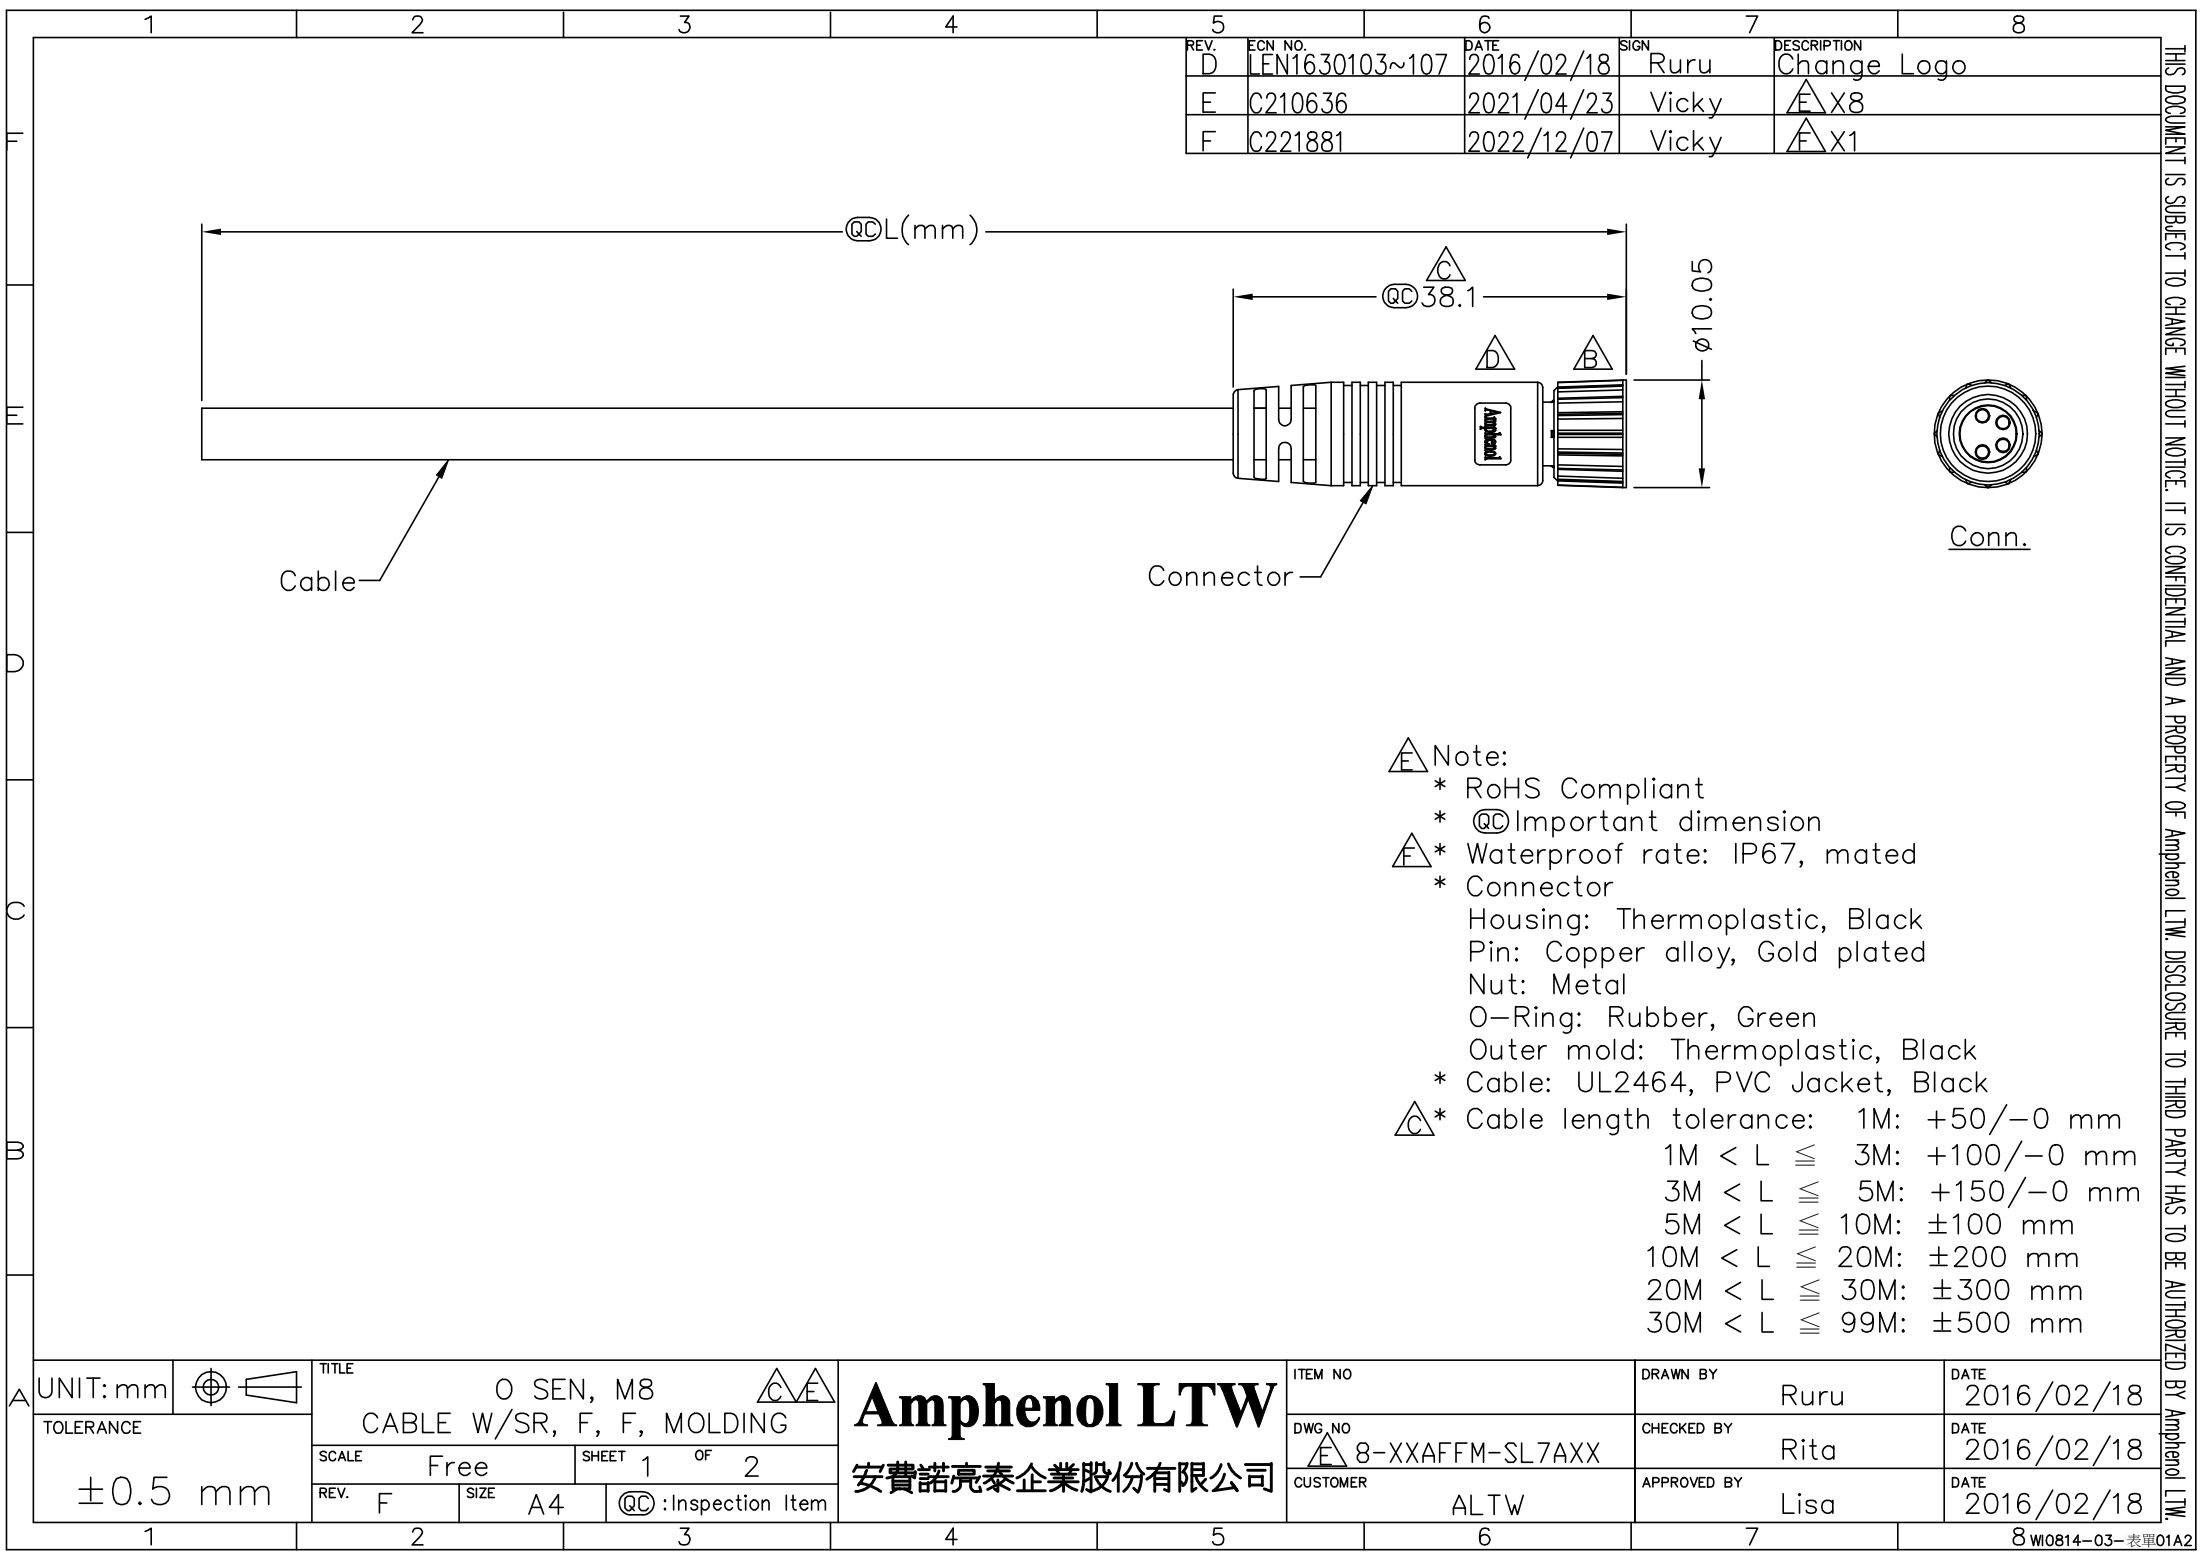




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	LEN1630103~107	2016/02/18	Ruru	Change Logo
E	C210636	2021/04/23	Vicky	△X8
F	C221881	2022/12/07	Vicky	△X1

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

- △ Note:
- * RoHS Compliant
 - * @C Important dimension
 - △ * Waterproof rate: IP67, mated
 - * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Nut: Metal
 - O-Ring: Rubber, Green
 - Outer mold: Thermoplastic, Black
 - * Cable: UL2464, PVC Jacket, Black
 - △ * Cable length tolerance: 1M: +50/-0 mm
 - 1M < L ≤ 3M: +100/-0 mm
 - 3M < L ≤ 5M: +150/-0 mm
 - 5M < L ≤ 10M: ±100 mm
 - 10M < L ≤ 20M: ±200 mm
 - 20M < L ≤ 30M: ±300 mm
 - 30M < L ≤ 99M: ±500 mm

UNIT:mm	O SEN, M8	
TOLERANCE	CABLE W/SR, F, F, MOLDING	
±0.5 mm	SCALE Free	SHEET 1 OF 2
REV. F	SIZE A4	@C :Inspection Item

ITEM NO		DRAWN BY Ruru	DATE 2016/02/18
DWG. NO 8-XXAFFM-SL7AXX		CHECKED BY Rita	DATE 2016/02/18
CUSTOMER ALTW		APPROVED BY Lisa	DATE 2016/02/18

Amphenol LTW
安費諾亮泰企業股份有限公司

XX: No. Of Pin—

XX: 01~99Meters

01:01Meter



02:02Meters

$$\vdots$$

•

99: 99Meters

Cable Length(L): 01~99Meters

Pin Out	4	Black	黑	4	Black	黑
	3	Blue	藍	3	Blue	藍
	2	White		2	White	
	1	Brown	棕	1	Brown	棕
	Pin #	Wire		Pin #	Wire	
Conn.						
	 3P			 4P		

Pin Assignments Front View

UNIT:mm		TITLE		
TOLERANCE		O SEN, M8 CABLE W/SR, F, F, MOLDING		
±0.5 mm		SCALE	Free	SHEET 2 OF 2
		REV.	F	SIZE A4
		QC : Inspection Item		

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG. NO	CHECKED BY	DATE
E 8-XXAFFM-SL7AXX	Rita	2016/02/18
CUSTOMER	APPROVED BY	DATE
ALTW	Lisa	2016/02/18