


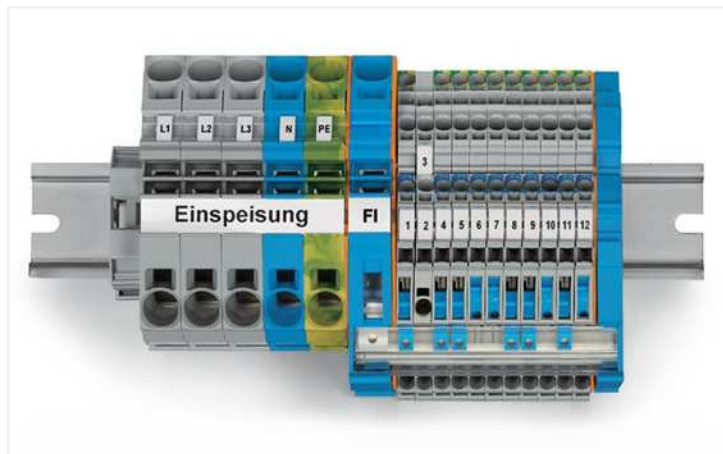

- Suitable for a sub-distribution board equipped with a residual current breaker (RCB); includes all required components for wiring supply terminal blocks, as well as connecting 9 AC circuits and 1 three-phase circuits.
- Distribution of ground fault potentials via one 10 x 3 mm N-busbar. Separation of N-potentials for insulation resistance measurement via N-disconnect slide links within the multilevel installation terminal block.

Contains:

- 10 x multilevel installation terminal block; NT/L/PE; 4 mm² (2003-7641)
- 1 x multilevel installation terminal block; L/L; 4 mm² (2003-7642)
- 1 x end and intermediate plate (2003-7692)
- 3 x 2-conductor supply terminal block for distribution boxes; gray; 16 mm² (2016-7601)
- 1 x 2-conductor supply terminal block for distribution boxes; blue; 16 mm² (2016-7604)
- 1 x 2-conductor ground terminal block; green-yellow; 16 mm² (2016-7607)
- 1 x end and intermediate plate (2016-7692)
- 1 x 1-conductor N-disconnect terminal block; blue; 16 mm² (2016-7714)
- 1 x end and intermediate plate (2016-7792)
- 1 x screwless end stop; 10 mm wide (249-117)
- 1 x busbar carrier; with end stop function (2009-305)
- 1 x busbar; tin-plated; 0.2 m (210-133)
- 1 x cover for busbar; transparent; 0.2 m (777-303)
- 1 x marking strip; white; 0.5 m (2009-110)
- 1 x WMB marker card; 1 ... 50 (793-5566)
- 1 x WMB marker card; L1, L2, L3, N, PE (793-5472)
- 1 x felt-tip pen (210-110)

Assembly width incl. end stop: 14.95 cm

Material Data

Note (material data)

[Information on material specifications can be found here](#)

Fire load	4.645 MJ
Weight	471.6 g

Commercial data

eCl@ss 10.0	27-14-11-25
eCl@ss 9.0	27-14-11-25
ETIM 8.0	EC001329
ETIM 7.0	EC001329
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	QU
GTIN	4045454229849
Customs tariff number	80808080888

