


DIMENSIONS

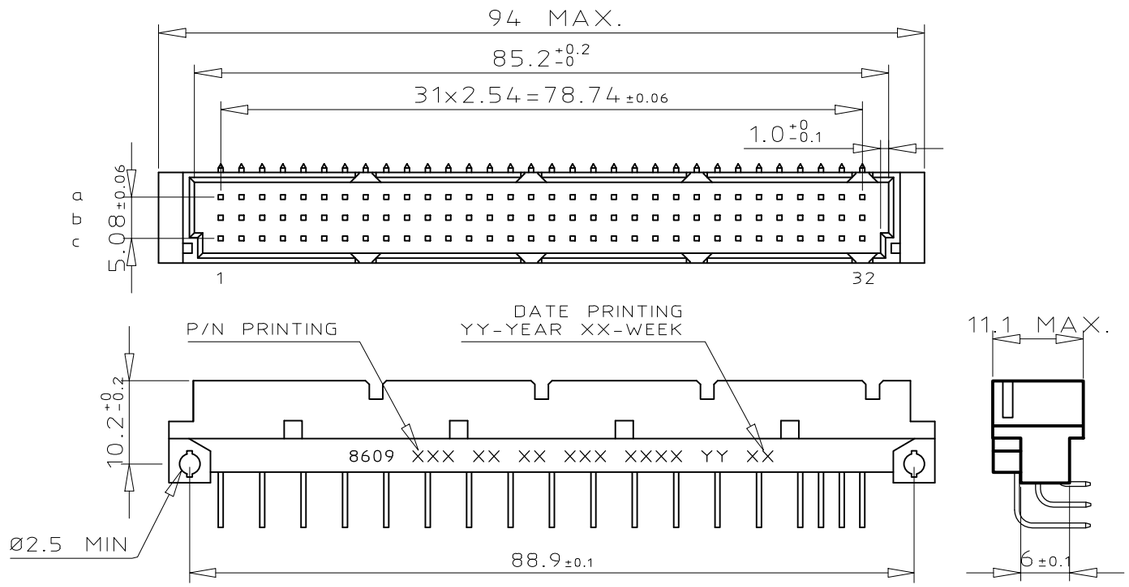


TERMINATION

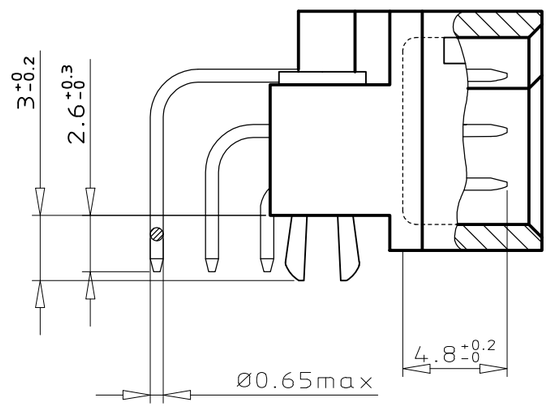

PCB LAYOUT

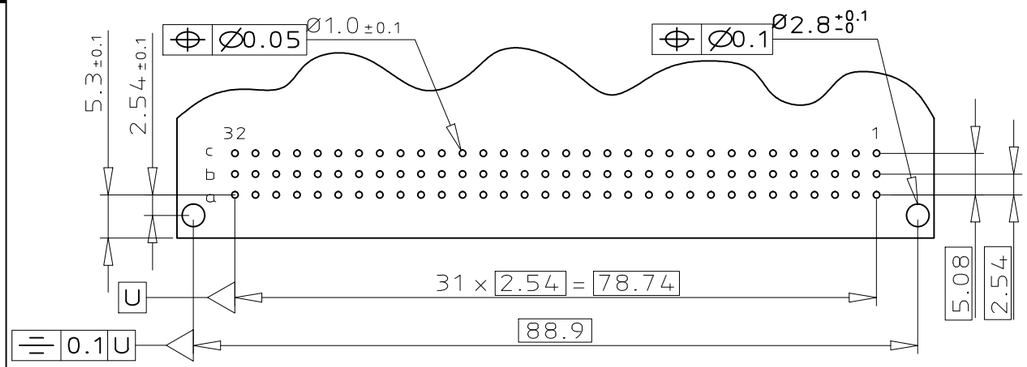

CONTACT ARRANGEMENT

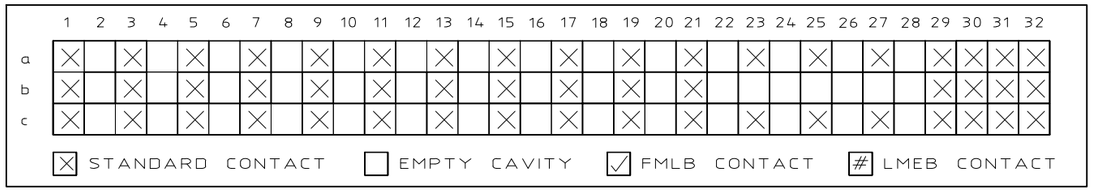

GENERAL CHARACTERISTICS & RoHS INFO

REFER DRAWING C-8609-0000A

ORDERING INFORMATION

SERIES 8609	3	51	7	1	13	7	5	0	TELF

ROWS FITTED WITH CONTACTS
ROW a b c . . . . . 3 — 51

NO. OF CONTACTS

TYPE OF INSULATOR
3 ROW MALE INSULATOR 7

METHOD OF MOUNTING
STANDARD MOUNTING - STYLE C 1

TERMINATION
ANGLED SPILL 13

OPTIONS
NO OPTION 7
WITH HARPOONS . . . . . H

PERFORMANCE CLASS
DIN 41612 CLASS 3 4
DIN 41612 CLASS 2 5
DIN 41612 CLASS 1 6
AS PER MIL C 55302 / JSS 50808 8

PITCH PER ROW
MIXED PITCH 0

LEAD FREE VERSION SPL CONTACTS LOADING . . . . . TELF

mat'l. code		surface	tolerance
SEE DRAWING C-8609-0000A		ISO 1302	ISO 406 ISO 1101
ltr	ecn no / dr / date	tolerances unless otherwise specified	
A	I09-0064 / KR / 2009-04-21	angles 0°±2°	linear 0.X ±0.3; 0.XX ±0.13; 0.XXX ±0.05
B	I11-0031 / MJA / 2011-02-11		
		dr KESAVAN R 2009-04-21	
		engr KESAVAN R 2009-04-21	
		chr S ALOSIUS 2011-02-11	
		appd BIJU K PAUL 2011-02-11	

projection | mm | scale 3:2

product family: 8609

title: DIN STANDARD HEADER
ANGLED SPILL DIN 41612 STYLE C

dwg no C-8609-2189 | sheet 1 of 1 | size A3

type Product Customer Drawing

sheet index | revision B | sheet 1

FCIconnect.com
Copyright FCI

form: A3

PDM: Rev:B STATUS: Released Printed: May 14, 2011