


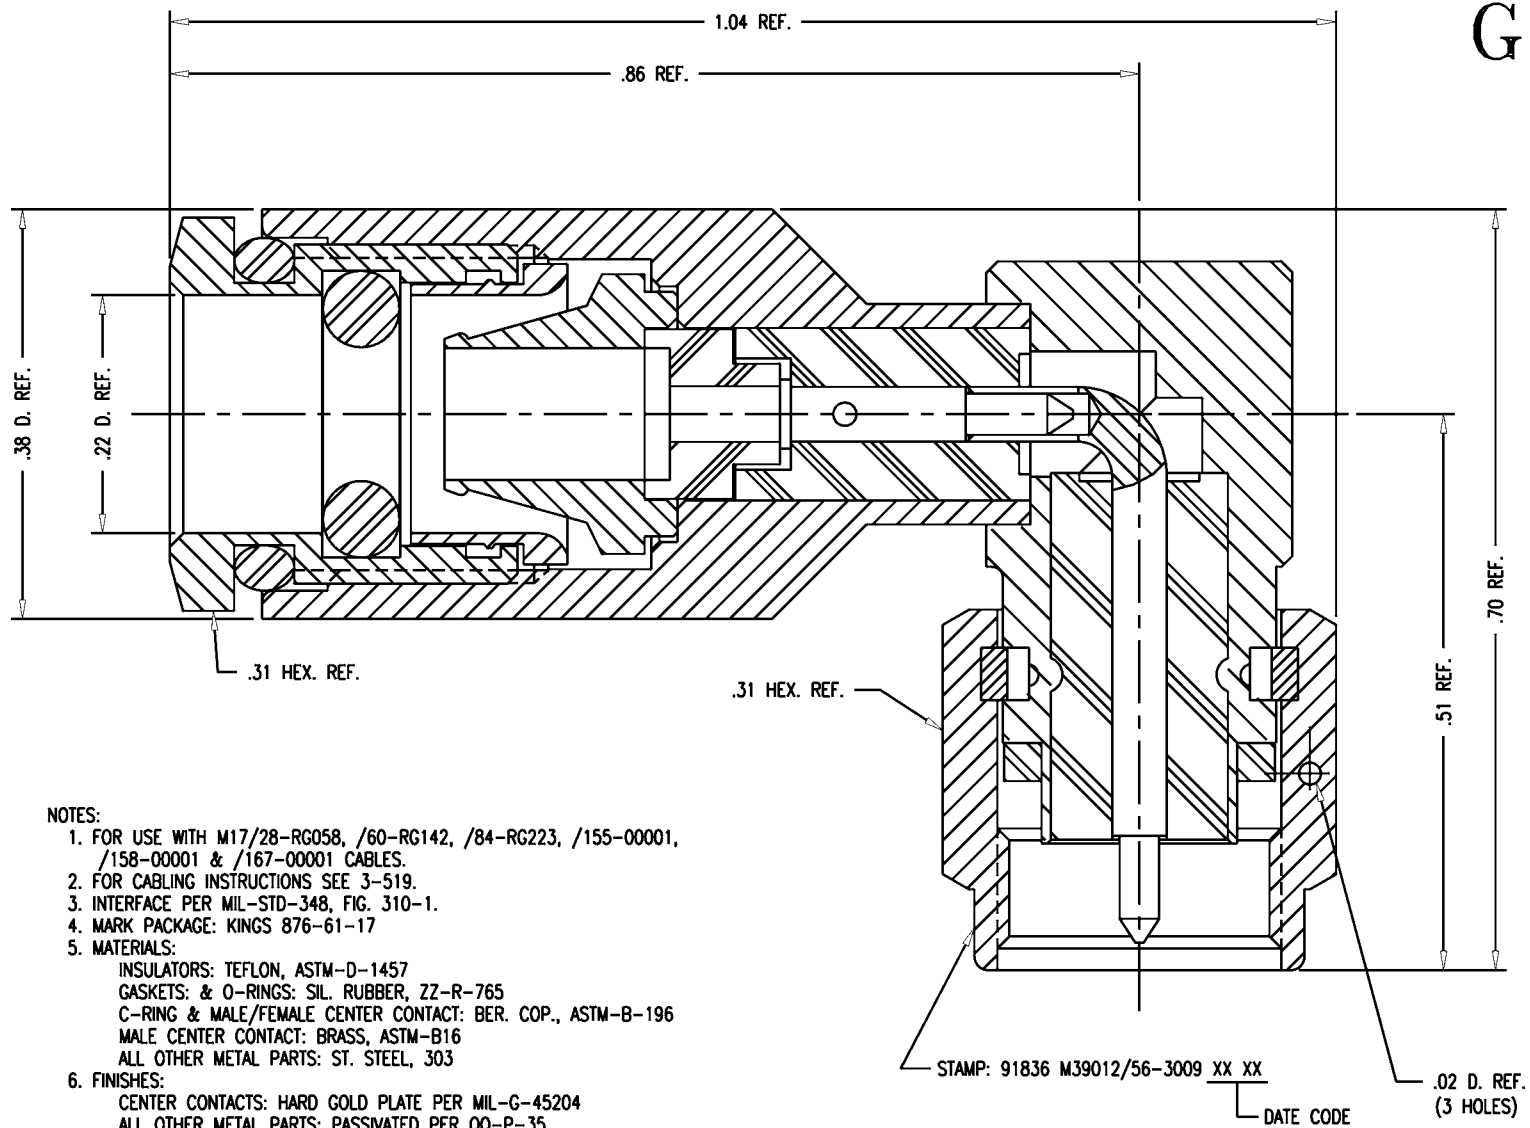

NOTES:

- FOR USE WITH M17/28-RG058, /60-RG142, /84-RG223, /155-00001, /158-00001 & /167-00001 CABLES.
- FOR CABLING INSTRUCTIONS SEE 3-519.
- INTERFACE PER MIL-STD-348, FIG. 310-1.
- MARK PACKAGE: KINGS 876-61-17
- MATERIALS:
INSULATORS: TEFLON, ASTM-D-1457
GASKETS: & O-RINGS: SIL. RUBBER, ZZ-R-765
C-RING & MALE/FEMALE CENTER CONTACT: BER. COP., ASTM-B-196
MALE CENTER CONTACT: BRASS, ASTM-B16
ALL OTHER METAL PARTS: ST. STEEL, 303
- FINISHES:
CENTER CONTACTS: HARD GOLD PLATE PER MIL-G-45204
ALL OTHER METAL PARTS: PASSIVATED PER QQ-P-35
- ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
VOLTAGE RATING: 335 VOLTS RMS
FREQUENCY RANGE: DC TO 12.4GHz

GSD

M39012/56-3009

REVISIONS

ISSUE	CHANGES
0	ER 34274 KH 11/20/92
1	CN 34662 C JCA 05/25/93
2	CN 35318 C KH 02/08/94

876-61-17

DET1134

SCALE 8:1

APPROX SURFACE AREA

WAS: E-17729

USED ON

REF:

PLUG, SMA, ANGLE,
W/P TAPER GRIP

DRAWN MJB	DATE 10/01/92
DESIGN GA	DATE 04/27/93
APPR.	DATE

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

M39012/56-3009

GSD