


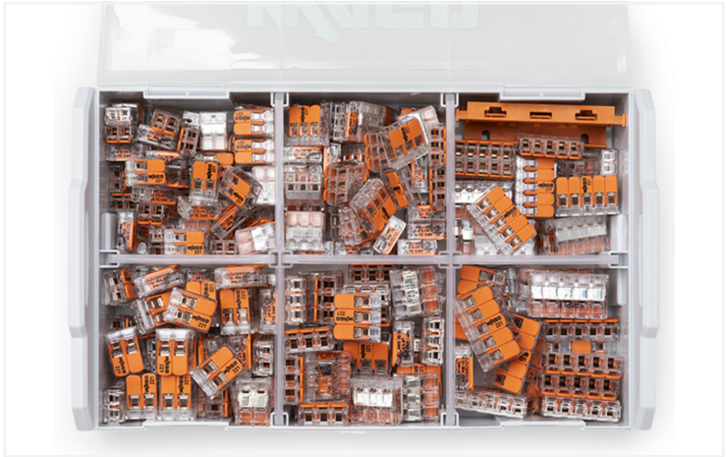

This item includes:

 Item No.: 221-412 Splicing connector with levers; for all conductor types; max. 4 mm²; 2-conductor; transparent housing; Surrounding air temperature: max 85°C (T85); 4,00 mm²; transparent	 Item No.: 221-413 Splicing connector with levers; for all conductor types; max. 4 mm²; 3-conductor; transparent housing; Surrounding air temperature: max 85°C (T85); 4,00 mm²; transparent	 Item No.: 221-415 Splicing connector with levers; for all conductor types; max. 4 mm²; 5-conductor; transparent housing; Surrounding air temperature: max 85°C (T85); 4,00 mm²; transparent	 Item No.: 221-500 Mounting carrier; 221 Series - 4 mm²; for DIN-35 rail mounting/screw mounting; orange	1
 Item No.: 221-612 Splicing connector with levers; for all conductor types; max. 6 mm²; 2-conductor; transparent housing; Surrounding air temperature: max 85°C (T85); 6,00 mm²; transparent	 Item No.: 221-613 Splicing connector with levers; for all conductor types; max. 6 mm²; 3-conductor; transparent housing; Surrounding air temperature: max 85°C (T85); 6,00 mm²; transparent	 Item No.: 221-615 Splicing connector with levers; for all conductor types; max. 6 mm²; 5-conductor; transparent housing; Surrounding air temperature: max 85°C (T85); 6,00 mm²; transparent		15

Notes

General safety information	NOTICE: Observe installation and safety instructions! • Only to be used by electricians! • Do not work under voltage/load! • Use only for proper use! • Observe national regulations/standards/guidelines! • Observe technical specifications for the products! • Observe the number of permissible potentials! • Do not use damaged/dirty components! • Observe conductor types, cross-sections and strip lengths! • Insert conductor until it hits the product's backstop! • Use original accessories! To be sold only with installation instructions!
----------------------------	--



Physical data		
Width		259 mm / 10.197 inches
Height		63 mm / 2.48 inches
Depth		155 mm / 6.102 inches

Material data		
Note (material data)		Information on material specifications can be found here
Fire load		16.844 MJ
Weight		1015.5 g

Commercial data		
PU (SPU)		1 pcs
Packaging type		Box
Country of origin		QU
GTIN		4055143739160
Customs tariff number		80808080888

Product Classification		
UNSPSC		39121409
eCl@ss 10.0		27-14-11-04
eCl@ss 9.0		27-14-11-04
ETIM 9.0		EC000446
ETIM 8.0		EC000446
ECCN		NO US CLASSIFICATION

Environmental Product Compliance		
RoHS Compliance Status		Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 887-957

↓