
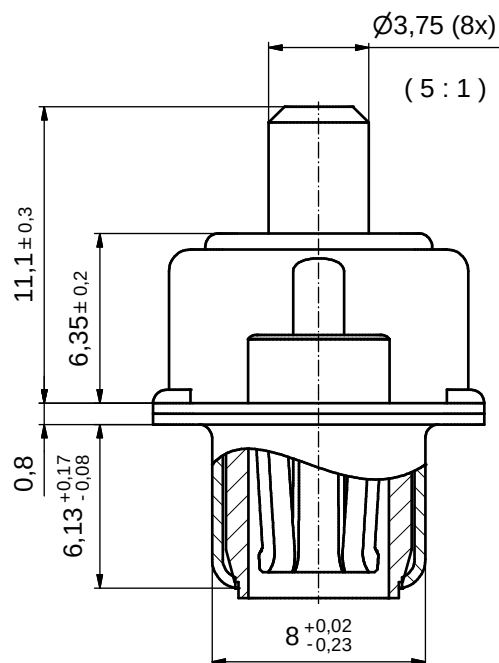
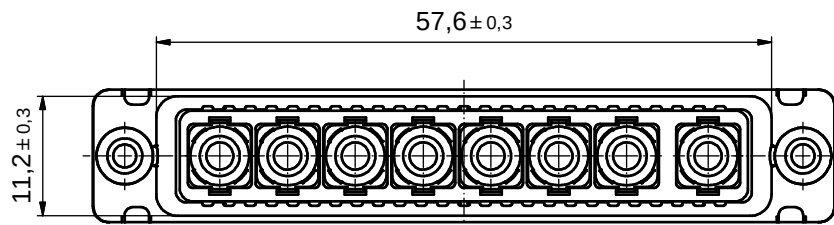
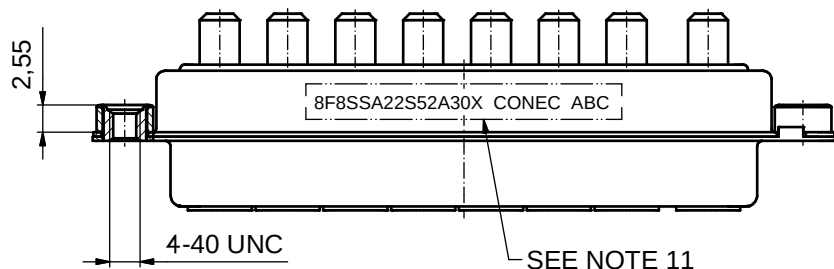
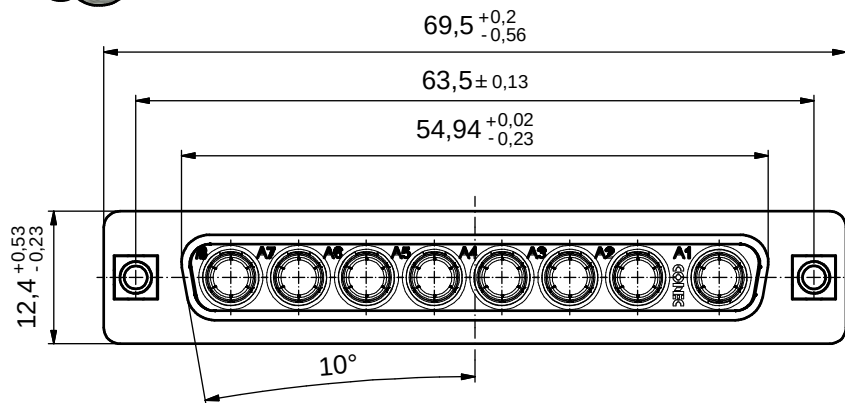


NOTES:

- FOR WAVESOLDERING (Solder bath Temperature 260° for 5 sec. and solder preheat 120°C for 120 sec.)
- METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
- INSULATOR: PBT GF UL 94 V-0, BLACK
- HIGH POWER CONTACTS 40A: COPPER ALLOY
PLATING, MATING AREA: GOLD FLASH over NICKEL
PLATING, TERMINATION SIDE: 160-240µin TIN over 80µin NICKEL
- THREADED INSERTS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
- COLLARS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
- CAPACITANCE: 47nF ± 20%
- DIELECTRIC WITHSTANDING VOLTAGE: 707 VDC
- MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
- P.C.B. HOLE DRILLINGS ON SHEET 2
- CONNECTOR IS PART MARKED: **8F8SSA22S52A30X CONEC ABC**

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH	DO NOT ALTER CAD DRAWING BY HAND				tolerance		 dim. in mm	scale: 2:1 (5:1)		
								material: SEE NOTES		
					date	name	title: C- FILTER COMB. FEMALE 8W8SS SOLDER PIN STRAIGHT with threaded insert			
					drawn 02.09.2014	Heinrich				
					appd. 02.09.2014	Lehmenkühler				
					norm					
					d-old					
								dwg no: 24K1A1545		DIN-A3 sh: 1/2
	a	Original								
	rev.	description	date	name				part no: 8F8SSA22S52A30X		

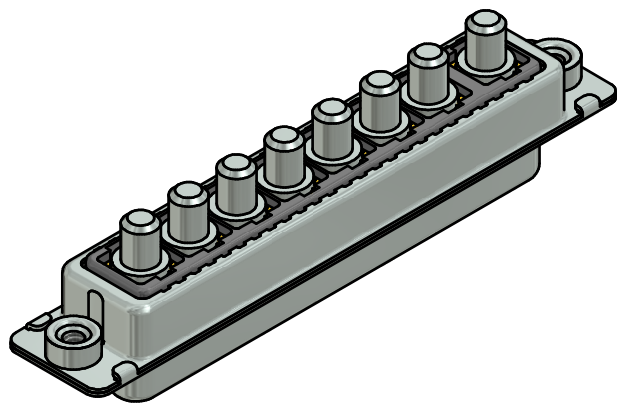