




Connectors > Contacts > Connector Contacts

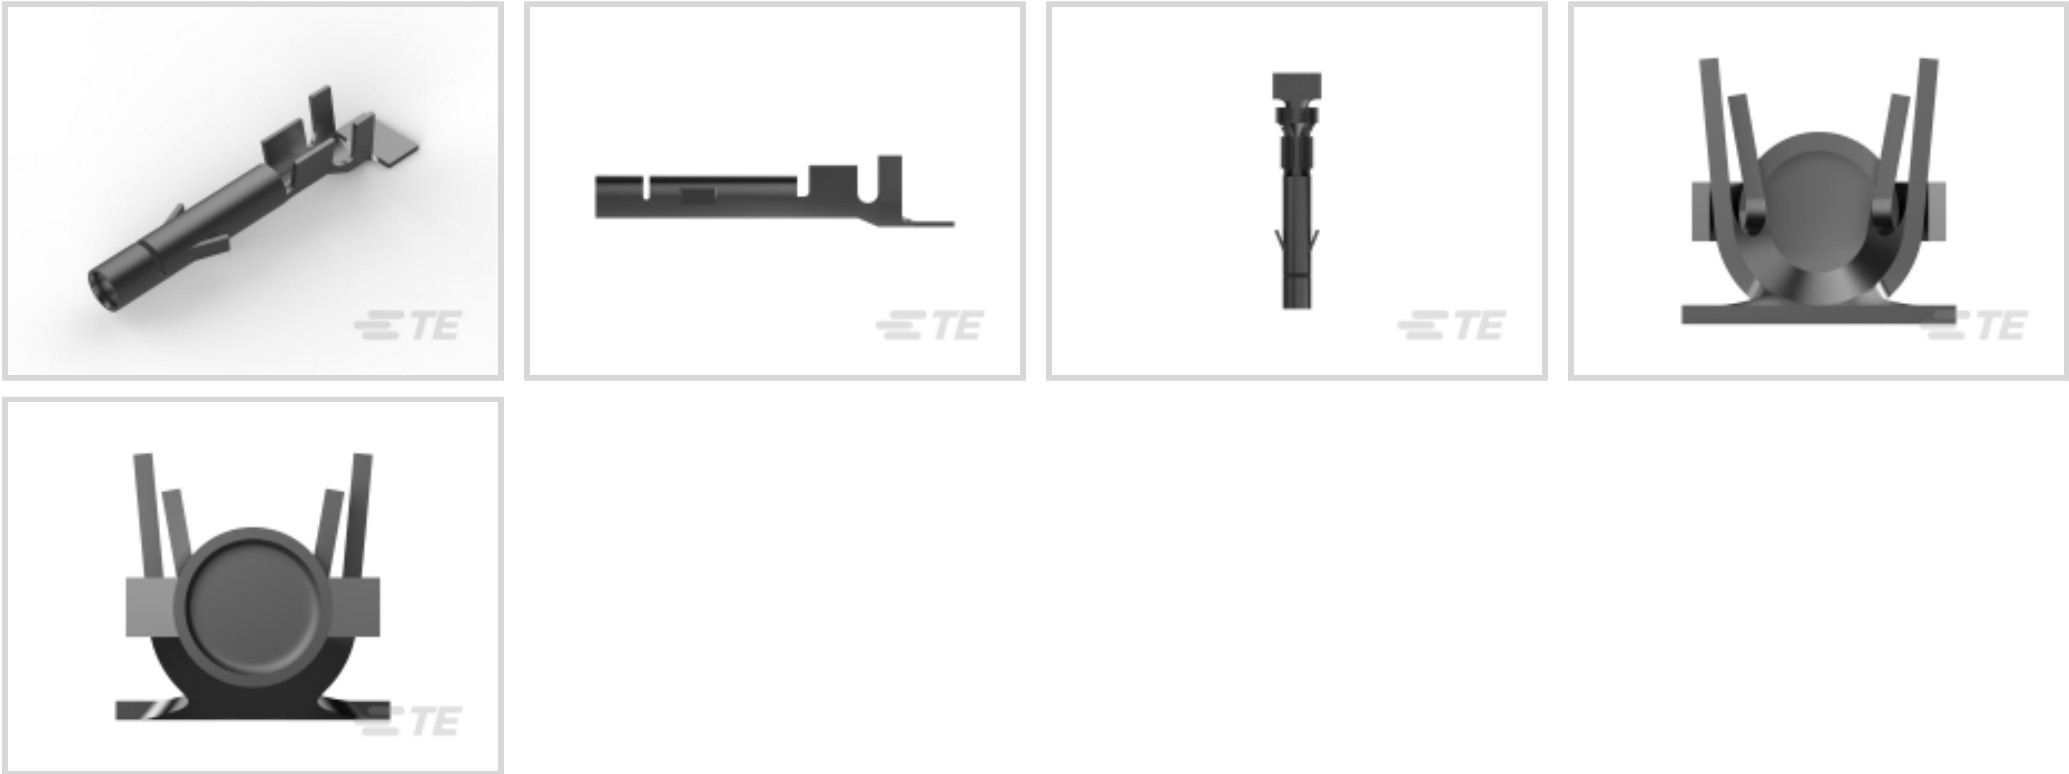

Contact Type: **Socket**
Contact Mating Area Plating Material: **Tin (Sn)**
Wire Contact Termination Area Plating Material: **Tin**
Operating Voltage: **600 VAC**
Contact Retention Within Housing: **With**

Features

Product Type Features

Discrete Wire Type	Stranded
--------------------	----------

Electrical Characteristics

Operating Voltage	600 VAC
-------------------	---------

Contact Features

Contact Shape & Form	Split
Contact Type	Socket
Contact Mating Area Plating Material	Tin (Sn)
Wire Contact Termination Area Plating Material	Tin
Contact Retention Within Housing	With
Contact Base Material	Phosphor Bronze
Contact Current Rating (Max)	19 A
Mating Pin Diameter	2.06 mm[.081 in]
Wire Contact Termination Area Plating Material Finish	Matte
Contact Orientation	Straight



Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Mechanical Attachment

Contact Retention Type Within Housing	Locking Lance
Wire Insulation Support	Without

Dimensions

Wire Size	.5 – 2.1 mm ²
Compatible Insulation Diameter Range	3.3 mm[.13 in]

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Compatible With Agency/Standards Products	CSA, UL, VDE
---	--------------

Packaging Features

Packaging Quantity	1000
Packaging Method	Box

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 1-2294562-1 UMNL TWIST-N-LOK, 5POS, CAP HOUSING	TE Part # 1-794761-9 09P UMNL CAP HSG,P/MT,V0,BLACK	TE Part # 1-794762-9 12P UMNL CAP HSG,PAN MNT,BLACK	TE Part # 1-794762-4 12P UMNL CAP HSG,PAN MNT,YELLOW
TE Part # 1-480704-4 06P UMNL PLUG HSG YELL	TE Part # 1-480705-4 06P UMNL CAP HSG YELL	TE Part # 1-480705-9 06P UMNL CAP HSG BLK	TE Part # 1-480701-8 03P UMNL CAP HSG GRY
TE Part # 1-480700-2 03P UMNL PLUG HSG RED	TE Part # 1-350777-9 02P UMNL V0 PLUG HSG BLACK	TE Part # 1-480702-0 04P UMNL PLUG HSG NATL	TE Part # 1-350783-9 12P UMNL V0 CAP HSG BLACK
TE Part # 1-480699-1 02P UMNL CAP HSG BRN	TE Part # 1-794761-6 09P UMNL CAP HSG,P/MT,V0,BLUE	TE Part # 350777-4 02P UMNL PLUG HSG UL94V0	TE Part # 58637-2 PRO-CRIMP DIE 20-14 UMNL



TE Part # 58637-1
PRO-CRIMP TL & DIE 20-14 UMNL

TE Part # 480763-9
05P UMNL PLUG HSG BLK

TE Part # 2031973-1
SDE UMNL 1.0-3.3mm2 ASSY

TE Part # 350777-1
02P UMNL PLUG HSG

Also in the Series | Universal MATE-N-LOK

Circular Power Connectors(2)

Connector Caps & Covers(34)

Connector Seals & Cavity Plugs(27)

Connector Strain Relief(7)

Insertion & Extraction Tools(4)

PCB Headers & Receptacles(285)

Rectangular Power Connectors(642)

Standard Circular Connectors(1)

Wire-to-Board Headers & Receptacles
(285)

Customers Also Bought

TE Part #3521964001
RNF-100-1/2-X-FSP

TE Part #140716-2
110 FASTON,REC.,24-22 AWG,PTBR

TE Part #172520-3
LOW PRO MINI AMP-IN HDR 3P

TE Part #8-1419111-6
PT570512



Documents

Product Drawings
UNIV.M-N-L.SOCKET

English

CAD Files
Customer View Model
ENG_CVM_CVM_926893-3_K.2d_dxf.zip

English

3D PDF

3D

Customer View Model
ENG_CVM_CVM_926893-3_K.3d_igs.zip

English

Customer View Model
ENG_CVM_CVM_926893-3_K.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications
Application Specification

English

Agency Approvals
VDE Certificate

English

VDE Certificate

English

926893-3

Tin (Sn), Socket Contact, 20 – 14 AWG, 600 VAC, .5 – 2.1 mm² Wire, Locking Lance
Contact Retention, Crimp, Phosphor Bronze, Universal MATE-N-LOK

