926933-1 ✔ ACTIVE

TE Internal #: 926933-1

Pin Terminal, 1.6 mm [.063 in] Pin Diameter, 18 – 17 AWG, .82 – 1 mm² Wire, 1624 – 2048 CMA, 6 mm [.24 in] Length, Open Barrel, Pre-Tin Plating, Reel

View on TE.com >

Terminals & Splices > Crimp Wire Pins, Tabs & Ferrules







Crimp Wire Terminal Type: **Pin Terminal**

Mating Pin Diameter: **1.6 mm [.063 in]**

Wire Size: **1624 – 2048 CMA**

Features

Product Type Features

Compatible With Discrete Wire Type	Stranded

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire

Contact Features

Crimp Wire Terminal Type	Pin Terminal
Mating Pin Diameter	1.6 mm[.063 in]
Barrel Type	Open
Terminal Plating Material	Pre-Tin
Terminal Orientation	Straight

Mechanical Attachment

Wire Insulation Support	Without

Dimensions

Wire Size	1624 – 2048 CMA
Barrel Inside Diameter	.4 mm[.016 in]
Terminal Material Thickness	.25 mm[.01 in]
Overall Product Length	6 mm[.24 in]

Usage Conditions

Insulation Option	Uninsulated

Packaging Features

Packaging Quantity	30000
Packaging Method	Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts



TE Part # 2150150-2
OCEAN_2.0_Applicator-E-062O062O-SEA

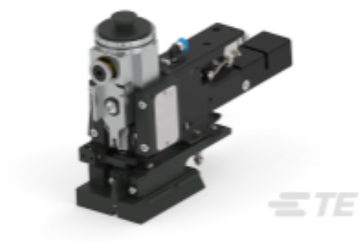


TE Part # 2150150-1
OCEAN_2.0_Applicator-E-062O062O-SEM

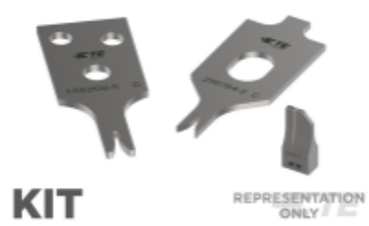

TE Part # 7-2150150-7
OCEAN_2.0_SPARE_PART_KIT-062O062O


Customers Also Bought

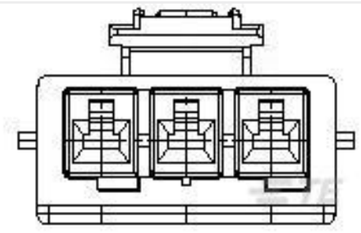


TE Part #368571-1
PDL 3P PLUG 3.96(GWT) NAT




TE Part #368572-1
PDL 3P CAP 3.96 F/H(GWT) NAT

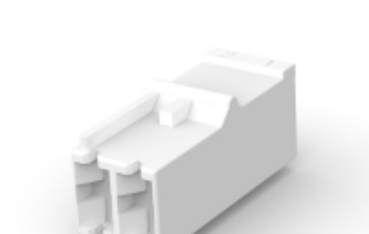

TE Part #964768-3
STD-TIM HSG SPECIAL 2P (NATURE)

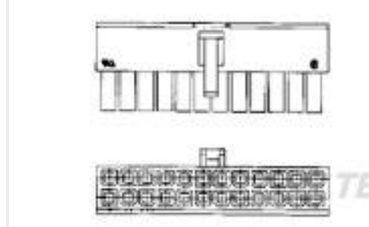

TE Part #1-1586019-2
12P RCPT VAL-U-LOK V0

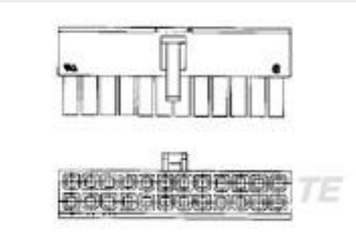


TE Part #1586765-8
8P RCPT VAL-U-LOK GW



TE Part #1-1676966-9
SMW2 R56 5%



TE Part #8-1879511-8
CRGH0805 1% 100K 0.33W

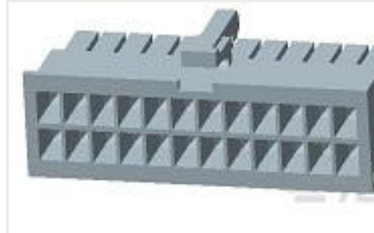

TE Part #1-1969597-2
12P RCPT VAL-U-LOK V2



TE Part #2301997-5
RJ45 JACK INT.MAG. 10/100 LED 2X1



TE Part #1478768-3
ANTI-VIB NYLON GLD 20MM GREY

Documents

Product Drawings

WIRE PIN 18-17 AWG .01 PTPB

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_926933-1_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_926933-1_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_926933-1_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.