

6

5

4

3

2


1

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/13/08	

APPROVED: _____


DATE: _____ TITLE: _____

D

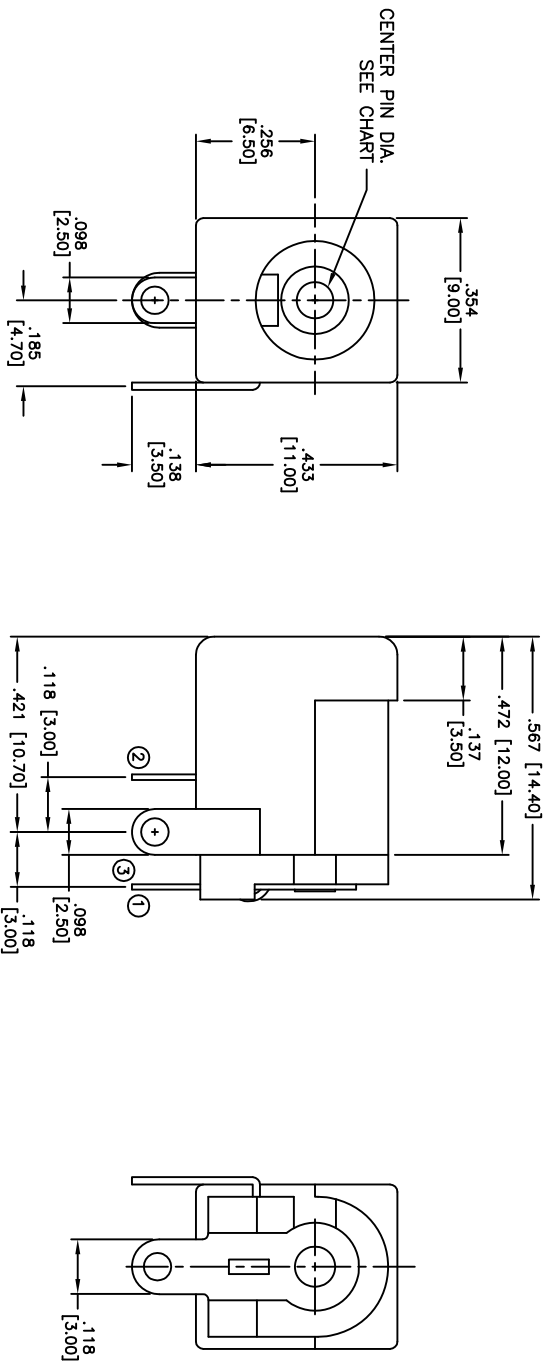

C

PART NO.	CENTER PIN DIA.
ADC-H-002-1-HT	.079 [2.00]
ADC-H-002-2-HT	.098 [2.50]

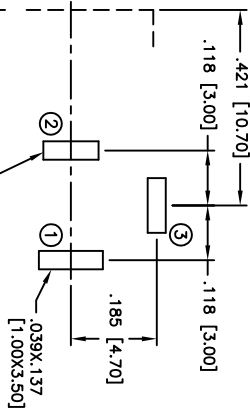

B

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Tehmoplastic, rated UL 94V-0

Insulator color: Black

Center Pin: Brass, Nickel plated

Contacts: Copper Alloy, Silver plated

Plating:

Silver over Nickel underplate

Electrical:

Operating voltage: 16 VDC max.

Current rating: 5 Amp max.

Contact resistance: 30 mohms max. initial

Insulation resistance: 50 Mohms min.

Dielectric withstanding voltage: 500 VAC for 1 minute


Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant

A



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES		TITLE	
.X ± .10	ØXX ± .10	DC POWER JACK, RIGHT ANGLE, PCB HI CURRENT, HI-TEMP INSULATOR	
.XX ± .020	ØXXX ± .015		
.XXX ± .015	ØXXX ± .010		
APPROVALS		DATE	
DRAWN		SS	
CHECKED			
APPROVED			
SIZE		PART NO.	
X		ADC-H-002-X-HT	
REV.		-	
REF:		SCALE: NTS	
SHEET 1 OF 1			

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

6

5

4

3

2

1