



Heat Shrink Tubing > ATUM 4:1 Heat Shrink Tubing



Tubing Product Type: **Heat Shrink Tubing**

Primary Product Color: **Black**

Wall Type: **Dual Wall**

Expanded Inside Diameter (Min): **16 mm [.63 in]**

Recovered Inside Diameter (Max): **4 mm [.157 in]**

[All ATUM 4:1 Heat Shrink Tubing \(85\)](#)

Features

Product Type Features

Tubing Product Type	Heat Shrink Tubing
Wall Type	Dual Wall

Electrical Characteristics

Operating Voltage (Max)	.6 kV
-------------------------	-------

Body Features

Fluid Type	Aviation Fuel, Chemicals/Solvents, De-Icing Fluid, Diesel Fuel, Hydraulic Fluid, Lubricating Oil
Primary Product Color	Black
Shrink Ratio	4:1
Primary Product Material	Irradiated Modified Polyolefin
Flexibility	Semi-Flexible

Dimensions



Recovered Wall Thickness (Nominal)	1.78 mm[.07 in]
Product Length	1220 mm[48.031 in]
Recovered Wall Thickness (Tolerance)	.38 mm[.015 in]
Expanded Inside Diameter (Min)	16 mm[.63 in]
Recovered Inside Diameter (Max)	4 mm[.157 in]
Tubing Size Range	4 – 19 mm[.157 – .748 in]

Usage Conditions

Shrink Temperature (Min)	80 °C
Tubing Flammability Type	Flame-Retardant
Operating Temperature Range	-55 – 110 °C[-67 – 230 °F]
Recovery Temperature	110 °C

Operation/Application

Mechanical Resistance	Mechanical Damage
-----------------------	-------------------

Product Availability

Applicable Region	Global
-------------------	--------

Packaging Features

Packaging Method	Bag & Box
------------------	-----------

Other

Meets Low Outgassing Requirements	No
Product Source	Czech Republic

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) SVHC > Threshold: DBMC (5% in 16982002840) Article Safe Usage Statements: Wash thoroughly after handling. Do not handle until all safety precautions have been read and understood. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.



Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # EG1114-000
CV1981-ST-230V1600W-EU

Also in the Series | RAYCHEM ATUM



Dual Wall Tubing(220)

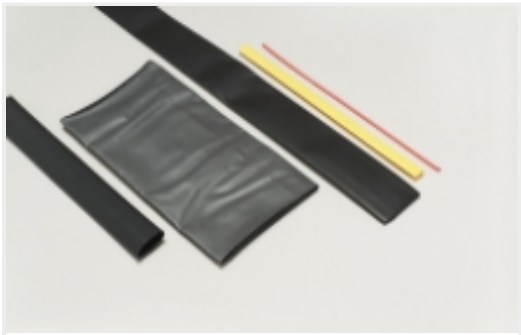

Heat Shrink Tubing(220)



Orange Heat Shrink Tubing(1)

Customers Also Bought

ATUM-16/4-0-STK

Heat Shrink Tubing, Black, 4:1, Dual Wall, Shrinks To 4 mm [.157 in], Irradiated Modified Polyolefin, 16 mm [.63 in] Expanded Inside, RAYCHEM ATUM



TE Part #2525596019
RBK-ILS-125-NR1-0-23MM



TE Part #CP4928-000
ES2000-NO.3-B8-0-STK-SH



TE Part #1SNK506021R0000
ZS6-3S-BL




TE Part #5672696010
TSAS-NR502-X-10MM




TE Part #CAT-HST-ATUM1
ATUM 4:1 Heat Shrink Tubing




TE Part #2150043-1
OCEAN_2.0_Applicator-E-062F070O-REM

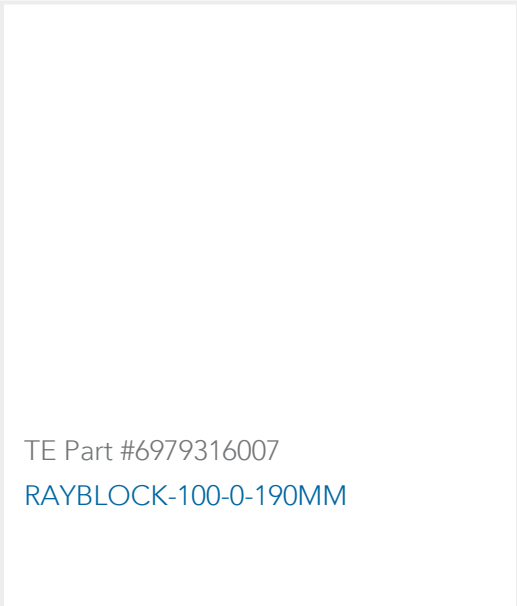

TE Part #6979316007
RAYBLOCK-100-0-190MM

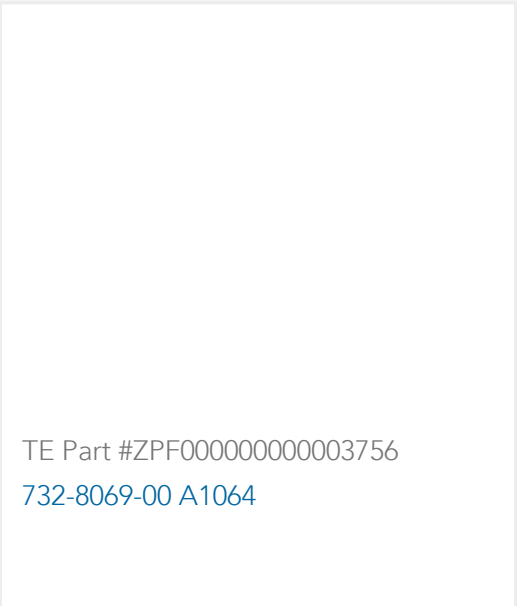

TE Part #ZPF000000000003756
732-8069-00 A1064

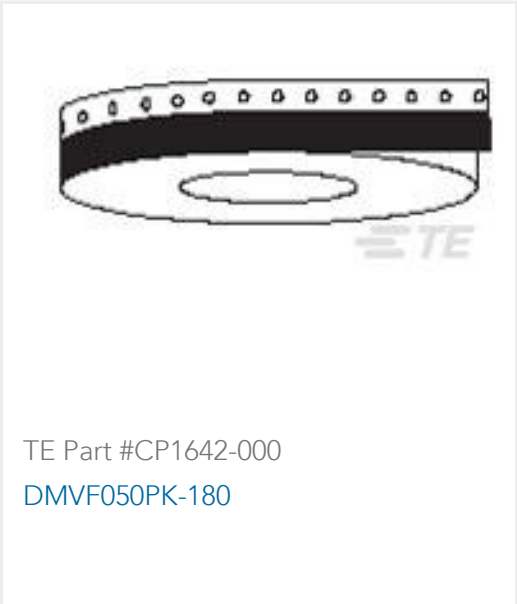

TE Part #CP1642-000
DMVF050PK-180

Documents

Product Drawings

ATUM-16/4-0-STK

English

Datasheets & Catalog Pages

ATUM Tubing

English

Product Specifications

Quality Specification

English