


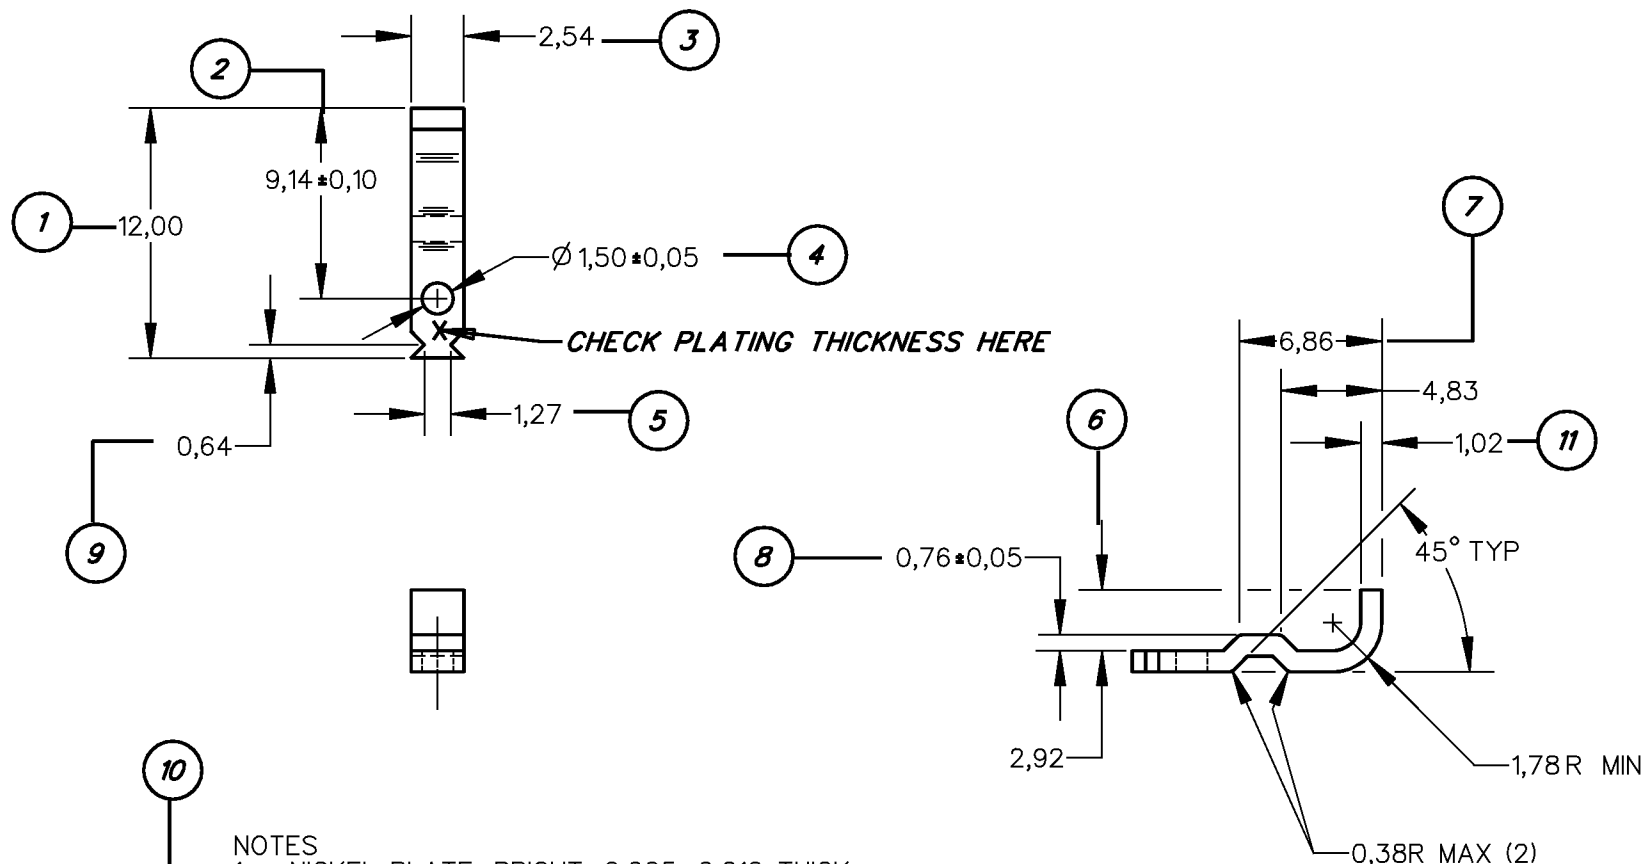

NOTES

- 1 - NICKEL PLATE, BRIGHT, 0.005-0.010 THICK
2 - MATERIAL TEMPER: ANNEALED

UNLESS OTHERWISE
SPECIFIED TOLERANCES
ARE:

	US (inch)	METRIC
NO PLACE	(X) ±.040	±1
ONE PLACE	(.X) ±.030	±0.4
TWO PLACE	(.XX) ±.015	±0.15
THREE PLACE	(.XXX) ±.005	±
ANGLES	±	±
RAW MATERIAL—COMMERCIAL STANDARD		

MICRO SWITCH STANDARDS APPLY

DIMENSIONS ARE TO BE
MET BEFORE PROTECTIVE
COATINGS ARE APPLIED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY
OF HONEYWELL'S MICRO SWITCH DIVISION. THIS DRAWING IS NOT
TO BE COPIED OR USED WITHOUT THE APPROVAL OF HONEYWELL.

A	REV INSP, NOTE & MAT'L	90010	J A K	JUN 96
REV LET	REVISION	REVISION NOTICE	CHANGED BY	CHECKED BY

TITLE POLE PIECE

REPLACES
SKETCH07497ARELEASING DOCUMENT
DR-4200

MATERIAL—PLAIN CARBON AND ALUMINUM KILLED COLD ROLLED STEEL / 09-54489

CAD	DRAWN	J A K	17 JUN 96
DDM	D'FT'G CHECK		
	DESIGN CHECK		

Honeywell
MICRO SWITCH

THIRD ANGLE PROJECTION
DO NOT SCALE PRINT

SCALE 3 : 1
ISSUE 7

DRAWING NUMBER
AV-10379