



Wire Protection & Management > Interconnect Devices > SolderSleeve Shield Terminators



Operating Temperature (Max): 125 °C [257 °F]
Expanded Inside Diameter (Min): 17.02 mm [.67 in]
Recovered Inside Diameter (Max): 10.03 mm [.395 in]
Pre-Installed Lead: No
Resistance Properties: **Splash Protection**

Features

Product Type Features

Interconnect Device Splice Type	SolderSleeve
---------------------------------	--------------

Configuration Features

Pre-Installed Lead	No
--------------------	----

Dimensions

Product Length	27 mm[1.063 in]
Expanded Inside Diameter (Min)	17.02 mm[.67 in]
Recovered Inside Diameter (Max)	10.03 mm[.395 in]

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Resistance Properties	Splash Protection
Wire Temperature (Max)	85 °C

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	



Current ECHA Candidate List: JUNE 2025 (250)
Candidate List Declared Against: JAN 2025 (247)
SVHC > Threshold:
Cd (18% in Solder)
Pb (32% in Solder)

Article Safe Usage Statements:
Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
-----------------	--

Solder Process Capability	Not applicable for solder process capability
---------------------------	--

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # EG8162-000
[HL1920E-230V-EURO](#)


Customers Also Bought



TE Part #585569-000
[TXR40AB90-1612BI](#)



TE Part #CAT-R21-73106549
[Bulbous Heat Shrink Boots: Lipped, Right Angle](#)

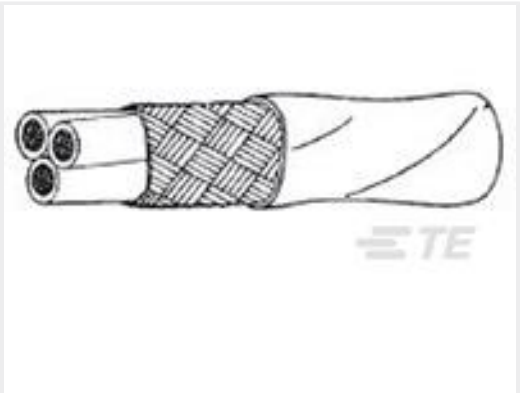

TE Part #316323-000
[55A1131-22-0/2/9-9](#)



TE Part #696453-000
[B-053-70](#)






TE Part #1841-1-5616
CONT PIN



TE Part #696206-000
B-202-53

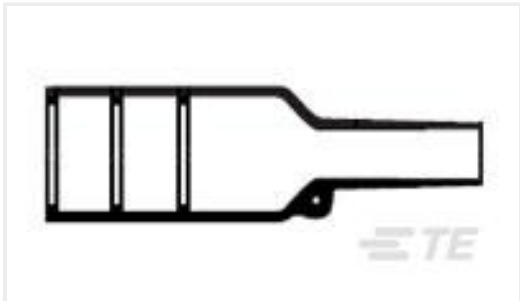

TE Part #631516-000
202K121-100/180-0

TE Part #CTJ722E01C-6144
MODULE ASSY

TE Part #YCTL-20C0150000000
JUNCTION ASSY

Documents

Product Drawings

B-051-00-01

English

Product Specifications

Product Specification

English