



Wire Protection & Management > Interconnect Devices > SolderSleeve Shield Terminators



Operating Temperature (Max): 125 °C [257 °F]
Expanded Inside Diameter (Min): 22.99 mm [.905 in]
Recovered Inside Diameter (Max): 12.7 mm [.5 in]
Pre-Installed Lead: No
Resistance Properties: **Splash Protection**

Features

Product Type Features

Interconnect Device Splice Type	SolderSleeve
---------------------------------	--------------

Configuration Features

Pre-Installed Lead	No
--------------------	----

Dimensions

Product Length	27.51 mm[1.083 in]
Expanded Inside Diameter (Min)	22.99 mm[.905 in]
Recovered Inside Diameter (Max)	12.7 mm[.5 in]

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Resistance Properties	Splash Protection
Wire Temperature (Max)	85 °C

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量超出标准 Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	



Current ECHA Candidate List: JUNE 2025 (250)
Candidate List Declared Against: JUNE 2025 (250)
SVHC > Threshold:
Cd (18% in Component Part)
Pb (32% in Component Part)

Article Safe Usage Statements:
Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
-----------------	--

Solder Process Capability	Not applicable for solder process capability
---------------------------	--

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # EG8162-000
HL1920E-230V-EURO

Customers Also Bought


TE Part #1841-1-5616
CONT PIN

TE Part #119468-000
D-602-0141

TE Part #316323-000
55A1131-22-0/2/9-9

TE Part #383059-000
44A0131-22-0/2/9




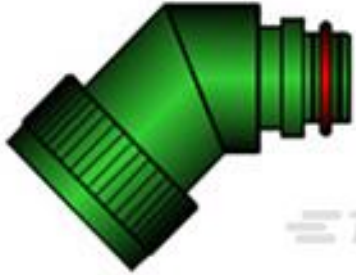


TE Part #366713-000
[TXR40AB45-1607AI](#)



TE Part #2155384003
[ZHTM-12/6-0-SP](#)

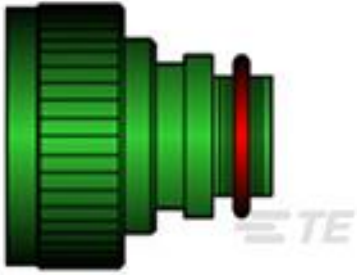


TE Part #812043-000
[TXR40AB00-1810BI](#)

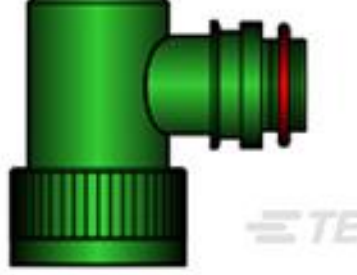

TE Part #585569-000
[TXR40AB90-1612BI](#)



TE Part #710031-4
[XCT 10-6](#)

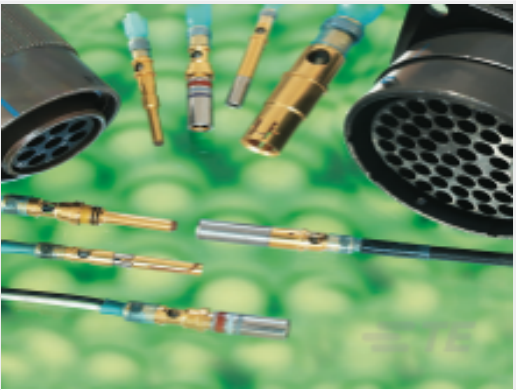

TE Part #664725-000
[D-602-0144CS1193](#)

Documents

Product Drawings

[B-051-01-01](#)

English

Product Specifications

[Product Specification](#)

English