



DATE	REV	ECN	APP'D. BY
12/22/20	A0	RELEASED	ADB
-	-	-	-

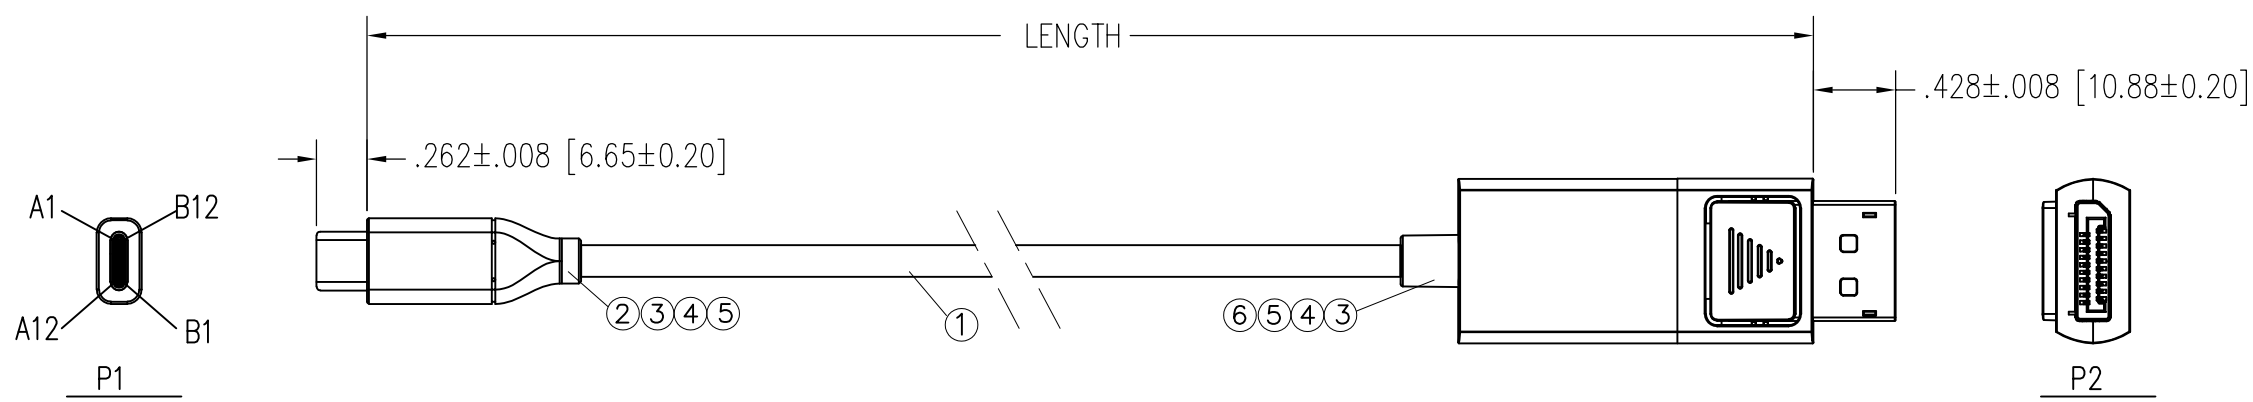


PIN ASSIGNMENT

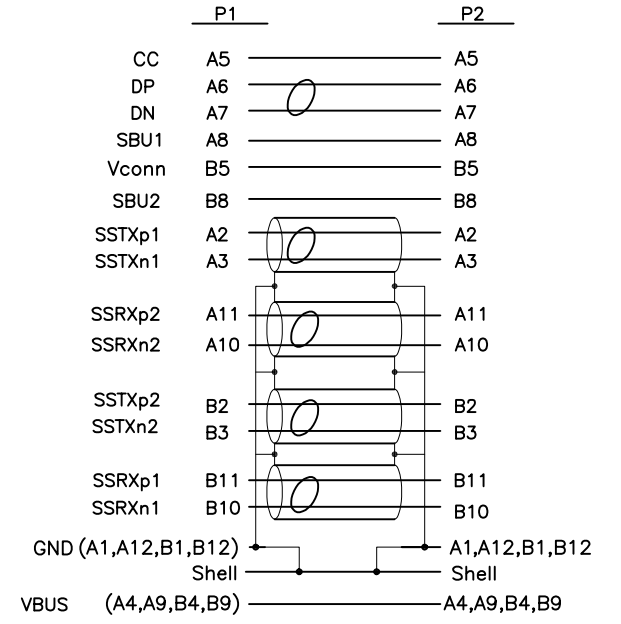

- Notes:
- Cable:
 - USB 3.1 [34AWG(7/0.06TC)+EAM]*4P+32AWG(7/0.08TC)*2C+26AWG (7/0.16TC)*2C+32AWG(7/0.08TC)*4C+AB (16/10/0.08 85%TC)OD: 4.2MM
 - JACKET COLOR: BLACK.
 - CABLE MARKING: E515987 𠄎 AWM STYLE 2725 80℃ 30V VW-1 RoHS C1
 - Connector P1:
 - USB C MALE 3.1, GOLD FLASH ON SHELL, WITH PCB, BLACK INSULATOR.
 - Molded Boot: 45P PVC color Black
 - DP M ABS SHELL Color: Black
 - TRANSPARENT DUST COVER
 - Connector P2:
 - UTCDP-6FT(VIA) With PCB SHELL Gold Plated
 - Electrical Test:
 - 100%Test(Open ,Short ,Wire Map)
 - CONTACT RESISTANCE 3 OHM MAX
 - INSULATION RESISTANCE: 10M OHM MIN
 - HI-POT: 300V DC/10 ms
 - RESOLUTION: 4K*2K@60Hz
 - PACKAGING: EACH CABLE ASSEMBLY TO BE INDIVIDUALLY BAGGED

P/N	LENGTH
BC-DC003F	3 FT ±.79" [915 mm ±20 mm]
BC-DC006F	6 FT ±1.18" [1830 mm± 30mm]
BC-DC010F	10 FT ±1.97" [3050 MM± 50mm]



THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING

DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE

DIMENSIONS: INCHES [METRIC]

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±.005 [0.13] ANGLES ARE ± 1°

SHEET NO. 1 OF 1

206 Van Vorst Street
Jersey City, NJ 07302
+1 201 432 0463
<http://www.belfuse.com>

TITLE: USB TYPE C 3.1 MALE TO DISPLAY PORT CABLE ASSEMBLY

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF BEL FUSE, INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF BEL FUSE, INC.

DRN BY: GL	DATE 12/18/20
APPD BY: ADB	DATE 12/21/20
DWG NO. CT999236	REV. A0