

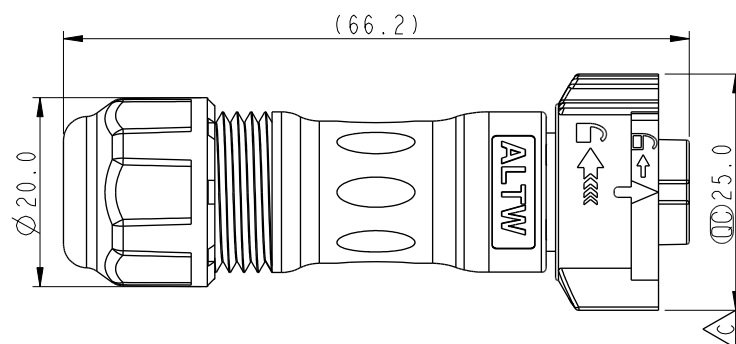

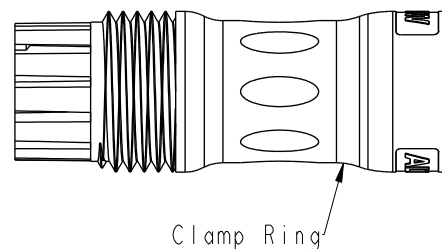


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C191299	2019/07/26	Jane	Update Ordering Information
C	C192023	2019/11/20	Vicky	△C X4
D	C231241	2023/09/22	Ruru	△D X2



XX: No. Of Pin

BD-XXBFFA-QL8XP0





- S: With Red Color Seal 1, Cable OD 5.0~6.0mm.
M: With Yellow Color Seal 2, Cable OD 6.0~8.0mm.
L: With Blue Color Seal 3, Cable OD 8.0~10.0mm.
A: With Seal 1 & Seal 2 & Seal 3.




Note:


- * ∅ Important Dimension
- * Waterproof Rate: IP68, mated 1m/24h
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Clamp Ring: Thermoplastic, Black
- * Sealing Nut: Thermoplastic, Black
- * Seals: Rubber
- * One set unassembled in one pe bag

Pin
Assignments
Front View


2 Pin




3 Pin




4 Pin




5 Pin



6 Pin



7 Pin



8 Pin

UNIT:mm



TOLERANCE

±0.5mm

TITLE

XLOK, B-5A, CABLE W/O SR
F, F, FI CRIMP, XLOK

SCALE

1:1

SIZE

A4

SHEET

1

OF

1

REV.

D

WC-REV.

A.5

QC

Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO

DWG NO

CUSTOMER

BD-XXBFFA-QL8XP0
ALTW

DRAWN BY

Jane

CHECKED BY

Brady

APPROVED BY

Neo

DATE

2019-07-26

DATE

2019-07-26

DATE

2019-07-26