REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1590399~402	2015/09/11	Ruru	Change Logo & Note
C	LE315C0398~401	2015/12/16	Ruru	Modify Ball-marker
D	LEN16C0013~016	2016/12/05	Vicky	Upfate Note

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

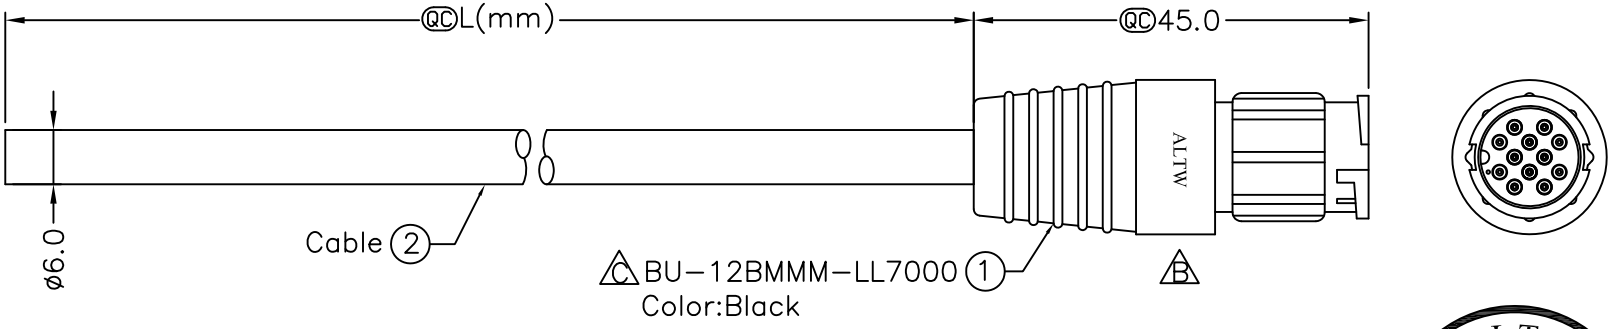

ALTW
DCC. DEPT.
CONFIDENTIAL
2016.12.06
ISSUED

ALTW
CONFIDENTIAL
2016.12.05
R&D DEPT.

BU-12BMMM-LL7AXX

XX:01~99Meter
01:01Meter
02:02Meters
:
:
99:99Meters

Cable Length(L):01~99

12	Light Green	淺綠
11	Purple	紫
10	Orange	橙
9	Black	黑
8	Red	紅
7	Pink	粉紅
6	Gray	灰
5	Yellow	黃
4	Green	綠
3	White	白
2	Blue	藍
1	Brown	棕
Conn	Wire Color	
Pin Out		



Pin Assignments
Front View前視圖

Note:
* QC Important Dimension.
* Waterproof Rate: IP67
* Housing: Nylon+GF, Black
D * Male Pin: Copper Alloy,Gold Plated
* Cable: UL2464 26AWG*12C+Drain+Al/My, UV Resistant, OD=6.0mm, Black
B * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm

UNIT:mm	TITLE: Lock Type Cable Assembly-180° 12Pin Male Connector Male Pin(2A)	ITEM NO	DRAWN BY: Vicky / DATE: 2016/12/05
TOLERANCE: ±0.5mm	SCALE: Free / SHEET: 1 OF 1	DWG NO: BU-12BMMM-LL7AXX	CHECKED BY: Rita / DATE: 2016/12/05
	REV: D / SIZE: A4 / QC :Inspection Item	CUSTOMER: ALTW	APPROVED BY: Max / DATE: 2016/12/05

Amphenol LTW
安費諾亮泰企業股份有限公司