

R D 3 12 64 J M 26 2 64 R. D.

1916-042-3

Honeywell MICRO SWITCH ENCLOSED BZE7-2RN SERIES CHART I.

THIRD ANGLE PROJECTION

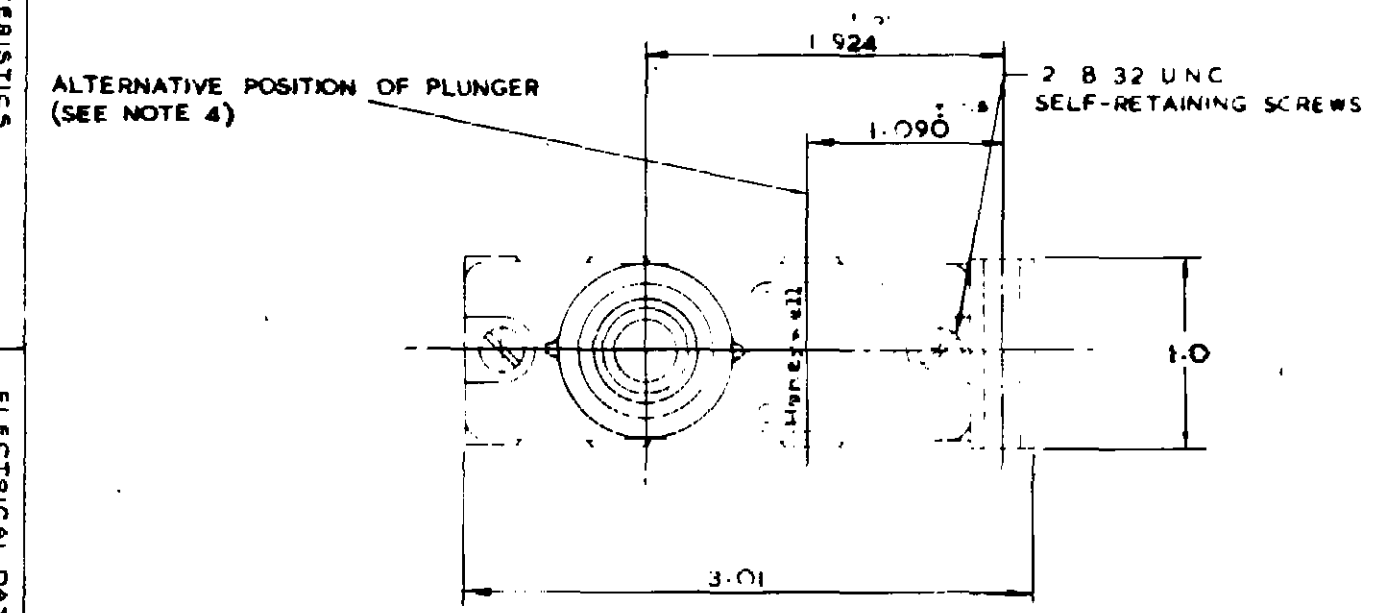

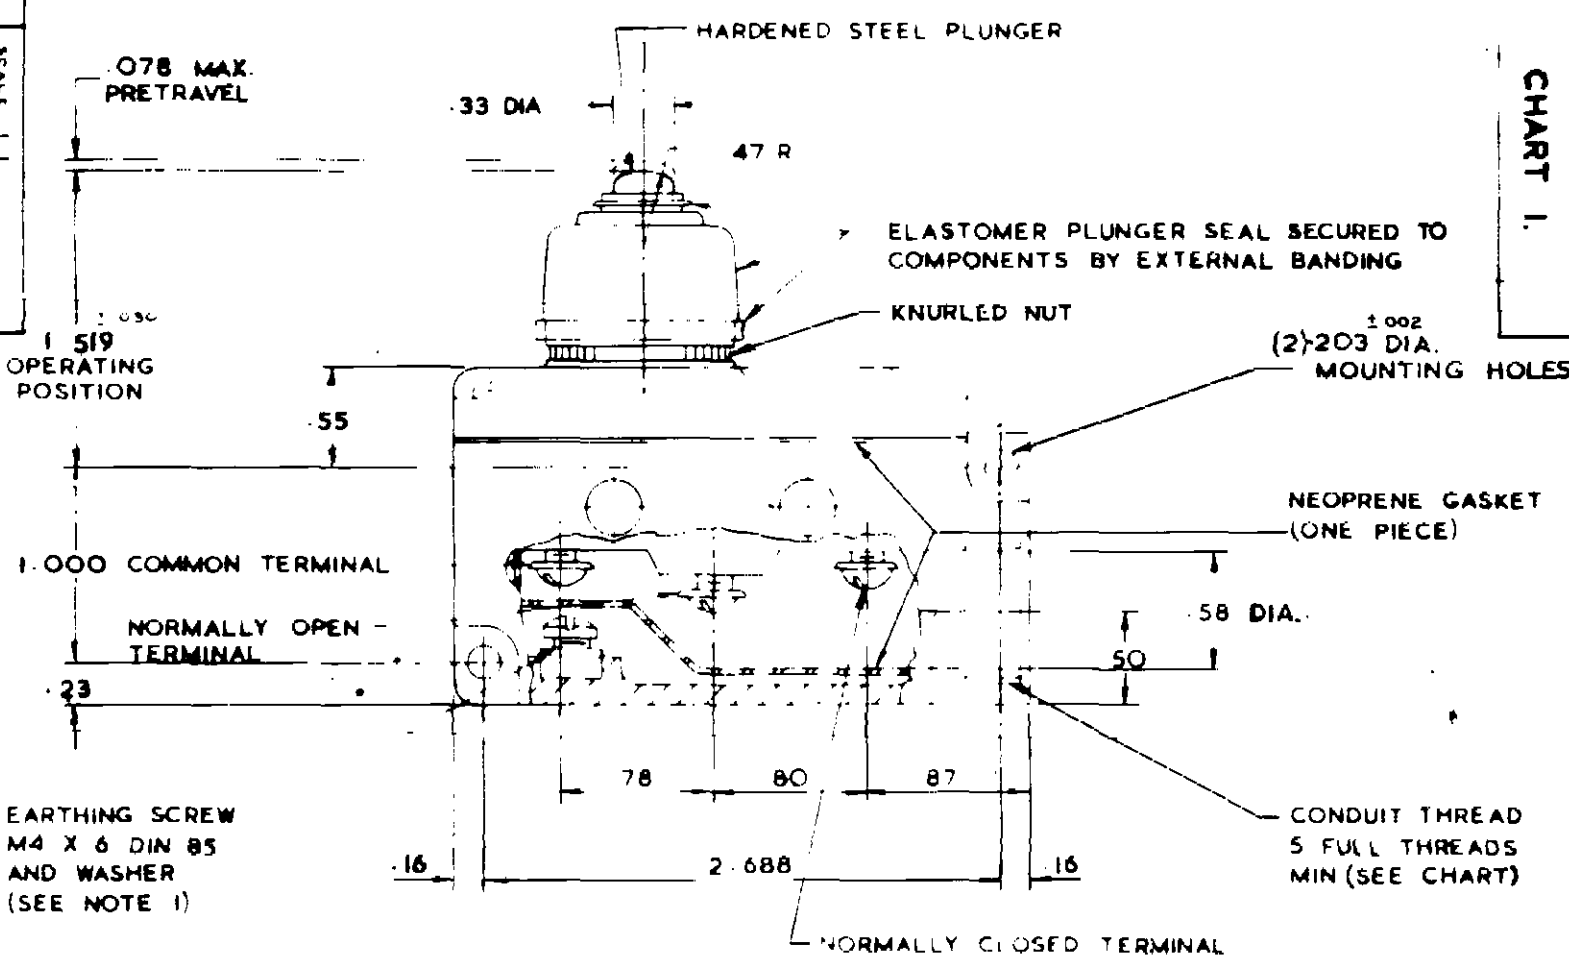

CHARACTERISTICS	
OPERATING FORCE	9 24 OZS
RELEASE FORCE	4 OZS MIN
DIFFERENTIAL TRAVEL	002 MAX
OVERTRAVEL	219 MIN

ELECTRICAL DATA	
CONTACT ARRANGEMENT	S P D T
BREAK DISTANCE	020 MIN
	15A-125, 250, OR 480 VAC; 1/2A-125 VDC; 1/4 A-250 VDC

SCALE 1 1

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

TOLERANCES ARE
ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES ±

WEIGHT

HONEYWELL LTD., BRACKNELL, BERKSHIRE & NEWHOUSE, LANARKSHIRE.

NOTE

1- EARTHING SCREW AND WASHER PROVIDED ON P.G. AND -C LISTINGS ONLY
2- ALUMINIUM ENCLOSURE FINISHED WITH GREY PAINT
3- 6-32 U N C X 219 REF TERMINAL SCREWS AND CUPWASHERS
4- COVER, PLUNGER AND BASIC SWITCH MAY BE REMOVED AS A UNIT AND MOUNTED OPPOSITE HAND TO THAT SHOWN

CATALOGUE LISTING	ISSUE	CHECK BY	REL. No.	CONDUIT THREAD	BASIC SWITCH REPLACEMENT	REMARKS
BZE7 – 2RN – C	2		MS-40302	20 MM TO BS. 4568	BZ-2RQ77-N23	
BZE7 – 2RN	6		1916-042-3	1/2-14 N.P.S.M	BZ-2RQ77-N23	
BZE7 – 2RN – B	6		1916-042-3	3/4 COND. TO BS.31.	BZ-2RQ77-N23	
BZE7 – 2RN – P.G	6		1916-042-3	P.G. 13,5	BZ-2RQ77-N23	
BZE7-2RN-P.G.11	4		M.S. 1522	P.G.11	BZ-2RQ77-N23	
BZE7M-2RN-B	1			3/4 COND. TO B.S. 31.	BZ-2RQ77-AM.	