


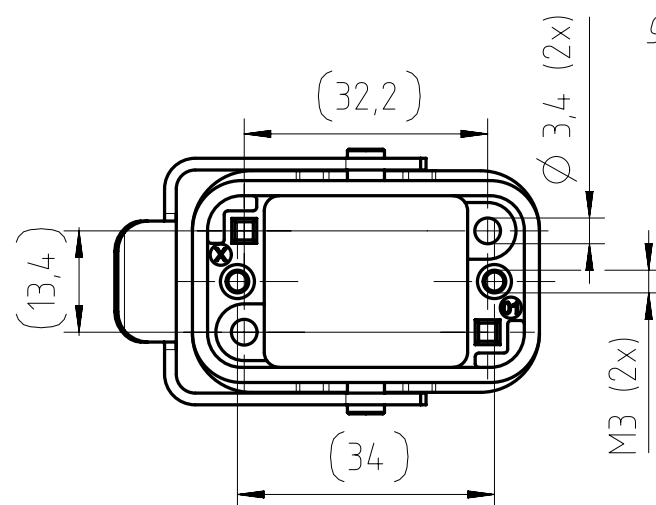
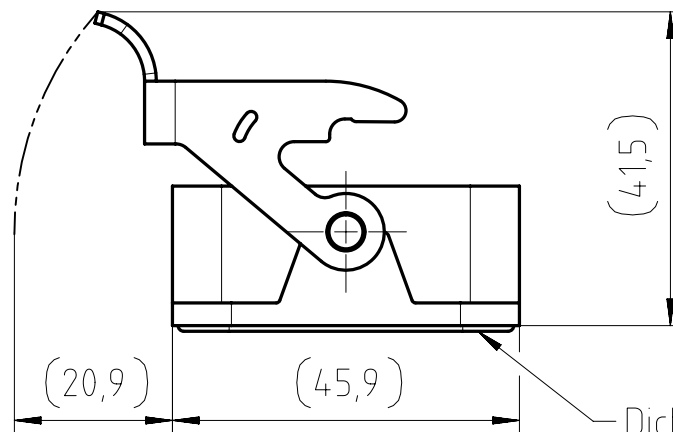
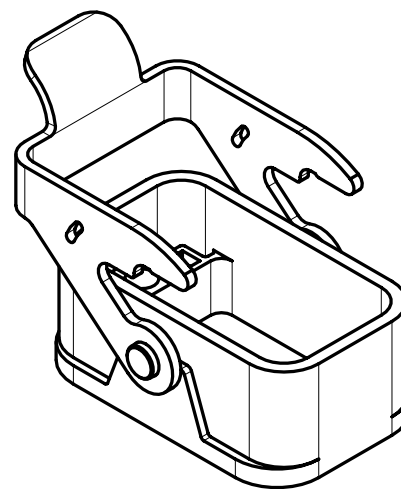


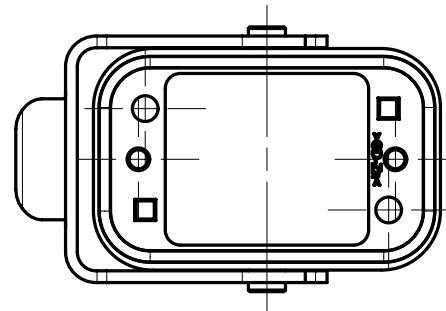

Dichtung (geklebt)
gasket (glued)

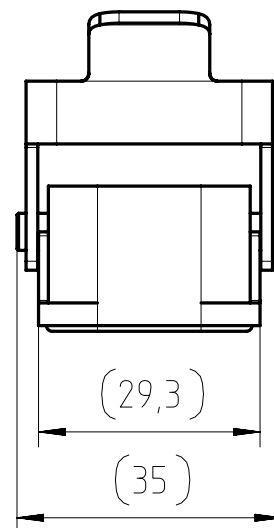

Montageausschnitt
panel cut-out

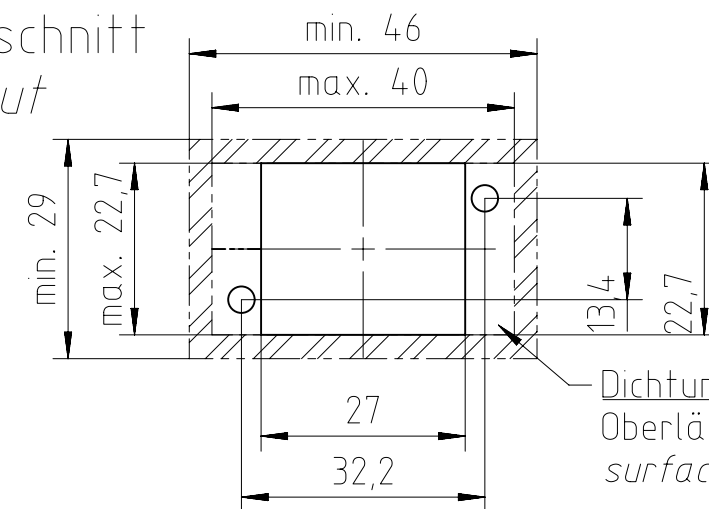

Dichtungsbereich / sealing area
Oberflächenanforderungen
surface requirements:

- $\sqrt{Ra0,8}$

- $\square 0,05$

- frei von Verschmutzungen
free of contaminations.

Characteristics

General Characteristics	Standard	Value
flammability	UL 94	V-0
Climatical Characteristics	Standard	Value
climatic category	IEC 60068-1	40 / 125 / 21
upper temperature	IEC 60512-11-9	+125 °C
lower temperature	IEC 60512-11-10	-40 °C
Mechanical Characteristics	Standard	Value
Degree of protection in locked position	DIN 40050	IP 65
Fastening torque for the screws of the contact insert		1 Nm
Materials	Standard	Value
housing bulkhead mounting		zinc alloy, Ni plated
lever		steel, zinc coated
gasket		HNBR
color		grey

Gewicht (errechnet) / Calc WT: 60,8 g				Zul. Abw./Tolerances:		Maßstab / Scale: 1:1		A3				
 Prüfmaß / Testdimension				ISO 2768-m		 DIN / ISO 13715		CUSTOMER DRAWING				
Teileindex Partindexnumber						Anbaugehaeuse housing bulkhead mounting						
				2014	Datum/Date							Name
				Gez.	21.01.							Holley
				Drawn								
				Gepr.								
				Checked		i.f.f.						
				Amphenol-Tuchel Electronics GmbH			Blatt/Sheet 1					
03	201500351	07.05.15	Wöl.				M C146 30F008 001 12					
02	201400030	16.12.14	Holley				1 Bl.					
Index	Änderung/Description	Datum/Date	Name				Ers. f. / Replacement for: M-C146 30F008 001 12 Rev01					