

Bulgin's range of **high quality rocker switches** includes a huge choice of **single** and **double contact** options available in various sizes, colours, terminations, actuator types and **ratings up to 20A, 277Vac**, allowing for virtually any design configuration.

- Available types: Ultra-thin, Miniature, Twin unit, Miniature round and Standard
- Rating from 10A, 250V ac up to 20A, 277V ac
- Single & double contact variants available
- Push-on, solder & PCB terminals
- Illuminated and non-illuminated options
- High in-rush (ON-OFF types)
- Matching Indicators
- Splash resistant options
- Choice of bezel styles and sizes, panel cut-outs and actuators
- Choice of switching circuits including 3 position



8800 Thinline Rocker Switches

10A 250Vac










Key Features

- Ultra thin rocker switch
- Ratings up to 15A, 250Vac
- Single and twin gang
- Panel cut out:
Single 19.3 x 6.8
Twin 19.3 x 13.4


Approvals and specifications

- 6(2) A 250 V AC 5E4 T100
10(6) A 250 V AC 1E4 T100
Inrush 10/50 A 250 V AC 1E4 T100
 - UL 15A 250Vac (Twin unit is 10A 250Vac)
UL 125Vac 1/2hp
UL 100°C, CSA file LR10990
- 3mm contact gap.


Terminal	Function	Rocker	Body	Body Colour	Rocker Colour
H 	 Switches are ON when pressed over terminal 1 8800  ON - OFF Single contact		A. Single contact Panel Cut  Bezel  *Optional profile for orientation	B Black R Red W White	B Black R Red W White
T 	 Switches are ON when pressed over terminal 1 or 3 8800  ON - OFF Twin contact		B. Single contact - Twin Panel Cut  Bezel  *Optional profile for orientation Panel thickness Dim X 0.75-1.2 19.1/19.2 1.25-1.99 19.3/19.4 2.00-3.00 19.7/19.8 Cut-outs must be punched in the direction of insertion	B Black R Red W White	B Black R Red W White
X 	 Switches are ON when pressed over terminal 1 or 3 8800  ON - OFF Twin contact				

Dimensions

8800VA (H terminals shown)



8800V/8800VA (H terminals shown)



Legend	Legend Colour	Options
Blank	Blank	Finish Matt finish only.
132	B Black	Colour Call sales for custom colours. A full range is available for large orders.
	W White	Legend printing Select from the examples or call sales for custom legends.

Examples



▮ X8800VA



▮ X8800VA
▮ T8800VA - - -



▮ X8800VA
▮ T8800VA - - -



▮ H8800V/H8800VA
▮ T8800V/T8800VA



▮ H8800V/H8800VA
▮ T8800V/T8800VA

8500 Rocker Switches - Miniature

15A 250Vac Single & Double Contact











Key Features

- Miniature rocker switch
- Ratings up to 15A, 250Vac
- Single & double contact in same body size
- Illuminated & non-illuminated
- Matching indicators
- Industry standard panel cut-out
- Rotary and push button actuator options
- Panel cut out: 19.3 x 12.9


Approvals and specifications

- 6(4) A, 250 VAC, 5E4, T125
- 10(6) A, 250 VAC, T125
- 10(6) A, 250 VAC, T100
- UL 15A Non Ind 250Vac, 14A Ind 250Vac, 10A 277Vac
- UL 250Vac 1/2hp, 125Vac 1/4hp
- UL 105°C, (non lit)
- 3mm contact gap.


Terminal	Function	Rocker	Body	Body Colour	Rocker Colour
H 	 ON OFF Switches are ON when pressed over terminal 1	H Slotted for custom caps 	B Standard body with terminal barrier 	B Black	Un-Lit B Black
K 	8500 ON - OFF Single contact (Uses terminals 1a & 2a)	R Semi-rotary (not lit) 		R Red	R Red
L  Right angle version of K terminal available on 8500 only	8503 ON (lit) - OFF Single contact	D Paddle lever (not lit) 	BC Body without terminal barrier  Dimensions for snap-in fixing Panel thickness Dim X 0.75-1.25 19.1/19.2 1.25-2.00 19.3/19.4 2.00-3.00 19.7/19.8	W White	Lit A Amber
R 	8550 ON - OFF Double contact	V Curved (not lit) 			G Green
T  Solder	8553 ON (lit) - OFF Double contact	V Curved (lit) 			C Clear
	8580 Available with H terminals only	X Two colour (not lit) 			R Red
	 Indicator UL/CSA E63363	A Softline lens 			
		P Push button operation (8500 only) See drawing opposite			

Dimensions


"B" body with barrier for H, T and K terminals



"BC" body w/o barrier primarily for L or R terminals (can be used for all terminals)



'PO' Actuator and body - push button function (8500 only)



Insert Colour	Lamp Voltage	Legend	Legend Colour	Options
X Rocker Only	Blank	Blank	Blank	Finish Matt finish only.
R Red	2 125V Neon	076	B Black	Colour Call sales for custom colours. A full range is available for large orders.
W White	3 250V Neon		W White	Legend printing Select from the examples or call sales for custom legends.
Blank Leave blank for other Rocker types	7 12V Filament			Lamp voltage Call sales for details of available voltages.
	8 24V Filament			Protective cover L167 Snaps on to bodies with V or X style rockers and A lens. This reduces panel thickness by 0.8mm.
				

Examples



H8500VB ---
T8500VB ---



H8550VB ---
T8550VB ---



H8550HB ---
T8550HB ---



H8550XB ---
T8550XB ---



H8550RB Semi-rotary
A splash proofing option



H8500PO ---
Pushbutton option



H8553VB ---
T8553VB ---



H8580AB ---

8600 Rocker Switches - Miniature

10A 250Vac Single & Double Contact



Key Features

- Miniature rocker switch
- Illuminated and non illuminated
- Ratings up to 16A, 250Vac
- Matching indicators
- Single & double Contact
- Panel cut out single: 19.3 x 12.9 double: 19.3 x 21.9
- ON/OFF, C/O, biased and centre off switching
- Push on, solder and PCB terminals


Approvals and specifications

- 10(4)A 250Vac T90 (unless noted below)
- UL See ratings below UL 65°C, file E45221
- 3mm contact gap except where marked μ .


Terminal	Function	Rocker	Body	Body Colour
H 	Approvals & ratings vary with function 8600 10(4)A 16A 250V, 10A 277V 1/2HP 277V, 1/4HP 125V ON - OFF 8650 10(4)A 10A 277V 1/2HP 277V, 1/4HP 125V ON - OFF 	V Curved V Curved (lit) 	B Single Contact Panel cut out Bezel Single Contact dimensions for snap-in fixing Panel thickness 0.75-1.25 1.25-1.99 2.00-3.00 Dim X 19.1/19.2 19.3/19.4 19.7/19.8	B Black R Red W White
T 	8601 6(1)A 16A 250V, 6A 277V ON - OFF (momentary ON) 8651 6(1)A 6A 277V ON - OFF (momentary ON) 	F Flat Indicator only (Single contact) 	B (Double Contact) with terminal barrier BC (Double Contact) w/o terminal barrier Panel cut out Bezel Double Contact dimensions for snap-in fixing Panel thickness 0.75-1.24 1.25-1.99 2.00-3.00 Dim X 19.1/19.2 19.3/19.4 19.7/19.8 Cut-outs must be punched in the direction of insertion	
X 	N/A ON - OFF Lit 8610 6(1)A 10A 277V 1/2HP 277V, 1/4HP 125V ON - ON 8660 6(1)A 10A 277V 1/2HP 277V, 1/4HP 125V ON - ON 	8653 10(4)A 6A 277V ON - OFF Lit 		
Double Contact switches with "X" terminals are supplied without terminal barriers	8611 6A 277V ON - ON (momentary 1 side) 8661 6A 277V ON - ON (momentary 1 side) * 8611 and 8661 not covered by ENEC			
	8620 μ ON - OFF - ON 8670 μ ON - OFF - ON 			
	8630 6(1)A UL E63363 CSA LR29381 	N/A		
	Indicators			

Dimensions

Single contact



Double contact



Rocker Colour	Lamp Voltage	Legend	Legend Colour	Options
Un-Lit B Black	 Blank	 Blank	 Blank	Finish Matt finish only.
R Red	2 125V Neon	076	B Black	Colour Call sales for custom colours. A full range is available for large orders.
W White				Legend printing Select from the examples or call sales for custom legend.
Lit A Amber	3 250V Neon		W White	Lamp voltage Call sales for details of available voltages.
G Green				Blanking plate A8634FB Dummy unit to fill unused panel holes. Single contact size only.
C Clear	7 12V Filament			Protective covers L167 for SP L180 for DP Snap on to bodies with V rocker or F lens. This reduces panel thickness by 2.2mm.
R Red	8 24V Filament			
				Single Contact options Most switches shown can have single contact switching in double contact bodies.

Examples



H8600VB ---
T8600VB ---



H8600VB ---
T8600VB ---



H8630FB ---
T8630FB ---



H8650VB ---
T8650VB ---




H8660VB ---
T8660VB ---



H8653VB ---
T8653VB ---

8620 & 8670 Rocker Switches

3 Positions - 10A 250Vac












Key Features

- 3 position miniature rocker switch
- Panel cut out: single: 19.3 x 12.9 double: 19.3 x 21.9
- Ratings up to 15A, 250Vac
- Single & double Contact
- Centre off switching
- Push on, solder and PCB terminals
- Matching indicators

Approvals and specifications


- 10(4)A 250Vac T90
- UL 15A 277Vac (Single Contact)
- UL 250Vac 1/2hp (Single Contact)
- UL 125Vac 1/4hp (Single Contact)
- UL 10A 277Vac (Double Contact)
- UL 277Vac 1/2hp (Single & Double Contact)
- UL 90°C
- μ contact gap.

Terminal	Function	Rocker	Body	Body Colour	Rocker Colour
H 	 8620 	V  Curved	B Single Contact  Panel thickness 0.75-1.24 1.25-1.99 2.00-3.00 Dim X 19.1/19.2 19.3/19.4 19.7/19.8	B Black	Lit (DP) A Amber
T 	 8670 	H  Slotted for actuator (8620 only)	B Single Contact - Twin  Panel thickness 0.75-1.24 1.25-1.99 2.00-3.00 Dim X 19.1/19.2 19.3/19.4 19.7/19.8	R Red	C Clear
X  PCB 0.8sq Double Contact switches with X terminals are supplied without terminal barriers				W White	G Green
					R Red
					Lit (DP)
					B Black
					R Red
					W White

Out-outs must be punched in the direction of insertion


Dimensions

Single Contact




Terminals shown are "H" 4.8 push on type

Double Contact



Terminal spacing 10.2 between Contact centres

Double Contact



Terminal spacing 10.2 between Contact centres

Lamp Voltage	Legend	Legend Colour	Options
Blank	Blank	Blank	Finish Matt finish only.
2 125V Neon	076	B Black	Colour Call sales for custom colours. A full range is available for large orders.
3 250V Neon			Legend printing Select from the examples or call sales for custom legend.
7 12V Filament			Lamp voltage Call sales for details of available voltages.
8 24V Filament		W White	Blanking plate A8634FB Dummy unit to fill unused panel holes. Single Contact size only.
			Protective covers L167 for SP L180 for DP Snap on to bodies with V rocker or F lens. This reduces panel thickness by 2.2mm. 
			Single Contact options Most switches shown can have single Contact switching in double Contact bodies.

1250 Rocker Switches

10A 250Vac



C1250AP ---



C1250AN ---




Key Features

- Standard rocker switch
- Double Contact in single Contact body
- Snap in or sub panel mount
- Integral terminal barrier
- Push on or PCB terminals
- Panel cut out: 27.2 x 12.4 (snap in) 26.3 x 12.4 (sub panel mount)

Terminal	Function	Rocker	Body	Body Colour	Rocker Colour
C 6.3 x 0.8	 On when pressed over terminal 1 1250 ON - OFF Double Contact Contacts are 9.0mm between centres.	A Curved Shown in N body	N Panel cut-out Sub-panel Facia Bezel Panel thickness 0.75-1.24 1.25-1.99 2.00-3.00 Dim X 26.1/26.2 26.3/26.4 26.7/26.8	B Black W White	B Black W White
X PCB 0.8sq (N body only)	 On when pressed over terminal 1 1250SP ON - OFF Single Contact	 Shown in P body	P Panel cut out Bezel Panel thickness 0.75-3.00 Out-outs must be punched in the direction of insertion		G Grey

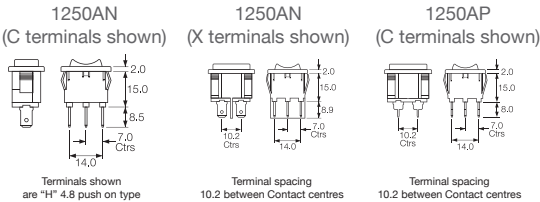Dimensions



Approvals and specifications

-  10(6)A 250Vac T100
6A 400Vac T100
1A 30Vdc
-  UL 10A 250Vac
UL 16A 250Vac Resistive
UL 125Vac 1/2hp
UL 1A 30Vdc
UL 100°C
3mm contact gap

Legend	Legend Colour	Options
Blank	Blank	Finish Matt finish only.
085	B Black	Colour Call sales for custom colours. A full range is available for large orders.
	W White	Legend printing Select from the examples or call sales for custom legend.

6000 SP Splash Resistant Rocker Switches

16A 250Vac



Key Features


- Ratings up to 20A, 277Vac
- Positive switch action
- Distinctive styling
- Illuminated & nonilluminated
- Single Contact
- Panel cut out: 30.1 x 11.1mm







Approvals and specifications

-  European 16(4)A 250Vac T125, 10A 400Vac T125
-  UL = 20A 277Vac, 1 1/2HP 250Vac 1HP 125Vac
cUL = 20A 277Vac, 1HP 125Vac, 1/2HP 125Vac
- 3mm contact gap with Positive Break switching.
Call factory for IP details.

Vary with Function

Approvals & ratings vary with function
ON OFF Switches - ON when pressed
over terminals 3.




Terminal	Function	Rocker	Body	Body Colour	Rocker Colour	Lamp Voltage
C  6.3 x 0.8	6000  ON - OFF 6001  ON - OFF (momentary ON)	A Softline Matt 	L Panel cut-out ** Bezel  30.0/30.1 11.0/11.1 31.5 14.0 R2.0 Cut-outs must be punched in the direction of insertion	B Black W White	Lit (DP) A Amber C Clear G Green R Red	Blank 2 125V Neon
H  4.8 x 0.8	6002  ON - OFF (momentary OFF) 6003  ON - OFF Lit	A Softline Matt 			B Black R Red	3 250V Neon
S  9.7 Screw & Clamp N/A for assemblies with 3 terminals	6008  ON - OFF Lit (Unswitched neutral) 6009  ON - OFF (momentary ON) Lit (Unswitched neutral) 6010  ON - ON 6011  ON - ON (momentary 1 side)	P Lit window Matt 			Lit (DP) B Black R Red W White	5 12Vdc LED (P Rocker) 6 24Vdc LED (P Rocker) 7 12V Filament 8 24Vdc Filament

Integral Splash Resistance



Current carrying parts are protected from moisture. Droplets which may enter the switch are channelled out through ports in the switch body. For IP65 see options below

Dimensions



Panel thickness
L 0.75 to 2.5mm
** For cut-out details on momentary switches call sales

Legend	Legend Colour	Options
 Blank	 Blank	G74 Protective Cover
1223	B Black	Finish Matt is standard.
		Colour Call sales for custom colours. A full range is available for large orders.
		Legend printing Select from the examples or call sales for custom legends.
	W White	Lamp voltage Call sales for details.
		Protective cover A snap on cover is available (add G after body code), this reduces panel thickness by 2mm.
		
		Panel sealing washer W46 is available, this reduces panel thickness by 1.2mm.
		Covers are not suitable for momentary types. For all options call the factory

Examples



C6000AL ---



C6000AL ---



C6010AL ---



C6003AL ---




C6003PL ---



C6030AL ---

6050 DP Splash Resistant Switches

& Twin Switches - 16A 250Vac



Key Features

- Ratings up to 20A, 277V ac
- Positive switch action
- Distinctive styling
- Illuminated & non-illuminated
- Double Contact
- DC LED Illumination Available
- Panel cut out: 30.1 x 22.2mm





Approvals and specifications

European 16(4)A 250Vac T125, 10A 400Vac T125

UL (except 6054 & 6055 Switches) 20A 277Vac, 250Vac 11/2hp, 125Vac 1hp

UL 100°C

3mm contact gap with Positive Break switching.

Terminal	Function	Rocker	Body	Body Colour	
C 	6050  ON - OFF 6051  ON - OFF (momentary ON) 6052  ON - OFF (momentary OFF) 6053  ON - OFF Lit 6054  ON - OFF (momentary ON) Lit 6055  ON - OFF (Single Contact) (momentary ON) Lit 6056  ON - OFF (Single Contact) Isolated light 6057  ON - OFF Isolated light 6058  ON - OFF (Single Contact) Lit 6059  ON - OFF (Single Contact) (momentary ON) Isolated light	6060  ON - ON 6061  ON - ON (momentary 1 side) 6062  2 Circuit ON - ON (In house tests only) 6066  ON - ON (Single Contact) Isolated light 6067  ON - ON Lit 6068  ON - ON 1 Contact ON - OFF Lit 1 Contact 6090  ON - OFF 1 Contact ON - OFF Lit 1 Contact 6091  ON - OFF (momentary ON) Lit 6092  ON - OFF 1 Contact ON - ON 1 Contact Lit Circuits are Double Contact unless described otherwise	A  Softline Matt A  Softline Matt P  Lit window Matt  Lit window	L  Double Contact Panel cut-out ** Bezel L  Twin units Contact sales for information on splash resistance and IP ratings	Lit (DP) A Amber C Clear G Green R Red Un-Lit (DP) B Black R Red W White


Integral Splash Resistance



Current carrying parts are protected from moisture. Droplets which may enter the switch are channelled out through ports in the switch body.

For IP65 see options below

Dimensions




Panel thickness
L 0.75 to 2.5mm


** For cut-out details on momentary switches call sales

Terminal spacing - Contacts 10.5 between centres

Vary with Function

Approvals & ratings vary with function
ON OFF Switches - ON when pressed over terminals 3 & 6.



Rocker Colour	Lamp Voltage	Legend	Legend Colour	Options
B Black	Blank	Blank	Blank	G72 Protective Cover
R Red	2 125V Neon	1223	B Black	Finish Matt is standard.
W White	3 250V Neon		W White	Colour Call sales for custom colours. A full range is available for large orders.
	5 12Vdc LED (P Rocker)			Legend printing Select from the examples or call sales for custom legends.
	6 24Vdc LED (P Rocker)			Protective cover The 6050 series is a water through design. For a higher level of sealing, a snap on cover is available (add G after body code). This reduces panel thickness by 1mm.
	7 12V Filament			
	8 24Vdc Filament			Panel sealing washer W42 is available. This reduces panel thickness by 1.00mm. Covers are not suitable for momentary types.
				IP Ratings Call the sales for details.
				Terminal Link P1067 connects the Contacts of a double Contact switch or twin unit.
				# Mounting orientation may affect IP rating.

Examples



C6050AL - - -



C6053AL - - -



C6053PL - - -



C6000A/C6000AL



C6003P/C6003PL



C6003P/C6030AL

1500 Standard & 1300 High Inrush Switches

150A to EN61058-1 and 16A 250Vac



Key Features

- Standard rocker switch
- Non-illuminated
- 150A inrush
- Choice of switching circuits including 3 position
- Choice of bezel styles
- Choice of panel cut outs
- Matching indicator
- Single Contact
- Splash resistant option
- DC LED Illumination Available for "P" Rocker
- Panel cut out 'A' style: 27.3 x 12.3mm






Approvals and specifications

1500 Series 16(4)A 250Vac T125 (European Approvals Pending)


UL 16A Non Ind 250Vac, (2 posn) 250Vac 1hp, 125Vac 1/2hp, (3 posn) 250Vac 1/2hp, 125Vac 1/4hp
1330 36Vdc 14A
1350 72 Vdc 7A
1500 & 1510 14 Vdc 10A
UL 85°C

In house test:
10A 24Vdc—Indicative rating only

1300 series 16(4)A 250Vac T125 1E4 (10,000 Ops.)

Terminal	Function	Rocker	Body	Finish	Body Colour
C 	Standard 1500 ON - OFF 1501 HP rating N/A ON - OFF (momentary ON) 1502 HP rating N/A ON - OFF (momentary OFF) 1510 µ HP rating N/A ON - ON 1511 µ HP rating N/A ON - ON (momentary 1 side) 1520 µ 125V & 250V 1/2 HP H terminal rated T100 only ON - OFF - ON 1521 µ HP rating N/A H terminal rated T100 only ON - OFF - ON (momentary 1 side) 1522 µ HP rating N/A H terminal rated T100 only ON - OFF - ON (momentary 2 sides) 0430 (Indicator) HP rating N/A H terminal rated T100 only 1484 In-house tested to 10(3)A 250Vac 3 position selective 1487 In-house tested to 10(3)A 250Vac 3 position selective High Inrush 1300 ON - OFF	A  B  H  V  W  X  F  A 	Panel cut-out Cut-outs must be punched in the direction of insertion A  B  L  Q  R  T  Bezel Cut-outs must be punched in the direction of insertion      	M Matt G Gloss Applies to both Rocker & Body	B Black R Red W White

Dimensions



Panel thickness
A,Q 0.75 to 3.3mm
L,B,T 0.75 to 2.5mm
R 0.75 to 3.0mm


* For cut-out details on momentary switches call sales

Splash Resistance

1500 W and B splash resistant options

Feather edge seals and a close fitting collar protect current carrying parts from moisture.

B option has Hytrel collar/seals for enhanced protection.



1300 High inrush, positive break switching


The 1300 series mechanism ensures contact welds formed at switch-on are positively separated by the plunger tube acting directly on the step in the moving contact.

150A Inrush to EN61058-1
UL 20A 250Vac 1hp, 125Vac 1/2hp
UL 85°C

In house test:

20A 24Vdc—Indicative rating only

3mm contact gap except if marked μ .

Rocker Colour	Lamp Voltage	Insert Colour	Legend	Legend Colour	Options
Un-Lit	Blank	Blank	Blank	Blank	Finish Matt is standard.
B Black	2 125V Neon	R Red	602A	B Black	Colour Call sales for custom colours. A full range is available for large orders.
R Red	3 250V Neon	W White		W White	Legend printing Select from the examples or call sales for custom legends.
W White	7 12V Filament				Lamp voltage Call sales for details.
Lit	8 24Vdc Filament				Blanking plates A0434 - - Dummy units to fill unused panel holes.
A Amber					Protective cover Snaps on to A, L, Q or T bodies (add G after body code in cat no.), this reduces panel thickness by 1mm.
C Clear					
G Green					Panel sealing washer W46 is available for the same body sizes, this reduces panel thickness by a further 0.8mm. Covers are not suitable for momentary types.
R Red					For all options call sales.

Examples



C1500AR - - -
T1500AR - - -



C1500AL - - -
T1500AL - - -



C1500XL - - -
T1500XL - - -



C1510AL - - -
T1510AL - - -



C1520AL - - -
T1520AL - - -



C0430AL - - -
T0430AL - - -

5500 Lit Rocker Series

10A 250Vac



Key Features

- Standard rocker switch
- Illuminated
- Choice of switching circuits
- Choice of bezel styles
- Choice of panel cut outs
- Matching indicator
- Single Contact
- Splash resistant option
- Panel cut out 'A' style:

Approvals and specifications

- 6(4) A, 250 V ac, 50/60 Hz, IP40, 1E4, T85/55, micro disconnection
- 12 A, 250 V ac, 50/60 Hz, IP40, 1E4, T125/55, micro disconnection
- UL 15A 250Vac, CSA 16A Non Ind 250Vac
- UL 250Vac 1hp, 125Vac 1/2hp
- UL 85°C


µ contact gap.

For Twin units repeat the order details for both the left and right sides.


Terminal	Function	Rocker	Body	Body Colour	Rocker Colour
C 6.3 x 0.8	Approvals & ratings vary with function ON OFF Switches - ON when pressed over terminal 3 5500 µ	A Softline (Matt only) 	A Panel Cut - outs B L Q R T 	B Black W White	Un-Lit B Black R Red W White Lit A Amber C Clear G Green R Red
H 4.8 x 0.8	ON - OFF Single Contact 5503 µ	P Lit window (Matt only) 	B L Q R T 	B Black W White	Un-Lit B Black R Red W White Lit A Amber C Clear G Green R Red
T Solder	ON - OFF Lit Switched neutral 5508 µ	P Lit window (Matt only) 	B L Q R T 	B Black W White	Un-Lit B Black R Red W White Lit A Amber C Clear G Green R Red

Dimensions

Panel thickness
A,Q 0.75 to 3.3mm
L,B,T 0.75 to 2.5mm
R 0.75 to 3.0mm



Twin units
 Two single switches or a switch and an indicator light can be assembled side by side in one double Contact body.
 For 5500 range panel cut-out details (L, B and T) call sales.



Terminal spacing -
 Contacts 10.8 between centres (twin units)

For twin units the first set of order format details refer to the left hand unit, when looking at the front of the assembly.
 (This has terminal numbers 1, 2 & 3)

Lamp Voltage	Legend	Legend Colour	Options
Blank	Blank	Blank	Finish Matt is standard.
2 125V Neon	602A	B Black	Colour Call factory for custom colours. A full range is available for large orders.
3 250V Neon			Legend printing Select from the examples or call factory for custom legends.
5 12Vdc LED (P Rocker) IF = 20-30mA		W White	Lamp voltage Call factory for details.
6 24Vdc LED (P Rocker) IF = 20-30mA			Blanking plate A0434 - - (SP) A0494 - - (DP) Dummy units to fill unused panel holes.
7 12V Filament			Protective cover Snaps on to A, L, Q or T bodies (add G after body in cat no.), this reduces panel thickness by 1.00mm.
8 24Vdc Filament			
			Panel sealing washers W46 (Single Contact) and W42 (Double Contact) are available for these body types, this reduces panel thickness by 2mm.
			For all options call the factory.

Examples



C5503AL - - -



C5500AL - - -



C5503PL - - -



C5503A/C5430AL



C5503A/C5503AL



C5503P/C5503PL

1500 Twin Units Switches and Indicators

16A 250Vac














Key Features

- Twin unit rocker switch
- Choice of switching circuits including 3 position
- Push-on, solder and PCB terminals
- Choice of bezel styles
- Choice of panel cut outs
- Matching indicator
- Single Contact switches
- Splash resistant option
- Panel cut out 'A' style: 27.2 x 22.3mm

Approvals and Specifications


- 16(4)A 250Vac T125 (Pending)
- UL 16A 250Vac
- UL (2 posn) 250Vac 1hp, 125Vac 1/2hp, (3 posn) 250 Vac
- 1/2hp, 125Vac 1/4hp
- UL 85°C

For versions with High Inrush or for 50,000 operations,
3mm contact gap except where marked μ .

Terminal	Function	Rocker	Body	Finish	Body Colour	Rocker Colour
C 	Approvals & ratings vary with function ON OFF Switches - ON when pressed over terminal 1 or 4 	A Softline (Matt only) 	Panel Cut - outs Bezel A  22.3/22.4 27.2/27.3 Gloss or Matt B  25.0 30.2	M Matt	B Black	Un-Lit B Black
H 	1500  ON - OFF	B Softline (Matt only) 	B  22.1/22.2 30.0/30.1 Matt only B  25.0 33.4	G Gloss	W White	R Red
T 	1510 μ  ON - ON	W Softline (Matt only) 	L  22.1/22.2 30.0/30.1 Matt only L  25.0 32.0	Applies to both Rocker & Body		W White
K 	1520 μ  ON - OFF - ON	X Softline (Matt only) 	Q  22.3/22.4 28.2/28.3 Gloss or matt Q  25.0 30.2			Lit
X 	0430  Indicator	A Softline (Matt only) 	R  25.3/25.4 28.4/28.5 Matt only R  28.9 33.2			A Amber
		A Softline (Matt only) 	T  22.3/22.4 28.2/28.3 Matt only T  25.0 30.2			C Clear
						G Green
						R Red

Dimensions


Panel thickness
A,Q 0.75 to 3.3mm
L,B,T 0.75 to 2.5mm
R 0.75 to 3.0mm



Call sales for terminal spacing details


Twin units

Two single switches or a switch and an indicator light can be assembled side by side in one double Contact body.



For twin units the first set of order format details refer to the left hand unit, when looking at the front of the assembly.
(This has terminal numbers 1, 2 & 3)

Splash Resistant



Feather edge seals and a close fitting collar protect current carrying parts from moisture.

B option has Hytrel collar/seals for enhanced protection.

Insert Colour	Lamp Voltage	Legend	Legend Colour	Options
Blank	Blank	Blank	Blank	Finish Matt is standard. Colour Call factory for custom colours. A full range is available for large orders. Legend printing Select from the examples or call factory for custom legends. Lamp voltage Call factory for details.
R Red	2 125V Neon	602A	B Black	
W White	3 250V Neon		W White	
	5 12Vdc LED (P Rocker)			
	6 24Vdc LED (P Rocker)			
	7 12V Filament			
	8 24Vdc Filament			

Examples



1550 Standard and 1350 High Inrush

150A to EN61058-1 and 16A 250Vac



Key Features

- Standard rocker switch
- 1350/53 high inrush
- Choice of switching circuits including 3 position
- Push-on, solder and PCB terminals
- Choice of bezel styles
- Choice of panel cut outs
- Matching indicator
- Double Contact
- Splash resistant option
- Panel cut out 'A' style: 27.2 x 22.3mm

Approvals and specifications

1550 Series 16(4)A 250Vac T125 (Pending)

UL 16A 250Vac, (2 posn) 250Vac 1hp, 125Vac 1/2hp, 1350 72 Vdc 7A (3 posn) 250 Vac 1/2hp, 125Vac 1/4hp. UL 85°C


In house test:

10A 24Vdc—Indicative rating only. NB Types fitted with Neon will not illuminate for low DC voltage applications.


1350 series 16(4)A 250Vac T125 1E4 (10,000 Ops.)
1330 series 16(6)A 250Vac T125 1E4 (10,000 Ops.)
150A Inrush to EN61058-1.

Terminal


C




H




K




T



U



X



Function

Standard 1550

1551
HP rating N/A

1552
HP rating N/A

1553
Not W, X or B rocker

1560 μ

1561 μ
HP rating N/A

1562 μ
In house tests only

1570 μ
125V & 250V 1/2 HP
H terminal rated T100 only H terminal rated T100 only

1571 μ
HP rating N/A
H terminal rated T100 only


1572 μ
HP rating N/A
H terminal rated T100 only



0480
X terminal N/A



High Inrush 1350
Not W, X or B rocker



1353
Not W, X or B rocker



High Inrush 1300
ON - OFF


Rocker

A
Softline Matt



B
Splash resistant Softline

V
Curved
Matt or Gloss



W
Splash resistant Curved

P
Lit window Matt




X
Two colour Matt



R
Round



F
Flat Lens Gloss (0480)








A
Softline lens Matt (0480 only) as F but with raised profile



Body

Panel cut-out Bezel
Cut-outs must be punched in the direction of insertion



Approvals and specifications (continued)

 **UL 20A 250Vac 1hp, 125Vac 1/2hp.**
UL 72Vdc 7A, 36Vdc 14A.
UL 85°C.

In house test:

20A 24Vdc—Indicative rating only


3mm contact gap except if marked μ .

Splash Resistance



1300 High inrush, positive break switching
The 1300 series mechanism ensures contact welds formed at switch-on are positively separated by the plunger tube acting directly on the step in the moving contact.


Dimensions



Panel thickness

A,Q 0.75 to 3.3mm
L,B,T 0.75 to 2.5mm
R 0.75 to 3.0mm

* For cut-out details on momentary switches call sales

Finish	Body Colour	Rocker Colour	Insert Colour	Lamp Voltage	Legend	Legend Colour	Options
M Matt	B Black	Un-Lit B Black R Red W White Lit A Amber G Green C Clear R Red	Blank R Red W White	Blank 2 125V Neon 3 250V Neon 5 12Vdc LED (P Rocker) 6 24Vdc LED (P Rocker) 7 12V Filament 8 24Vdc Filament	Blank 602A	Blank B Black W White	Finish Matt is standard. Colour Call sales for custom colours. A full range is available for large orders. Legend printing Select from the examples or call sales for custom legends. Lamp voltage Call sales for details. Blanking plates A0494 Dummy units to fill unused panel holes. Protective cover Snaps on to A, L, Q or T bodies (add G after body in cat no). This reduces panel thickness by 1mm. 
Examples							

Examples



 C1350AL ---



 C1550XL ---



 C1553PL ---



 C1553RA ---
Shown with M614
bezel cover



Optional snap-in
M441 barrier




C1553AA with M616
guard Cut-out
22.0/22.1 x 29.4/29.5
Guard accepts "A"
body only



 C0480RA ---
Shown with
M614 bezel
cover



 C0480AL ---



Panel sealing washer W42 is available for the above body sizes. This reduces panel thickness by a further 1.00mm.
Covers are not suitable for momentary types.

For all options call sales.

1550 Standard & 1350 High Inrush Switches

150A to EN61058-1 and 16A 250Vac/250Vac



Key Features

- Standard rocker switch
- 1350/53 high inrush
- Choice of switching circuits including 3 position
- Push-on, solder and PCB terminals
- Choice of bezel styles
- Choice of panel cut outs
- Matching indicator
- Double Contact
- Option with guard & cover
- DC LED Illumination Available for "P" Rocker
- Bezel size 'G' style 32.0 x 25.0

Approvals and specifications

- UL 1550 Series 16(4)A 250Vac T125 (Pending)
- UL 16A 250Vac, (2 posn) 250Vac 1hp, 125Vac 1/2hp, (3 posn) 250 Vac 1/2hp, 125Vac 1/4hp. UL 85°C.
- 1350 series 16(4)A 250Vac T125 1E4 (10,000 Ops.)
- 1330 series 16(6)A 250Vac T125 1E4 (10,000 Ops.)
- 150A Inrush to EN61058-1.

Terminal	Function	Rocker	Body	Finish	Body Colour	Rocker Colour
C 6.3 x 0.8	Standard 1550 ON - OFF	A Softline Matt 	Panel cut-out Bezel Cut-outs must be punched in the direction of insertion H Matt only	M Matt	B Black	Un-Lit B Black
H 4.8 x 0.8*	1551 HP rating N/A ON - OFF (momentary ON)					R Red
	1552 HP rating N/A ON - OFF (momentary OFF)			G Gloss	W White	W White
K 2.8 x 0.8*	1553 Not W, X or B rocker ON - OFF Lit	V Curved Matt or Gloss Gloss only Lit (not momentary)	G Matt only	Applies to both Rocker & Body		Lit A Amber
T Solder	1560 μ ON - ON					G Green
	1561 μ HP rating N/A ON - ON (Momentary 1 Side)					C Clear
	1562 μ In house tests only ON - ON 2 Circuit					R Red
U Solder	1570 μ 125V & 250V 1/2 HP H terminal rated T100 only H terminal rated T100 only ON - OFF - ON	P Lit window Matt Lit (not momentary)				
	1571 μ HP rating N/A H terminal rated T100 only ON - OFF - ON (momentary 1 side)					
X Right angle T Solder (Not DP)	1572 μ HP rating N/A H terminal rated T100 only ON - OFF - ON (momentary 2 sides)					
	High Inrush 1350 Not W, X or B rocker ON - OFF					
	1353 Not W, X or B rocker ON - OFF Lit					
	High Inrush 1300 ON - OFF					

Approvals and specifications cont..

In house test:
10A 24Vdc—Indicative rating only

 **UL 20A 250Vac 1hp, 125Vac 1/2hp.**
UL 72Vdc 7A, 36Vdc 14A, UL 85°C.

In house test:
20A 24Vdc—Indicative rating only


3mm contact gap except if marked μ

Splash Resistance



1350 High inrush, positive break switching
The 1350 series mechanism ensures contact welds formed at switch-on are positively separated by the plunger tube acting directly on the step in the moving contact.

Dimensions



Panel thickness
G, H 0.75 to 2.5mm

Terminal spacing - Contacts 10.2 between centres
* For cut-out details on momentary switches call sales

Insert Colour	Lamp Voltage	Legend	Legend Colour	Options
Blank	Blank	Blank	Blank	Finish Matt is standard.
R Red	2 125V Neon	602A	B Black	Colour Call sales for custom colours. A full range is available for large orders.
W White	3 250V Neon			Legend printing Select from the examples or call sales for custom legends.
	5 12Vdc LED (P Rocker)			Lamp voltage Call sales for details.
	6 24Vdc LED (P Rocker)			
	7 12V Filament			
	8 24Vdc Filament			

Examples



 C1553AH ---



 C1550AH ---

R13 Round Rocker Switches

10A 250Vac





Key Features

- Miniature round rocker switch
- Ratings up to 10A, 250Vac
- Single & double Contact
- Illuminated & nonilluminated, neon andLED
- Choice of actuators
- Matching indicator
- Panel cut out: 20.2 dia.


Approvals and specifications

- RoHS compliant**
Single Contact has μ contact gap.
- Special products**
Are made to order and can be supplied with a range of body and rocker / lens colours, print & lamp voltage.


Dimensions



Single Contact




Double Contact



Protective cover L188



Examples



R13 112B NAA



R13 112A AAA



R13 112A2 ---

R13 / 112 / A / B / B / 3 / 2 / 602A / W / L188

Series Type Function Body Colour Rocker Colour Insert Colour Lamp Voltage Legend Legend Colour Legend Colour

Product details




1 2
SP ON - OFF μ
Cat no.
R13 112A AAA



1 2 3
SP ON - OFF μ
Lit 230V
Cat no.
R13 112B NAC



1 2
SP ON - OFF μ
Bright colour ON signal
Cat no.
R13 112A2 - -




1 2
SP ON - OFF μ
Cat no.
R13 112A AAB



1 2 3
SP ON - ON μ
Cat no.
R13 112C AAA



1 2 3
SP ON - OFF μ
Lit Window
Cat no.
R13 112B2 - -




1 2 3
SP ON - OFF μ
Lit 230V
Cat no.
R13 112B NAA



1 2 3
SP ON - OFF - ON μ
Cat no.
R13 112D AAA



12 3- 3+
SP ON - OFF μ
Paddle tip has red LED
Cat no.
R13 112LP - -





1 2 3
SP ON - OFF μ
Lit 230V
Cat no.
R13 112B NAB




SP ON - OFF μ
(Momentary ON)
Cat no.
R13 208F AAA*



1 3
Indicator light
Cat no.
R9 92B - - -



DP ON - OFF
Lit 230V
Cat no.
R13 244A AAA



DP ON - OFF
Lit 230V
Cat no.
R13 244B NAA

Well known for their quality and reliability, **Bulgin's toggle switches** are **cost effective** solutions to many existing applications. These switches offer features at an attractive price point often well below that of the existing competition.

- Nylon and Metal switch variants
- Multiple Lever Options
- Ratings up to 20A, 250V ac - 277V ac
- IP67 panel seal versions, supplied complete with gaskets (3900 Series – All Variants)
- Single and double Contact
- Choice of circuit options including 3 position and momentary
- Mounting hole: 12.2mm diameter.
- Sealing accessories available
- Quick Connect, Solder, Screw and PCB Termination Options



3900 Metal Toggle Switches

16A 250Vac - IP67 Sealed Versions



Key Features

- Metal toggle switches
- Ratings up to 20A, 277V ac
- Single and double Contact
- Choice of circuits including 3 position and momentary
- Sealed version supplied complete with gaskets
- Panel seal version to IP67
- 6.3mm terminals
- Guard option

Terminal	Function	Actuator	Body	Options
C 10.5 6.3 x 0.8	Single Contact 3900 ON - OFF 3901 ON - OFF (momentary ON) 3902 ON - OFF (momentary OFF)	A 10.0 Metal toggle finish is nickel plate	A Single Contact Thread: 15/32" x 32TPI E Panel sealed, single Contact Thread: 15/32" x 32TPI A Double Contact, without barrier Thread: 15/32" x 32TPI B Double Contact, with barrier Thread: 15/32" x 32TPI F Panel sealed, double Contact, with terminal barrier Thread: 15/32" x 32TPI G Panel sealed, double Contact, without terminal barrier Thread: 15/32" x 32TPI	Neck Seal M539 Actuator is visible Cover M1080 Covers have internal nylon nuts M1080-2 Covers have internal metal hex nuts Fixing nuts Nickel plated brass are supplied Knurled Front nut Panel thickness 4.0 with backnut Plate P236 Plate SP or DP
S 10.5 Screw & Clamp	3901 ON - OFF (momentary ON) 3902 ON - OFF (momentary OFF) 3910 ON - ON 3911 ON - ON (momentary 1 side)	B 17.5 Metal toggle finish is nickel plate	E Panel sealed, single Contact Thread: 15/32" x 32TPI A Double Contact, without barrier Thread: 15/32" x 32TPI B Double Contact, with barrier Thread: 15/32" x 32TPI F Panel sealed, double Contact, with terminal barrier Thread: 15/32" x 32TPI G Panel sealed, double Contact, without terminal barrier Thread: 15/32" x 32TPI	Covers have internal metal hex nuts Fixing nuts Nickel plated brass are supplied Knurled Front nut Panel thickness 4.0 with backnut Plate P236 Plate SP or DP
T 10.5 0.3 Solder	3910 ON - ON 3911 ON - ON (momentary 1 side) 3920 ON - OFF - ON μ 3921 ON - OFF - ON μ (momentary 1 side) 3922 ON - OFF - ON μ (momentary 2 sides)	D 25.4 Metal toggle finish is nickel plate	A Double Contact, without barrier Thread: 15/32" x 32TPI B Double Contact, with barrier Thread: 15/32" x 32TPI F Panel sealed, double Contact, with terminal barrier Thread: 15/32" x 32TPI G Panel sealed, double Contact, without terminal barrier Thread: 15/32" x 32TPI	Covers have internal metal hex nuts Fixing nuts Nickel plated brass are supplied Knurled Front nut Panel thickness 4.0 with backnut Plate P236 Plate SP or DP
	3950 ON - OFF 3951 ON - OFF (momentary ON) 3952 ON - OFF (momentary OFF) 3960 ON - ON 3961 ON - ON (momentary 1 side) 3970 ON - OFF - ON μ 3971 ON - OFF - ON μ (momentary 1 side) 3972 ON - OFF - ON μ (momentary 2 sides)	E 38.1 Metal toggle finish is nickel plate	A Double Contact, without barrier Thread: 15/32" x 32TPI B Double Contact, with barrier Thread: 15/32" x 32TPI F Panel sealed, double Contact, with terminal barrier Thread: 15/32" x 32TPI G Panel sealed, double Contact, without terminal barrier Thread: 15/32" x 32TPI	Covers have internal metal hex nuts Fixing nuts Nickel plated brass are supplied Knurled Front nut Panel thickness 4.0 with backnut Plate P236 Plate SP or DP
		F 17.5 Metal toggle finish is nickel plate	A Double Contact, without barrier Thread: 15/32" x 32TPI B Double Contact, with barrier Thread: 15/32" x 32TPI F Panel sealed, double Contact, with terminal barrier Thread: 15/32" x 32TPI G Panel sealed, double Contact, without terminal barrier Thread: 15/32" x 32TPI	Covers have internal metal hex nuts Fixing nuts Nickel plated brass are supplied Knurled Front nut Panel thickness 4.0 with backnut Plate P236 Plate SP or DP

Approvals and specifications

ENEC approval currently pending
16A, 277Vac
1 HP, 250Vac

7A, 72Vdc
14A, 36Vdc

3910, 3901, 3952, 3960, 3961, 3970, 3971, 3972
16A, 277Vac
1 HP, 250Vac
1/2 HP, 125Vac
7A, 72Vdc
14A, 36Vdc

3900, 3950
20A, 277Vac
1 HP, 250Vac
1/2 HP, 125Vac
7A, 72Vdc
14A, 36Vdc

ENEC Ratings
3900, 3901, 3902, 3950, 3952, 3960, 3961
16(4)A 250Vac


3910, 3911, 3920, 3921, 3922, 3951, 3970, 3972
10 4)A 250Vac

Approvals and ratings vary with function.
3mm contact gap except where marked μ .

Dimensions mm) * Indicates ON position (for ON - OFF switches)


Single Contact

(C terminals shown)




Double Contact

(C terminals shown with barrier)



Toggle Switch - sealed version

BE and BF types




Guard TG1-RED



Examples























Key Features

- Nylon toggle switches
- Ratings up to 20A, 250V ac
- Single and double Contact
- Wide choice of terminals
- Choice of circuit options including 3 position
- Flat & round actuator options

Approvals and specifications


- 16(4)A 250Vac T85 (ENEC approval pending)
 - UL 20A 250Vac Non Ind (Single Contact)
 - UL 16A 250Vac Non Ind (Double Contact)
 - UL (2 pos types) 250Vac 1hp, 125Vac 1/2hp
 - UL (3 pos types) 250Vac 1/2hp, 125Vac 1/4hp
 - UL 85°C
 - UL N/A on momentary types
- Selective “A, B, C” and “OFF, A, A+B” circuits at 5 amp also available.
3mm contact gap except where marked μ .

Terminal	Function	Actuator	Body	Options
 C	 Single Contact 1700 ON - OFF 	 H	 O Single Contact Thread: 15/32" x 32TPI Keyway 10.0 12.2	Neck Seal M539  Material - Nitrile (H & R Actuators) Actuator visible
 H	 Double Contact 1750 ON - OFF 	 H	 O Single Contact Thread: 15/32" x 32TPI Keyway 10.0 12.2	Cover M1080  Material - EPDM (R Actuator only)
 K	1710 μ ON - ON 	 R	 O Double Contact Thread: 15/32" x 32TPI Keyway 10.0 19.2 1.5 $\pm$ 0.1 1.0 $\pm$ 0.1 Ø12.2 $\pm$ 0.1	Cover M531  Material - PVC (R Actuator only)
 T	1720 μ ON - OFF - ON 	 R	 O Double Contact Thread: 15/32" x 32TPI Keyway 10.0 19.2 1.5 $\pm$ 0.1 1.0 $\pm$ 0.1 Ø12.2 $\pm$ 0.1	Covers have internal nylon nuts
 X	1721 μ ON - OFF - ON μ (momentary 1 side) 	 R	 O Double Contact Thread: 15/32" x 32TPI Keyway 10.0 19.2 1.5 $\pm$ 0.1 1.0 $\pm$ 0.1 Ø12.2 $\pm$ 0.1	Fixing nuts (Standard is M506 & T92)
 X	1722 ON - OFF - ON μ (momentary 2 sides) 	 R	 O Double Contact Thread: 15/32" x 32TPI Keyway 10.0 19.2 1.5 $\pm$ 0.1 1.0 $\pm$ 0.1 Ø12.2 $\pm$ 0.1	T5 Hex brass M506 Hex nylon 
			Panel hole (all types) Panel thickness (Max) Both nuts - 3.5mm Less backnut - 6.5mm	T92 Knurled brass - slotted 
				M279 Knurled nylon 
				Plate P236 Plate SP or DP 

Dimensions mm) * Indicates ON position (for ON - OFF switches)

Single Contact


(C terminals shown)




Optional
F00232PAAA
plate SP or DP

Double Contact


(C terminals shown)



Without barrier



With barrier



Examples



C1700R - -



C1700H - -



C1760R - -



C1750H - -