


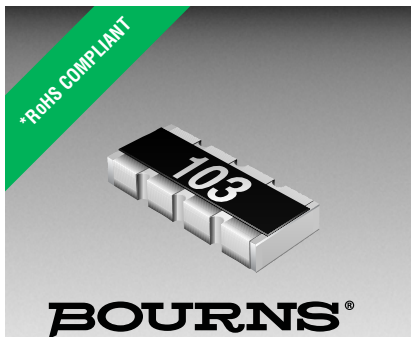

## Features

- RoHS compliant\*
- Convex and concave terminals
- 2, 4 or 8 isolated elements available
- Resistance tolerance  $\pm 1\%$  and  $\pm 5\%$
- Resistance range: 10 ohms to 1 megohm

## CAT/CAY 16 Series - Chip Resistor Arrays

### Specifications

| Requirement             | Characteristics             | Test Method                                                                            |
|-------------------------|-----------------------------|----------------------------------------------------------------------------------------|
| Short Time Overload     | $\pm 2\% + 0.1 \text{ ohm}$ | Rated Voltage X 2.5, 5 seconds                                                         |
| Soldering Heat          | $\pm 2\% + 0.1 \text{ ohm}$ | 260 °C $\pm 5$ °C, 10 seconds $\pm 1$ second                                           |
| Temperature Cycling (5) | $\pm 1\% + 0.1 \text{ ohm}$ | 125 °C (30 minutes) - normal (15 minutes)<br>-55 °C (30 minutes) - normal (15 minutes) |
| Moisture Load Life      | $\pm 3\% + 0.1 \text{ ohm}$ | 1000 hours                                                                             |
| Load Life               | $\pm 3\% + 0.1 \text{ ohm}$ | 1000 hours                                                                             |

### Characteristics

| Characteristics                                                        | CAT16/CAY16                          |
|------------------------------------------------------------------------|--------------------------------------|
| Number of Elements                                                     | 2 (J2), 4 (F4, J4), 8 (F8, J8)       |
| Power Rating Per Resistor                                              | 62 mW (31 mW for CAY16-J8)           |
| Temperature Coefficient of Resistance                                  | $\pm 200 \text{ PPM}/^\circ\text{C}$ |
| Resistance Tolerance                                                   | $\pm 1\%$ , $\pm 5\%$                |
| Resistance Range: E24 (J), E96 + E24 (F)<br>Zero-Ohm Jumper < 0.05 ohm | 10 ohms - 1 megohm                   |
| Max. Working Voltage                                                   | 50 V (25 V for CAY16-J8)             |
| Operating Temp. Range                                                  | -55 °C - 125 °C                      |

### How To Order

**CA Y 16 - 103 J 4 LF**

Chip Arrays

Type

- CAT16 = Concave Terminations
- CAY16 = Convex Terminations

Resistance Code

- 103 = 10 K ohms
- 1003 = 100 K ohms (1 % tolerance)
- 000 = Zero-ohm

Resistance Tolerance

- J =  $\pm 5\%$  (Use "J" for zero-ohm jumper)
- F =  $\pm 1\%$  (4 resistor pkg. and CAT16-F8)


Resistors

- 2 = 2 Isolated Resistors
- 4 = 4 Isolated Resistors
- 8 = 8 Isolated Resistors

Terminations

- LF = Tin-plated (RoHS compliant)

### Soldering Profile for RoHS Compliant Chip Resistors and Arrays

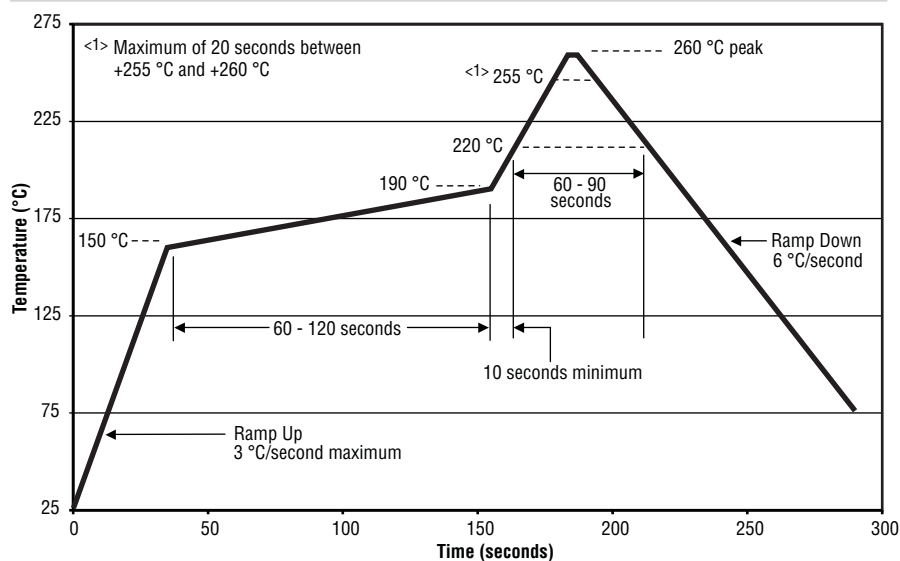


### Packaging Size

J2 ..... 0606 Package Size  
 F4, J4 .... 1206 Package Size  
 F8 ..... 2406 Package Size for CAT16  
 J8 ..... 2406 Package Size for CAT16;  
 1506 Package Size for CAY16


For Standard Values Used in Capacitors, Inductors, and Resistors, [click here](#).

### Schematics


**CAT16-J2  
CAY16-J2**



**CAT16-F4, -J4  
CAY16-F4, -J4**



**CAT16-F8, -J8  
CAY16-J8**



\*RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.

Specifications are subject to change without notice.


The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Users should verify actual device performance in their specific applications.

# CAT/CAY 16 Series - Chip Resistor Arrays

**BOURNS®**


## Derating Curve

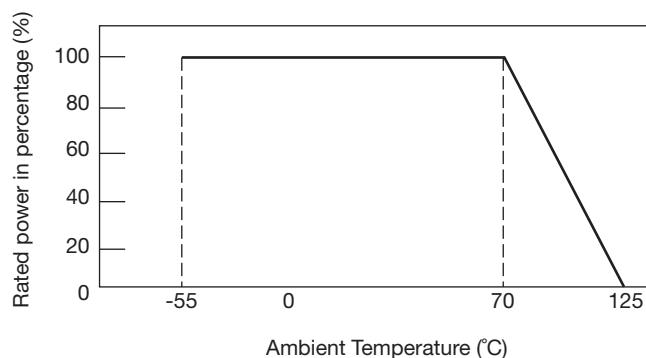

## Dimensions

| Model         | A                                       | A'                                      | B                                       | C                                       | D                                        | E                                                     | F                                       |
|---------------|-----------------------------------------|-----------------------------------------|-----------------------------------------|-----------------------------------------|------------------------------------------|-------------------------------------------------------|-----------------------------------------|
| CAT16-F4      | $\frac{0.40 \pm 0.15}{(.016 \pm .006)}$ | —                                       | $\frac{3.20 \pm 0.20}{(.126 \pm .008)}$ | $\frac{0.80 \pm 0.10}{(.032 \pm .004)}$ | $\frac{1.60 \pm 0.20}{(.063 \pm .008)}$  | $\frac{0.50 \pm 0.10}{(.020 \pm .004)}$               | $\frac{0.30 \pm 0.15}{(.012 \pm .006)}$ |
| CAT16-J4      | $\frac{0.40 \pm 0.15}{(.016 \pm .006)}$ | —                                       | $\frac{3.20 \pm 0.20}{(.126 \pm .008)}$ | $\frac{0.80 \pm 0.10}{(.032 \pm .004)}$ | $\frac{1.55 \pm 0.25}{(.061 \pm .0098)}$ | $\frac{0.50 \pm 0.10}{(.020 \pm .004)}$               | $\frac{0.30 \pm 0.20}{(.012 \pm .008)}$ |
| CAY16-F4, -J4 | $\frac{0.50 \pm 0.15}{(.002 \pm .006)}$ | $\frac{0.70 \pm 0.10}{(.027 \pm .004)}$ | $\frac{3.20 \pm 0.20}{(.126 \pm .008)}$ | $\frac{0.80 \pm 0.05}{(.032 \pm .002)}$ | $\frac{1.60 \pm 0.20}{(.063 \pm .008)}$  | $\frac{0.50 \pm 0.10}{(.020 \pm .004)}$               | $\frac{0.30 \pm 0.20}{(.012 \pm .008)}$ |
| CAT16-J2      | $\frac{0.40 \pm 0.15}{(.016 \pm .006)}$ | —                                       | $\frac{1.60 \pm 0.15}{(.063 \pm .006)}$ | $\frac{0.80 \pm 0.05}{(.032 \pm .002)}$ | $\frac{1.60 \pm 0.15}{(.063 \pm .006)}$  | $\frac{0.60 \pm 0.15}{(.024 \pm .006)}$               | $\frac{0.30 \pm 0.20}{(.012 \pm .008)}$ |
| CAY16-J2      | —                                       | $\frac{0.60 \pm 0.15}{(.024 \pm .006)}$ | $\frac{1.60 \pm 0.15}{(.063 \pm .006)}$ | $\frac{0.76 \pm 0.10}{(.030 \pm .004)}$ | $\frac{1.60 \pm 0.15}{(.063 \pm .006)}$  | $\frac{0.45 \pm 0.15/-0.10}{(.018 \pm 0.006/-0.004)}$ | $\frac{0.30 \pm 0.20}{(.012 \pm .008)}$ |
| CAT16-F8, -J8 | $\frac{0.40 \pm 0.15}{(.016 \pm .006)}$ | —                                       | $\frac{6.40 \pm 0.20}{(.252 \pm .008)}$ | $\frac{0.80 \pm 0.15}{(.032 \pm .006)}$ | $\frac{1.60 \pm 0.20}{(.063 \pm .008)}$  | $\frac{0.60 \pm 0.15}{(.024 \pm .006)}$               | $\frac{0.30 \pm 0.20}{(.012 \pm .008)}$ |
| CAY16-J8      | $\frac{0.30 \pm 0.15}{(.012 \pm .006)}$ | $\frac{0.30 \pm 0.15}{(.012 \pm .006)}$ | $\frac{3.80 \pm 0.20}{(.15 \pm .008)}$  | $\frac{0.50 \pm 0.05}{(.02 \pm .002)}$  | $\frac{1.60 \pm 0.20}{(.063 \pm .008)}$  | $\frac{0.50 \pm 0.10}{(.02 \pm .004)}$                | $\frac{0.30 \pm 0.15}{(.012 \pm .006)}$ |

## Configurations

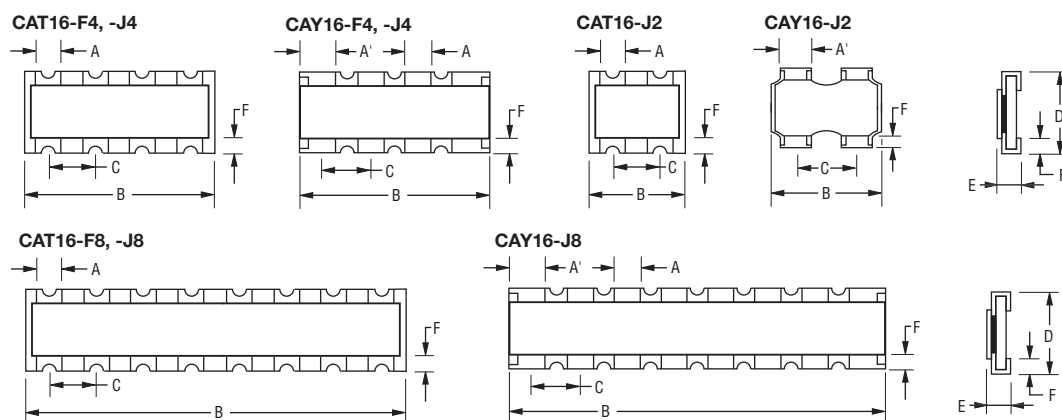

DIMENSIONS:  $\frac{\text{MM}}{(\text{INCHES})}$


Specifications are subject to change without notice.  
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.  
Users should verify actual device performance in their specific applications.

# CAT/CAY 16 Series - Chip Resistor Arrays


**BOURNS®**

## Land Patterns


CAT16-F4, -J4, -F8, -J8




CAY16-F4, -J4, -J8

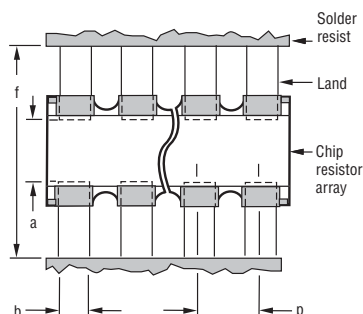

CAT16-J2





CAY16-J2



| Model                   | a                                                     | b                                                       | p                     | f                                                     |
|-------------------------|-------------------------------------------------------|---------------------------------------------------------|-----------------------|-------------------------------------------------------|
| CAT16-F4, -J4, -F8, -J8 | $\frac{0.7 \text{ to } 0.9}{(.028 \text{ to } .035)}$ | $\frac{0.4 \text{ to } 0.45}{(.016 \text{ to } .0178)}$ | $\frac{0.80}{(.032)}$ | $\frac{2.2 \text{ to } 2.6}{(.087 \text{ to } .102)}$ |
| CAY16-F4, -J4           | $\frac{0.7 \text{ to } 0.9}{(.028 \text{ to } .035)}$ | $\frac{0.4 \text{ to } 0.45}{(.016 \text{ to } .0178)}$ | $\frac{0.80}{(.032)}$ | $\frac{2.4 \text{ to } 2.8}{(.094 \text{ to } .11)}$  |
| CAY16-J8                | $\frac{0.7 \text{ to } 0.9}{(.028 \text{ to } .035)}$ | $\frac{0.3 \text{ to } 0.35}{(.012 \text{ to } .014)}$  | $\frac{0.50}{(.020)}$ | $\frac{2.0 \text{ to } 2.2}{(.079 \text{ to } .087)}$ |
| CAT16-J2                | $\frac{0.7 \text{ to } 0.9}{(.028 \text{ to } .035)}$ | $\frac{0.4 \text{ to } 0.45}{(.016 \text{ to } .0178)}$ | $\frac{0.80}{(.032)}$ | $\frac{2.2 \text{ to } 2.6}{(.087 \text{ to } .102)}$ |
| CAY16-J2                | $\frac{0.7 \text{ to } 0.9}{(.028 \text{ to } .035)}$ | $\frac{0.4 \text{ to } 0.5}{(.016 \text{ to } .020)}$   | $\frac{0.80}{(.032)}$ | $\frac{2.0 \text{ to } 2.6}{(.079 \text{ to } .102)}$ |

## Packaging Dimensions

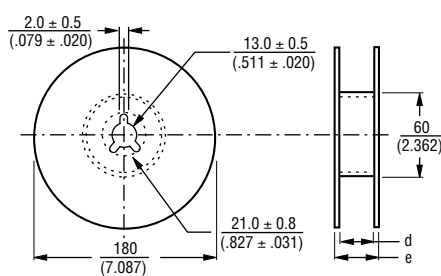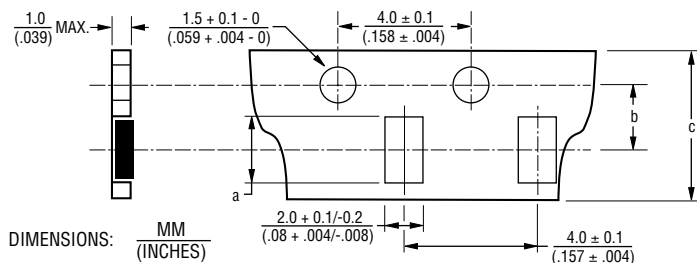

| Model                        | a                                       | b                                       | c                                      | d                                      | e                                      |
|------------------------------|-----------------------------------------|-----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|
| CAT16-F4, -J4 & CAY16-F4, J4 | $\frac{3.60 \pm 0.20}{(.142 \pm .008)}$ | $\frac{3.50 \pm .005}{(.138 \pm .004)}$ | $\frac{8.0 \pm 0.3}{(.315 \pm .012)}$  | $\frac{9.0 \pm 0.3}{(.354 \pm .012)}$  | $\frac{11.4 \pm 1.0}{(.449 \pm .040)}$ |
| CAT16-J2 & CAY16-J2          | $\frac{1.80 \pm 0.10}{(.070 \pm .004)}$ | $\frac{3.50 \pm .005}{(.138 \pm .004)}$ | $\frac{8.0 \pm 0.3}{(.315 \pm .012)}$  | $\frac{9.0 \pm 0.3}{(.354 \pm .012)}$  | $\frac{11.4 \pm 1.0}{(.449 \pm .040)}$ |
| CAT16-F8, -J8                | $\frac{6.90 \pm 0.20}{(.272 \pm .008)}$ | $\frac{5.50 \pm 0.10}{(.217 \pm .004)}$ | $\frac{12.0 \pm 0.2}{(.472 \pm .008)}$ | $\frac{13.0 \pm 0.2}{(.512 \pm .008)}$ | $\frac{15.4 \pm 1.0}{(.606 \pm .040)}$ |
| CAY16-J8                     | $\frac{4.10 \pm 0.15}{(.161 \pm .012)}$ | $\frac{3.50 \pm 0.05}{(.138 \pm .002)}$ | $\frac{8.0 \pm 0.3}{(.315 \pm .012)}$  | $\frac{9.0 \pm 0.3}{(.354 \pm .012)}$  | $\frac{11.4 \pm 1.0}{(.449 \pm .040)}$ |

- 5,000 pcs. per reel (J2, J4, CAY16-J8)
- 4,000 pcs. per reel (CAT16-F8, -J8)
- Paper tape

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

REV. 09/14

Specifications are subject to change without notice.