


| 5   |                | 6          |      | 7                  |  | 8 |  |
|-----|----------------|------------|------|--------------------|--|---|--|
| REV | ECN NO.        | DATE       | SIGN | DESCRIPTION        |  |   |  |
| B   | LEN-8B0112~115 | 2008/09/25 | Shin | Add Note           |  |   |  |
| C   | LEN1630275~278 | 2016/03/02 | Ruru | Change Logo & Note |  |   |  |
|     |                |            |      |                    |  |   |  |

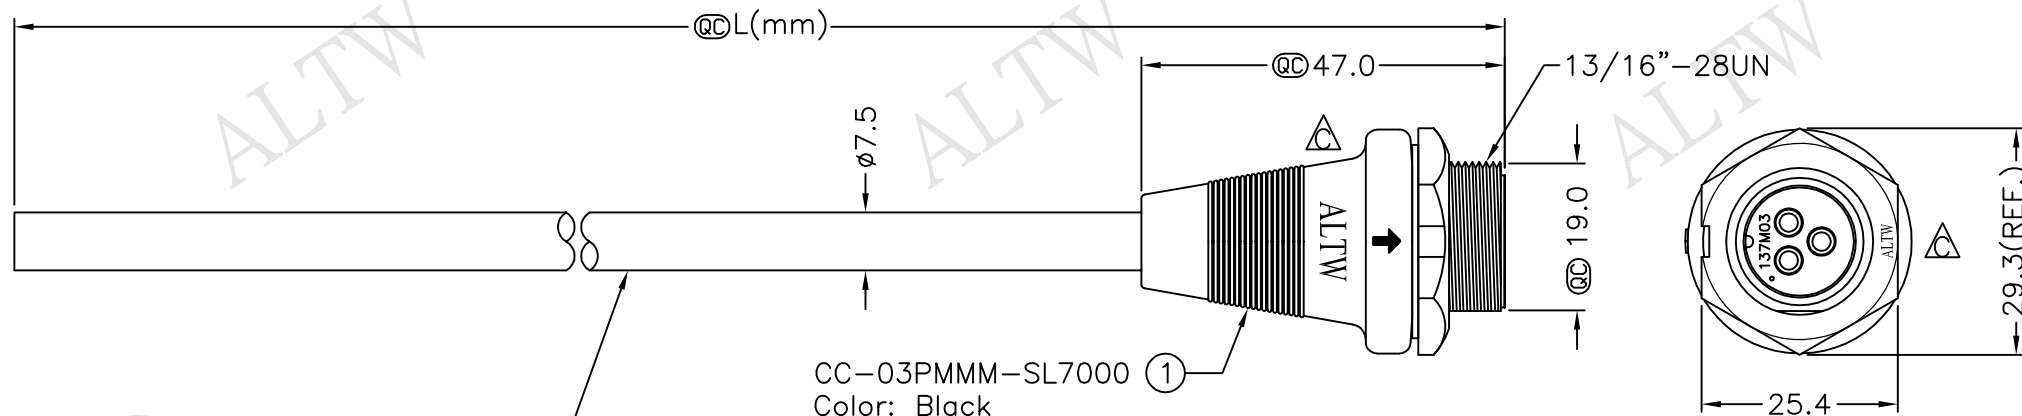

Note:

- \* @C Important Dimension.
- \* Waterproof Rate: IP67
- \* Housing: Nylon+GF, Black
- \* Male Pin: Copper Alloy, Gold Plated
- \* Gasket: EPDM, Black
- \* Nut: Nylon+GF, Black
- \* Cable: UL2464 16AWG\*3C+Drain+Al/My  
(UV Resistant)OD=7.5mm

\* Use with waterproof cap or dust cap

Panel Thickness Max: 1.2mm

\* Use without waterproof cap or dust cap

Panel Thickness Max: 2.0mm



 Cable Length Tolerance: 01M:  $\pm 40\text{mm}$

02M~05M:  $\pm 60\text{mm}$

06M~10M:  $\pm 100\text{mm}$

11M~30M:  $\pm 200\text{mm}$

31M~99M:  $\pm 500\text{mm}$



|       |            |   |
|-------|------------|---|
| 3     | Black      | 黑 |
| 2     | Blue       | 藍 |
| 1     | Brown      | 棕 |
| Conn. | Wire Color |   |
|       | Pin Out    |   |

Recommended  
Panel Cut-Out

# Amphenol LTW

安費諾亮泰企業股份有限公司

|                  |             |            |
|------------------|-------------|------------|
| ITEM NO          | DRAWN BY    | DATE       |
|                  | Ruru        | 2016/03/02 |
| DWG NO           | CHECKED BY  | DATE       |
| CC-03PMMM-SL7AXX | Rita        | 2016/03/02 |
| CUSTOMER         | APPROVED BY | DATE       |
| ALTW             | Lisa        | 2016/03/02 |

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTM. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTM.