


NOTES:

- 1 BRAID TERMINATION RING (RAYCHEM PART NUMBER TR04A1) IS SUPPLIED LOOSE WITH ADAPTER. RING IS DESIGNED TO BE INSTALLED BY RESISTIVE ELECTRICAL HEATING AND IS MARKED WITH THERMOCHROMIC PAINT WHICH CHANGES COLOR WHEN INSTALLATION TEMPERATURE IS REACHED.
- 2. TEMPERATURE RATING FOR ALUMINUM ALLOY IS -65° TO +150°C.
- 3. PART SHALL BE PERMANENTLY MARKED WITH PART NUMBER PER MIL-STD-130.
- 4. PLATING IS CADMIUM PER QQ-P-416 TYPE II CLASS 3 OVER ELECTROLESS NICKEL PER MIL-C-26074 CLASS 3 OR 4 GRADE B (500 HOUR SALT SPRAY RESISTANT FINISH).
- 6. ALL CORNERS SHALL BE ROUNDED.
- 7. THIS PART IS DESIGNED TO TERMINATE A BRAIDED CABLE SHIELD AND A HEAT SHRINKABLE BOOT TO A CONNECTOR.
- 8 RING SHALL NOT BE MARKED.
- 9 PART MATES WITH CONNECTOR MS3456W10S-25.

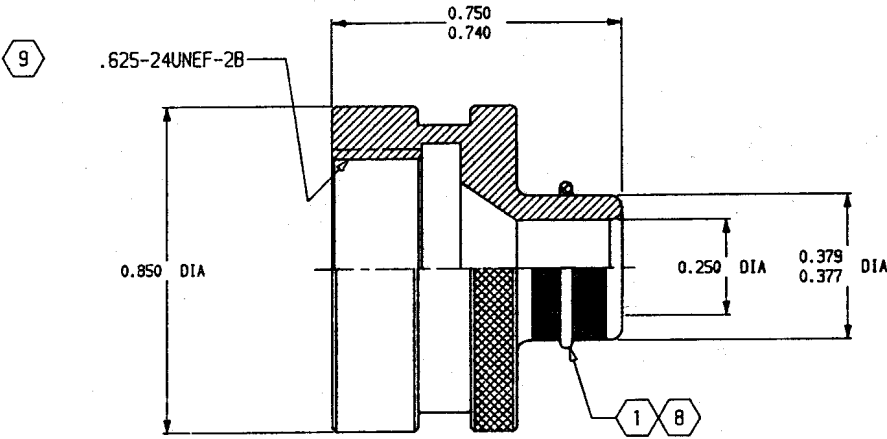

If this document is printed it becomes uncontrolled.
Check with the web for latest revision.

THIS DRAWING AND THE INFORMATION SET FORTH HEREON ARE THE PROPERTY OF RAYCHEM CORPORATION AND ARE TO BE HELD IN TRUST AND CONFIDENCE. PUBLICATION, DUPLICATION, DISCLOSURE, OR USE FOR ANY PURPOSE NOT EXPRESSLY AUTHORIZED IN WRITING BY RAYCHEM CORPORATION IS PROHIBITED.

MECHANICAL PROPERTIES		PMIC		UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES		CONTRACT NUMBER		RAYCHEM CORPORATION 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025	
YP				TOLERANCES ON		CONTRACTOR		ADAPTER, SHIELD TERMINATION	
TS				2 PLACE 3 PLACE		DRAWN BY			
EL2				± ± 0.005		K. T.		DATE (YR-MO-DA) 89-03-02	
RA				THIRD ANGLE PROJECTION		CHECKER		ENGINEER	
SH				DO NOT SCALE THIS DRAWING		DRAWING APPROVAL		W.C. GAY 3-3-89	
RH				RATL ENGR		DESIGN APPROVAL			
NEXT ASSY		USED ON		APPLICATION		SIZE		CAGE CODE	
						C		06090	
						SCALE		NONE	
						DWS. NO.		SCD-CH09-0823-001	
						SHEET		-	