



4

3

2


1

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW DRAWING	16JAN2016	NK	RH

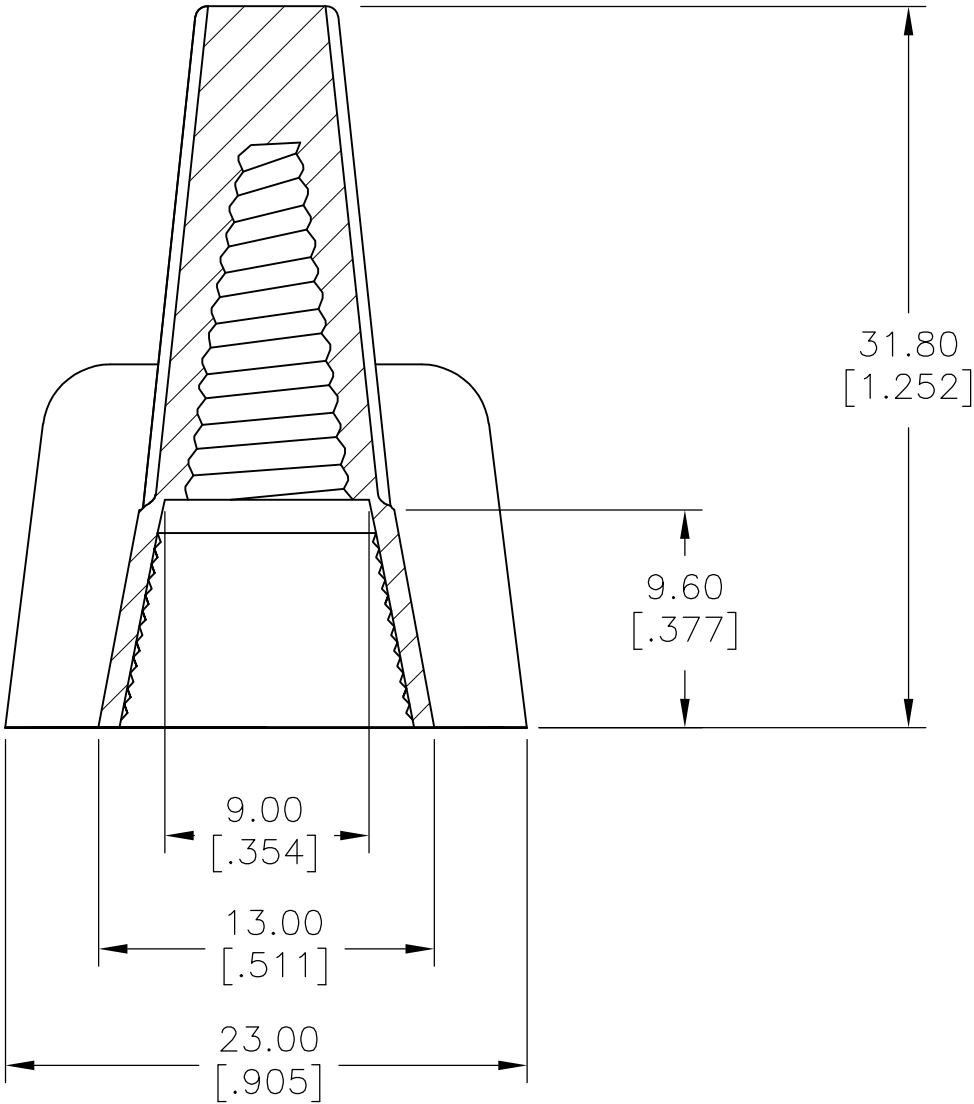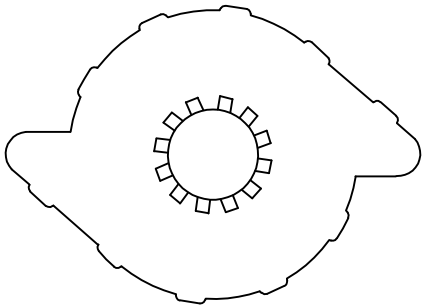

- 1
- WORKING TEMPERATURE: 105° C
- 2
- VOLTAGE: 300/600V MAX
- 3
- COLOR: RED
- 4
- WIRE RANGE: #18-#8 AWG MAX.5#12
SOL MIN. 3#16
- 5
- SPRING INSERT: STEEL

2299507-1 AS SHOWN

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN NAGALAKSHMI K	16JAN2016	 TE Connectivity			
		CHK HILL RYAN	16JAN2016				
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD HILL RYAN	16JAN2016	NAME			
	0 PLC ± -	PRODUCT SPEC	CPGI-WC-WNG-RD-BULK				
	1 PLC ± 0.2[.007]	—					
	2 PLC ± 0.4[.015]	APPLICATION SPEC					
	3 PLC ± -	—	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
	4 PLC ± -	—	A3	00779	C-2299507	—	
	ANGLES ± -	WEIGHT —					
MATERIAL TOUGH THERMOPLASTIC UL 94V-2 FLAME-RETARDANT	FINISH —	CUSTOMER DRAWING			SCALE 3:1	SHEET 1 OF 1	REV A