

CSLA

Automotive grade current sense resistor long electrode- metal foil



Product features

- AEC-Q200
- Resistance value from 1 mΩ to 25 mΩ
- Low thermal EMF
- Low TCR
- 1206 (3216 metric) package
- Moisture sensitivity level (MSL): 1


Applications

- Automotive lighting
- Server
- Battery management
- Hot swap controllers
- Body control modules
- DC/DC converters
- Switched-mode power supplies (SMPS)
- DC Motor control
- IoT devices
- Electric water pump
- Active braking


Environmental compliance




Table 1. Part numbering

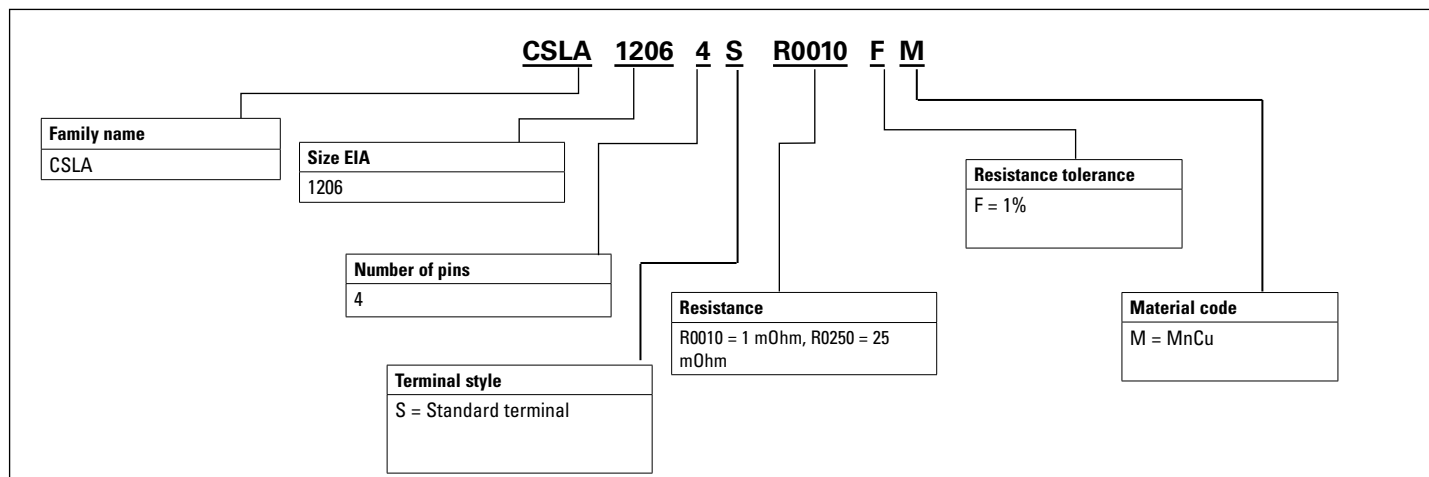

Mechanical parameters- mm

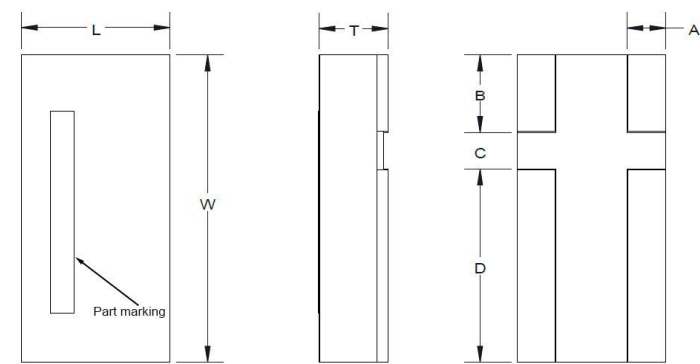


Construction



Number	Materials
1	Alumina ceramic
2	Epoxy
3	Cu-alloy
4	Protective coating
5	Terminal electrode copper - nickel - matte tin
6	Marking
7	Coating

Family	Size code	W	L	A	B	C	D	T
CSLA1206	1206 (3216 metric)	3.20 ± 0.20	1.55 ± 0.20	0.41 ± 0.20	0.46 ± 0.20	0.50 ± 0.20	2.16 ± 0.20	0.50 ± 0.20

Recommended PCB layout- mm

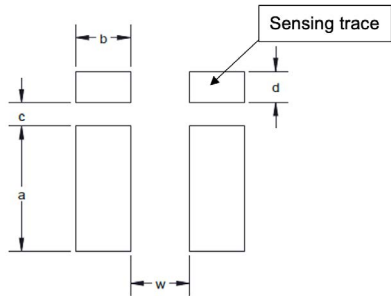

Family	a	b	c	d	w
CSLA1206	2.29	1.014	0.381	0.762	0.762

Electrical specifications

Part number	Size	Power rating @ +125 °C (W)	Resistance ² (mΩ)	Resistance tolerance	Material	TCR ¹ (ppm/°C)	Operating temperature
CSLA12064SR0010FM	1206 (3216 metric)	1	1	±1%	MnCu	±100	-55 °C to +170 °C
CSLA12064SR0020FM	1206 (3216 metric)	1	2	±1%	MnCu	±100	-55 °C to +170 °C
CSLA12064SR0030FM	1206 (3216 metric)	1	3	±1%	MnCu	±100	-55 °C to +170 °C
CSLA12064SR0050FM	1206 (3216 metric)	1	5	±1%	MnCu	±100	-55 °C to +170 °C
CSLA12064SR0100FM	1206 (3216 metric)	1	10	±1%	MnCu	±100	-55 °C to +170 °C
CSLA12064SR0150FM	1206 (3216 metric)	1	15	±1%	MnCu	±100	-55 °C to +170 °C
CSLA12064SR0200FM	1206 (3216 metric)	1	20	±1%	MnCu	±100	-55 °C to +170 °C
CSLA12064SR0250FM	1206 (3216 metric)	1	25	±1%	MnCu	±100	-55 °C to +170 °C


1. Temperature coefficient of resistance (TCR) parameters: +25 °C to +125 °C

2. Resistance should be measured at +23 °C ±5 °C in accordance with the recommended land pattern.

Packaging information- mm


Supplied in tape and reel on a 7.0" diameter reel

Tape carrier and dimensions

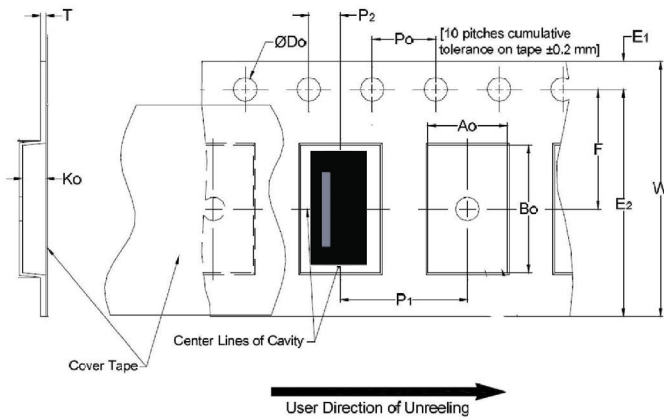

Dimension	CSLA
W	8.00 ± 0.30
F	3.50 ± 0.10
E1	1.75 ± 0.10
E2	NA
P0	4.00 ± 0.10
P1	4.00 ± 0.10
P2	2.00 ± 0.05
ØD0	1.50 ± 0.10
A0	1.90 ± 0.20
B0	3.50 ± 0.20
K0	0.85 ± 0.20
T	0.20 ± 0.10

Reel dimensions

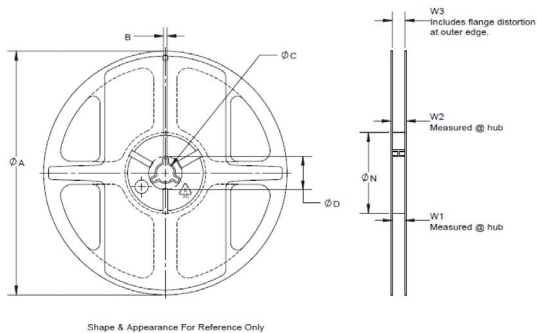


Size	A	B	C	D	N	W1	W2	W3
CSLA1206	178 ± 2.0	2.0 ± 0.5	13.0 ± 1.0	20.2 minimum	58 ± 2.0	9.5 ± 1.0	14.4 maximum	NA

General specifications

Temperature coefficient of resistance: MIL-STD-202, Method 304, $TCR = (R-R_0)/R_0(T_2-T_1) \times 10^6$. Test temperature: $T_1 = +25\text{ }^{\circ}\text{C}$, $T_2 = +125\text{ }^{\circ}\text{C}$
Short time overload: IEC60115-1 4.13, 2.5 X rated power for 5 s
High temperature storage: MIL-STD202 Method 108, 1000 hours, $+170\text{ }^{\circ}\text{C}$, unpowered
Temperature cycling: JESD22 Method JA-104, 1000 Cycles ($-55\text{ }^{\circ}\text{C}$ to $+150\text{ }^{\circ}\text{C}$)
Biased humidity: MIL-STD-202 Method 103, 1000 hours, $+85\text{ }^{\circ}\text{C}/85\%$ RH, at rated power
Operational life: MIL-STD-202 Method 108, 1000 hours, $+125\text{ }^{\circ}\text{C} \pm 2\text{ }^{\circ}\text{C}$ at rated power, 1.5 hours on, 0.5 hours off.
Resistance to solvents: MIL-STD-202 Method 215, Immersed in three solvents after 3 to 3.5 minutes immersion, brush wipe 10 times, a total of 3 times, washing with washing and cleaning agent, room temperature on the surface of the ventilation drying.
Mechanical shock: MIL-STD-202 Method 213, 100 g's. 6 ms, 5 pulses
Vibration: MIL-STD-202 Method 204, 10 Hz to 2000 Hz, 5 g's for 20 min., 12 cycles each of 3 orientations
Resistance to soldering heat: MIL-STD-202 Method 210, Immerse the specimens in and eutectic solder at $+260 \pm 5\text{ }^{\circ}\text{C}$ for $10 \pm 1\text{ s}$
ESD: AEC-Q200-002 or ISO/DIS 10605, 25 kV
Solderability: J-STD-002, solder bath at $245 \pm 5\text{ }^{\circ}\text{C}$, Dipping time: 3 ± 0.3 seconds, > 95% area covered with tin
Flammability: UL-94, V-0 or V-1 are acceptable. Electrical test not required.
Board flex (bending): AEC-Q200-005, Bending width 2 mm, PCB thickness 1.6 mm, Fulcrums distance 90 mm
Terminal strength: AEC-Q200-006, Force of 17.7 N for 60 seconds

Temperature derating curve

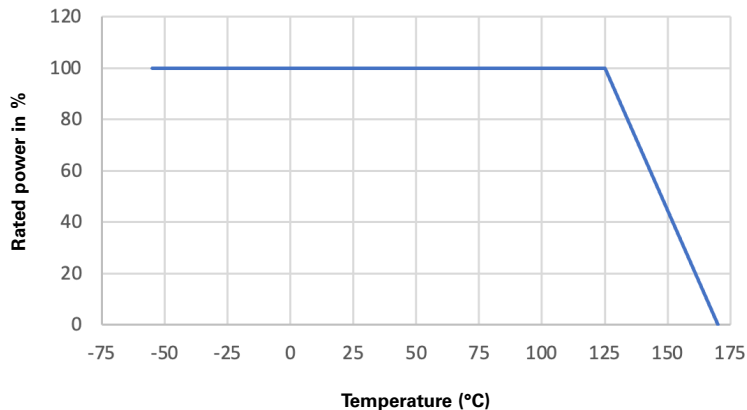

Rated current & voltage

The rated Current and Voltage are calculated by the following formula:

$$I = \sqrt{P \div R}$$

I: Rated current (A)

P: Rated power (W)


$$V = \sqrt{P \times R}$$

V: Rated voltage (V)


R: Resistance value (Ω)


Curves

Maximum pulse power

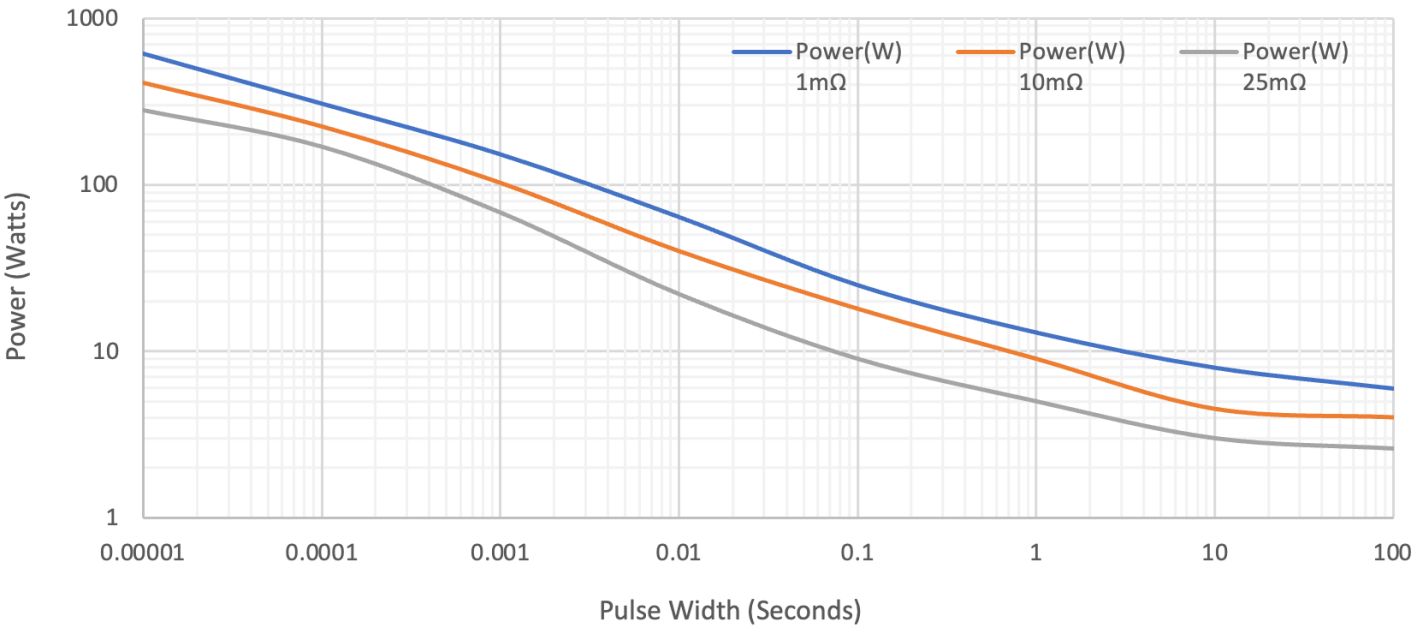

Maximum pulse energy

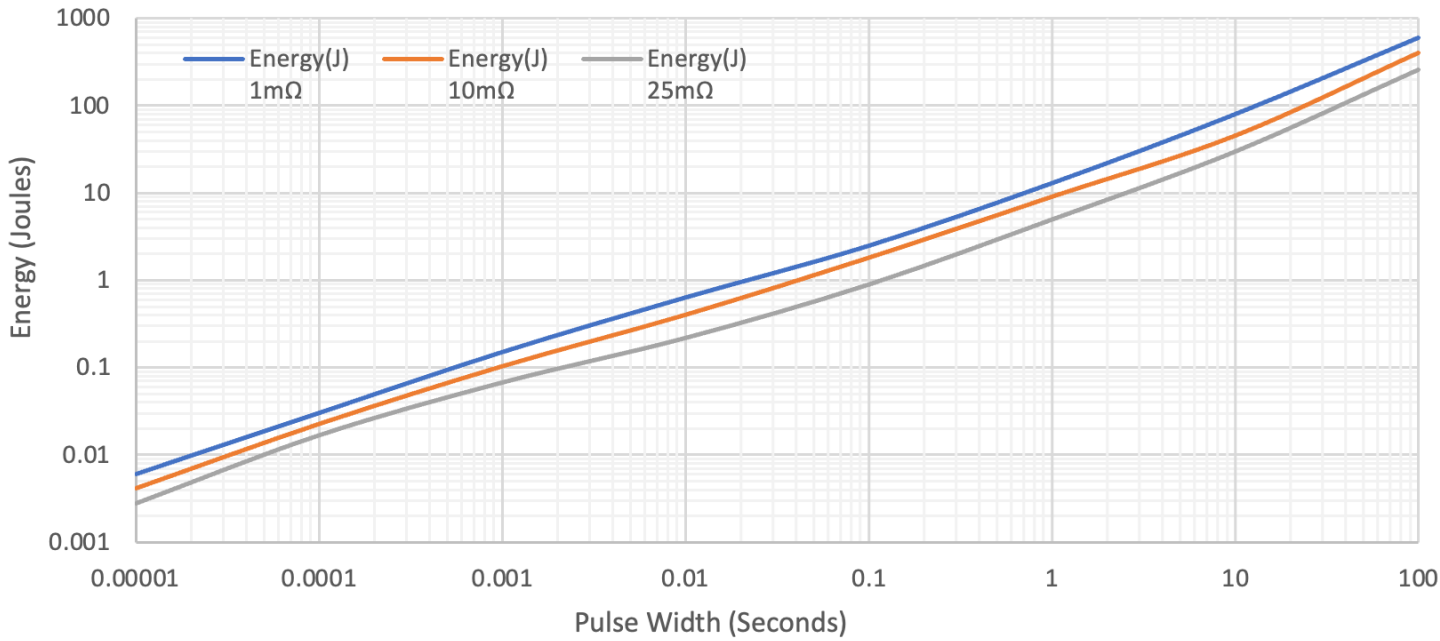

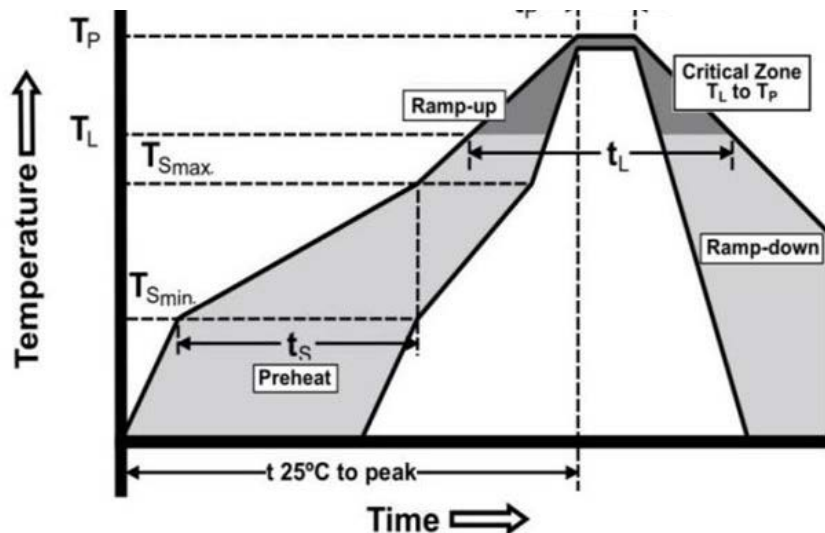

Profile feature	Lead (Pb) free solder
Preheat and soak	<ul style="list-style-type: none"> • Temperature min. (T_{smin}) • Temperature max. (T_{smax}) • Time (T_{smin} to T_{smax}) (t_s)
Ramp up rate T_{smax} to T_p	3 °C/ second max.
Melting tin time (t_L)	20 s - 30 s
Peak package body temperature (T_p)*	260 °C
Time (t_p)* within 5 °C of the specified classification temperature (T_C)	5 seconds
Ramp-down rate (T_p to T_L)	6 °C/ second max.
Time 25 °C to peak temperature	8 minutes max.

Manual solder

+350 °C $\pm$ 10 °C , 5 seconds maximum (by soldering iron), generally manual, hand soldering is not recommended

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com/electronics

© 2023 Eaton
All Rights Reserved
Printed in USA
Publication No. ELX1371 BU22239
August 2023

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

