

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1390050	2013-08-28	Micky	Add Certification Information





Laser Mark:
 YYYY = Year
 WW = Week


4 Unlock Tool
 Part number: ULT-JOIN01

Cable Joiner Housing Part Number
 CX-00B0M32-700X

M32x1.0

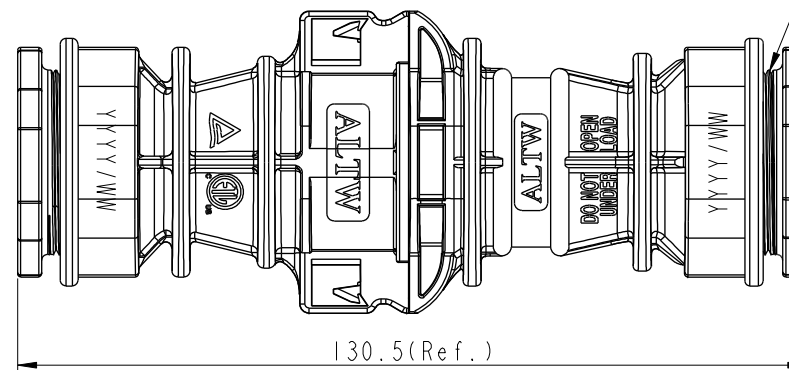


* Recommended sealing Nut torque
 Minimum: 25Kgf-cm



Note:
 * Waterproof Rate: IP67
 * Connector: PPE,Black(UL94-V0 FI)
 * Butt Pin: Copper alloy
 * Gasket: Silicon,Gray
 * Disassembly-Using the Unlock tool.
 * Operating Temperature : -40~+105°C
 * Withstanding Voltage : 6KV
 * Pollution Degree : III
 * Cable OD Range: 12mm~10mm
 * Avoid oil and gasoline

* CX-00B0M32-700X
 UL 6703A & TUV 2pfg 1915

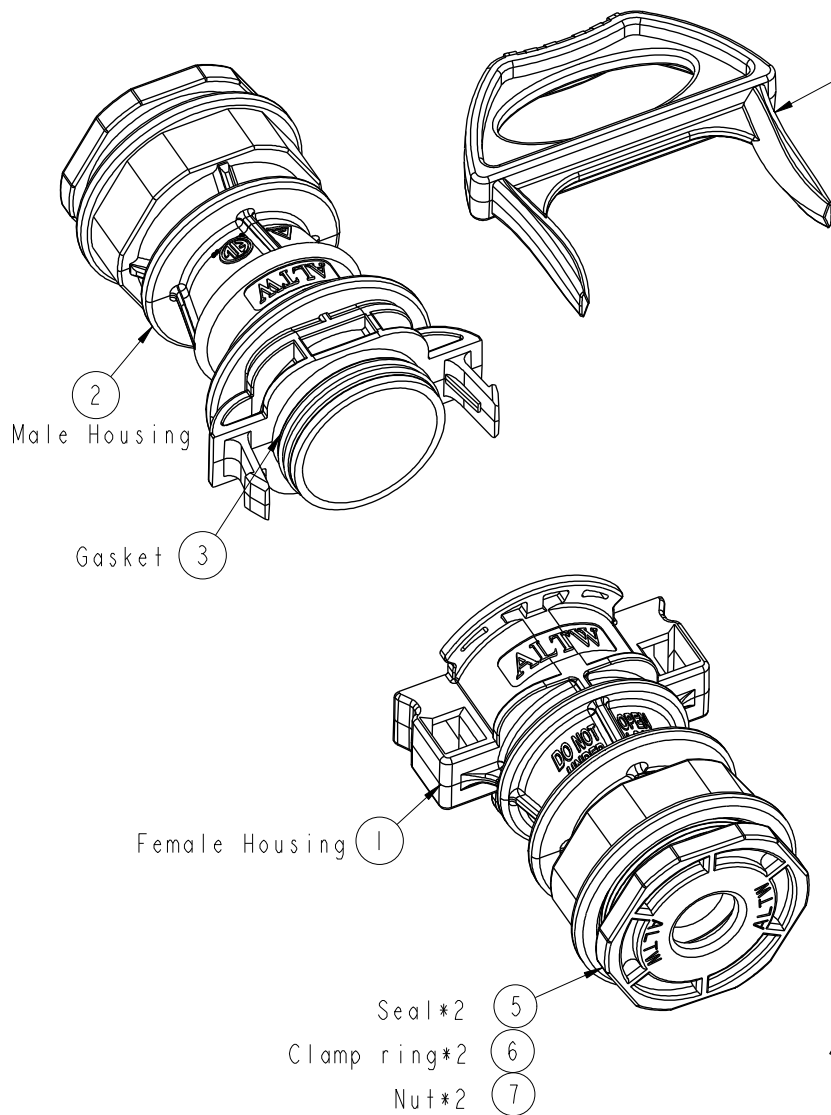

UNIT:mm				TITLE Cable joiner Cable OD Range: 12mm~10mm		ITEM NO	DRAWN BY	DATE
TOLERANCE .X ±0.50		SCALE 4:5	SIZE A4	SHEET 1	OF 1	DWG NO CX-00B0M32-7002	Checked BY Benson	DATE 2013-08-28
REV. B		WC-REV. B.1	QC: Inspection item		CUSTOMER ALTW		APPROVED BY Victor	DATE 2013-08-28

Amphenol LTW
 安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.