

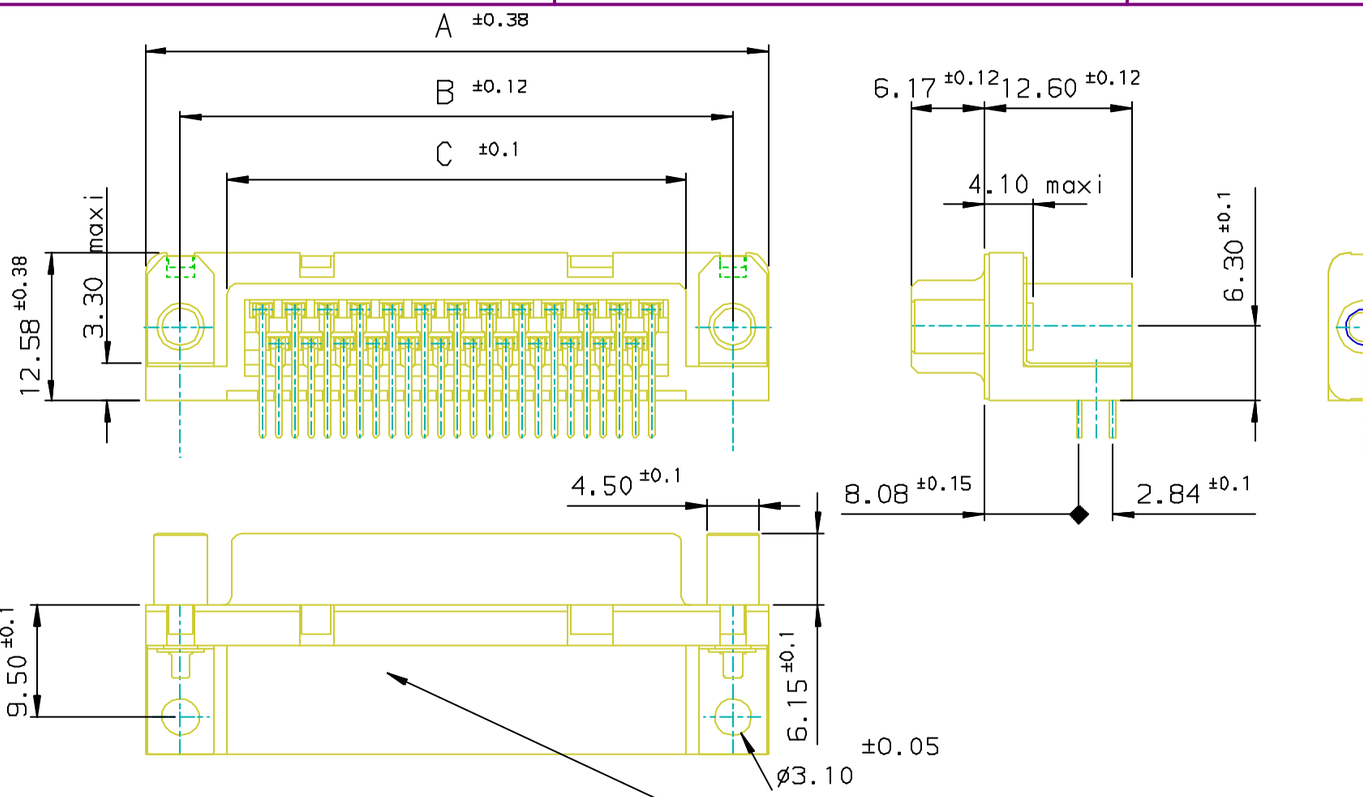


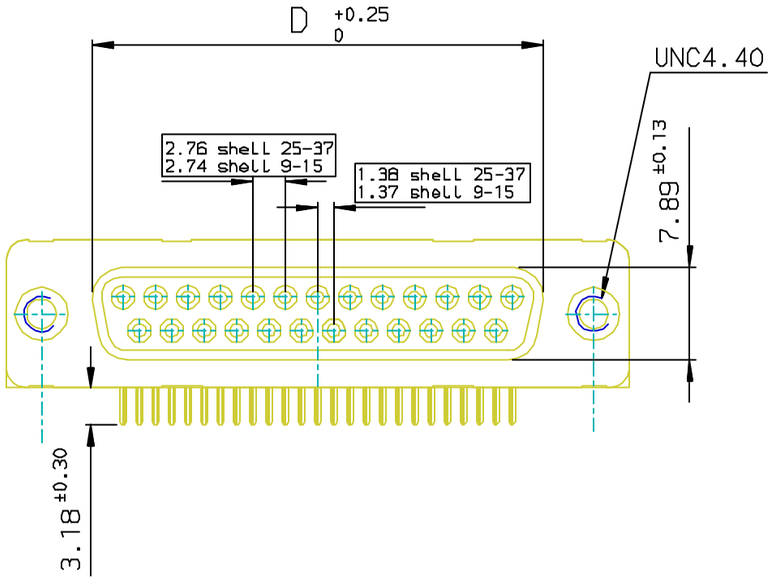

PC card drilling dimensions(after plating)

(thickness 1.60±0.20mm)

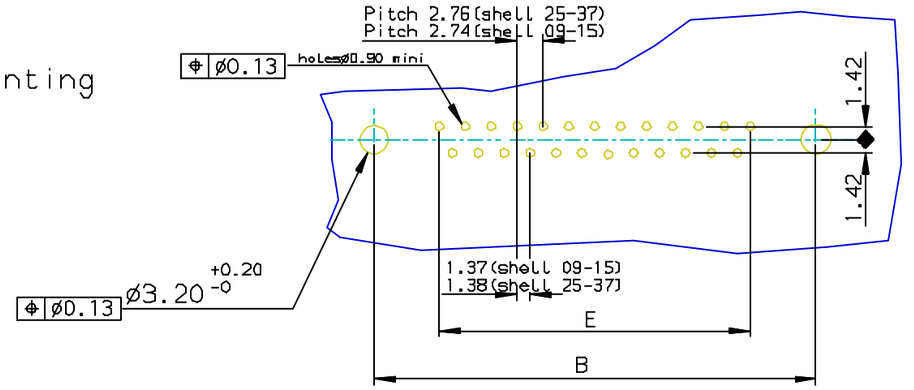

SHELL	A±0.38	B±0.12	C±0.10	D±0.25 0	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.21	10.96	D09S33E6UV00**
15	39.14	33.32	25.18	24.54	19.18	D15S33E6UV00**
25	53.03	47.04	39.12	38.25	33.12	D25S33E6UV00**
37	69.32	63.50	55.68	54.71	49.68	D37S33E6UV00**

LF FOR LEAD FREE

REQUIREMENTS

Technical characteristics:

Shell:steel tin/Zinc Cr3 plated

Insulators:self-extinguishing black polyster,ULclass94V0

Contacts size 20:phosphor bronze,gold 0.76µ on mating end,bright tin on termination end over nickel on entire contact

Cycles > 500 .

Metal plate for electrical continuity:brass,tin/Zinc Cr3 plated

Screwlock:brass,tin/Zinc Cr3 plated

Electrical characteristics:

max.current rating:5A

Test voltage:1000V

Rated voltage:300V

Contact resistance:≤15mΩ

Shell resistance:≤5mΩ

Insulation resistance:≥5000MΩ

Climatic characteristics:

Operating temperature range:-55°c +125°c

Dimensions:

in accordance with MIL-C-24308

FOR ROHS DETAILS REFER DWG.NO:C01-8646-0000

European Views

rev	ecn no	dr	date
B	105-0124	JS	2005/07/27
C	106-0074	SK	2006/06/08
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–

www.fciconnect.com

surface ISO 1302 | tolerance std ISO 406 ISO 1101

TOLERANCES UNLESS OTHERWISE SPECIFIED

projection | mm

Dr	JOHN SLEEBA	1993/04/07	ANGULAR	LINEAR	0.X ±0.1
Eng	GEORGE VJ	1993/04/07			0.XX ±0.1
Chr	GEORGE VJ	2005/07/27	0.XX° ±1°		0.XXX ±0.1
Appr	KVSD	2005/07/27	Product family		D-SUB

size A3 | Scale 1:1

ECN –

Spec ref –

title: SOCKET CONNECT.DELTA D right angle screwlock & metal plate

dwg no: C-8646-0149

Rev. C

catalog no DELTA-D | CUSTOMER | sheet 1 of 1

REV F - 2006-04-17

Copyright FCI.