

D369-HR33-NP0

✓ ACTIVE

DEUTSCH | DEUTSCH 369

TE Internal #: YD369-HR33-NP00000

3 Position, Receptacle, Connector Assembly, Crimp, Wire-to-Wire,
Gold (Au), Normal, 2.54 mm [.1 in] Centerline, 1 Row, 400 VAC,
Sealable, DEUTSCH 369

[View on TE.com >](#)



Connectors > Rectangular Connectors > Standard Rectangular Connectors > Rectangular Connectors: 3-Way Receptacle



Connector Product Type: **Connector Assembly**

Connector & Housing Type: **Receptacle**

Mating Alignment: **With**

Mating Alignment Type: **Keyed**

Mating Retention: **With**

[All Rectangular Connectors: 3-Way Receptacle \(30\)](#)

Features

Product Type Features

Connector Seal & Plug Type	Triple-Seal
Connector Shell Size	03
Connector Product Type	Connector Assembly
Connector & Housing Type	Receptacle
Connector System	Wire-to-Wire
Insertion Force Type	Normal
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Columns	3
Number of Cavities	3
Contacts Preloaded	Yes
Number of Positions	3
Number of Rows	1
Number of Power Positions	3
Number of Signal Positions	3



Electrical Characteristics

Operating Voltage	500 VDC
-------------------	---------

Body Features

Connector & Keying Code	N
Connector Seal Color	Natural
Seal Material	Fluorosilicone
Seal Type	Grommet Seal, Interfacial Seal
Primary Product Color	Black
Cable Exit Angle	180°

Contact Features

Contact Size	Size 22
Contact Mating Area Plating Material	Gold (Au)
Contact Retention Within Housing	With
Contact Current Rating (Max)	5 A
Contact Type	Pin
Wire Contact Termination Area Plating Material	Gold

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

Mating Alignment	With
Mating Alignment Type	Keyed
Mating Retention	With
Mating Retention Type	Button Latch

Housing Features

Shell Material	Composite
Centerline (Pitch)	2.54 mm[.1 in]
Housing Material	Composite

Dimensions

Row-to-Row Spacing	2.54 mm[.1 in]
Compatible Insulation Diameter Range	.71 – 1.37 mm[.028 – .054 in]

Usage Conditions

Operating Temperature Range	-55 – 175 °C[-67 – 347 °F]
-----------------------------	----------------------------



Operation/Application

Shielded	No
Circuit Application	Power & Signal

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量超出标准 Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) SVHC > Threshold: Pb (1.2% in CONTACTS) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 245°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts


D369-HR33-NP0

3 Position, Receptacle, Connector Assembly, Crimp, Wire-to-Wire, Gold (Au), Normal, 2.54 mm [.1 in] Centerline, 1 Row, 400 VAC, Sealable, DEUTSCH 369



TE Part # YD369-HP33-NS00000
369 HARSH 3 WAY PLUG, SKT -
BACC65CP1SN


Also in the Series | **DEUTSCH 369**

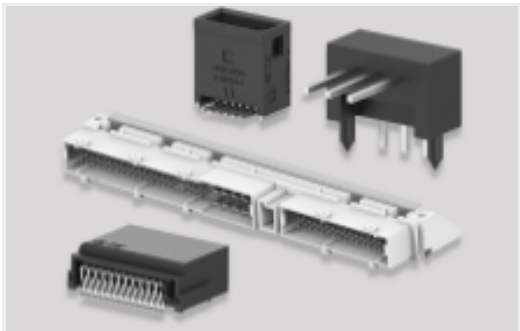


PCB Headers & Receptacles(91)



Rectangular Power Connectors(403)

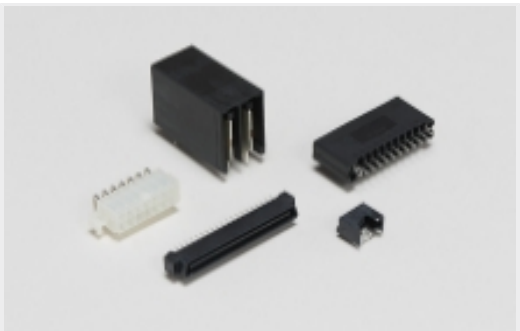

Standard Rectangular Connectors(358)

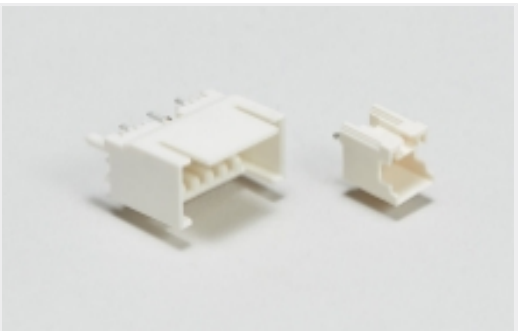


Wire-to-Board Headers & Receptacles
(91)


Customers Also Bought



TE Part #3573650001
TMS-SCE-3/16-2.0-S1-9

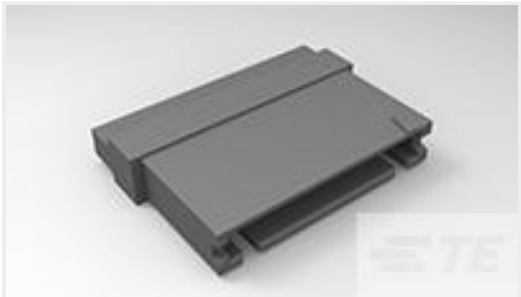

TE Part #485893-9
011 HOUSING FFC PIN 100CL SR

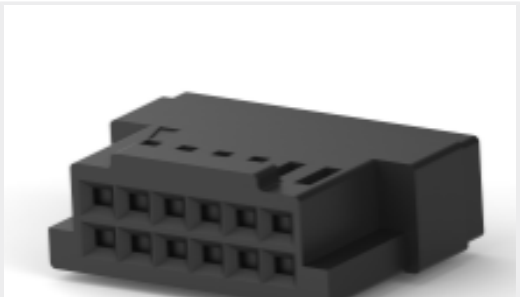


TE Part #CAT-F439-R2435254
2.54mm FFC Connectors Receptacle
Housing



TE Part #487545-2
005 HOUSING FFC RCPT 050CL SR



TE Part #2344654-3
WLAN DUAL BAND ANTENNA PCB V
150mm



TE Part #496749N002
202D121-4-60-0-CS5077



TE Part #505309M258
RNF-100-1/4-BK-SP-CS5004



TE Part #5053044177
RNF-100-3/16-BK-SP

Documents

Product Drawings

369 HARSH 3 WAY REC, PIN - BACC65CR1PN

English

CAD Files

Customer View Model

ENG_CVM_CVM_YD369-HR33-NP00000_AB.2d_dxf.zip

D369-HR33-NP0

3 Position, Receptacle, Connector Assembly, Crimp, Wire-to-Wire, Gold (Au), Normal, 2.54 mm [.1 in] Centerline, 1 Row, 400 VAC, Sealable, DEUTSCH 369



English

Customer View Model

[ENG_CVM_CVM_YD369-HR33-NP00000_AB.3d_igs.zip](#)

English

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_YD369-HR33-NP00000_AB.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.