

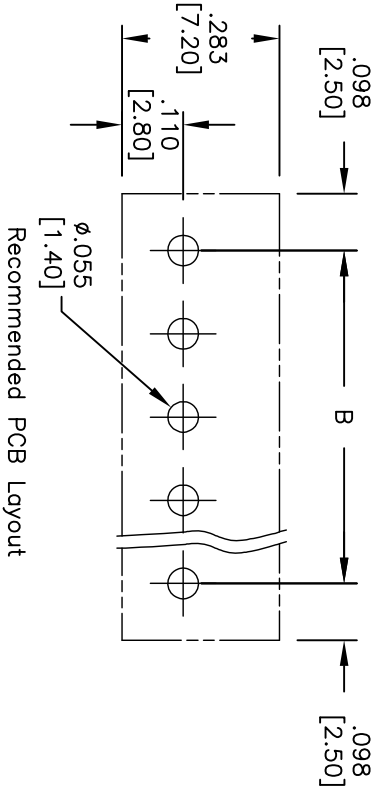
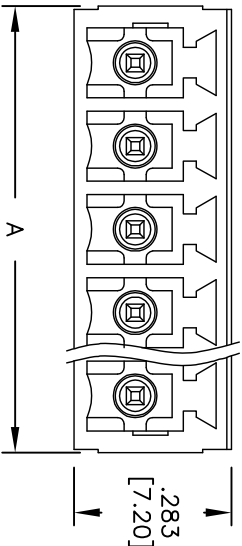


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-	9427	RELEASED	3/06/09	
A	-	REDRAWN	7/11/11	

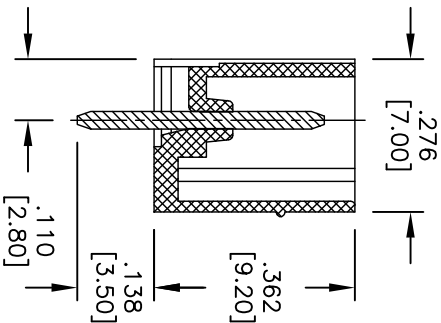

Recommended PCB Layout

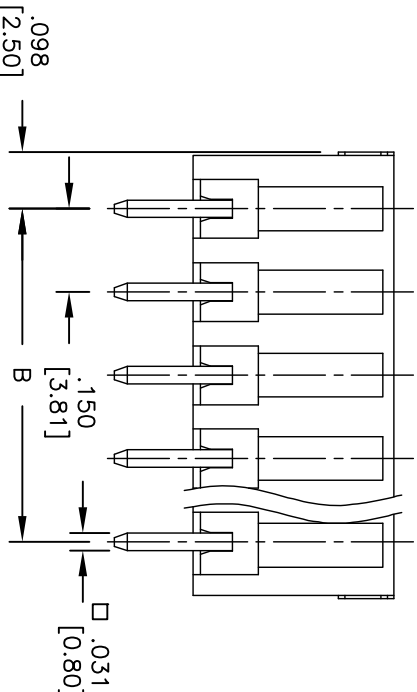

Poles	Tolerance
2-6P	±.006 [0.15]
7-12P	±.008 [0.20]
13-18P	±.010 [0.25]
19-24P	±.012 [0.30]

SPECIFICATIONS:

Material: Insulator: Thermoplastic, rated UL 94V-0
Insulator color: Green
Contact: Copper Alloy, Tin plated.
Electrical:
Operation voltage: 300 VAC
Current rating: 10 Amps
Mechanical:
Withstanding Voltage: 1.6KV
Environmental:
Operating temperature: -40°C to +115°C
Lead free, RoHS compliant.

Poles: 2 thru 24
A = .150 [3.81] X No. of Spaces + .197 [5.00]
B = .150 [3.81] X No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM TOLERANCES: EXCEPT AS NOTED INCHES	
.X ± .10 .XX ± .020 .XXX ± .015	ØX ± .10 ØXX ± .015 ØXXX ± .010
APPROVALS	DATE
DRAWN	DRY
CHECKED	
APPROVED	

TITLE .150 [3.81] PITCH, TERMINAL BLOCK, VERTICAL	
909 Railway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
SIZE	PART NO.
X	EB3-XX-B-180
REV.	A



ADAM TECH