

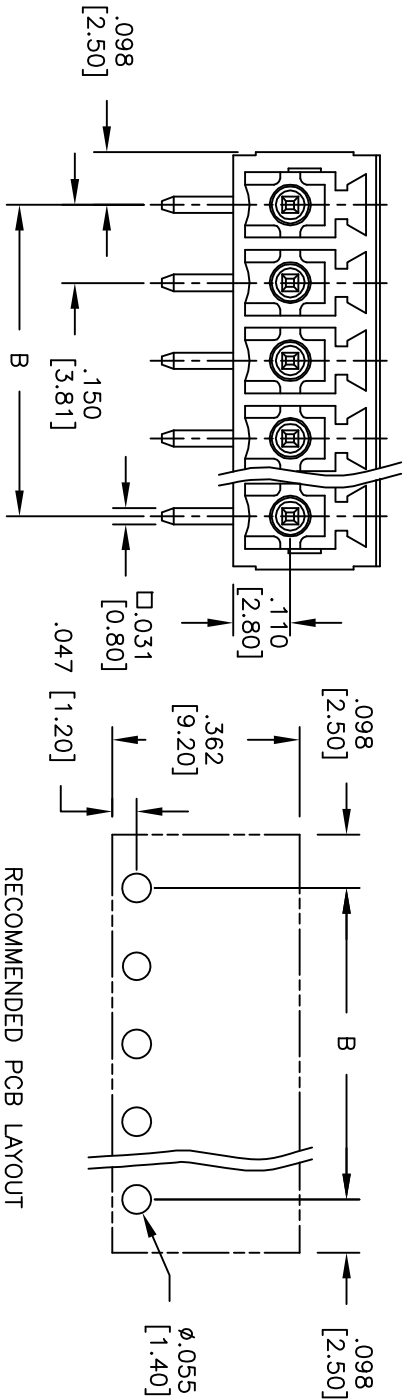


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/22/09	
A		REVISED SHAPE	7/21/11	

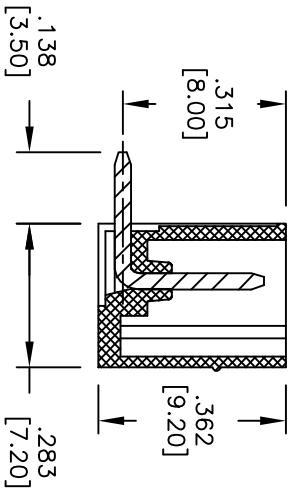

RECOMMENDED PCB LAYOUT

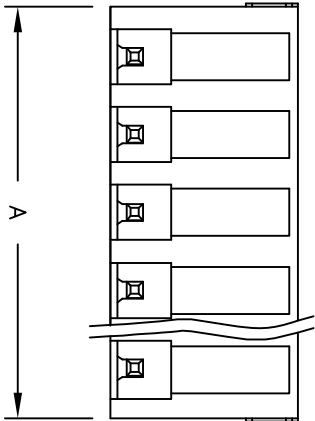

POLES	Tolerance
2-6P	±.006 [0.15]
7-12P	±.008 [0.20]
13-18P	±.010 [0.25]
19-24P	±.012 [0.30]

Poles: 2 thru 24
A= .150 [3.81] x No. of (Poles - 1) + .197 [5.00]
B= .150 [3.81] x No. of (Poles - 1)

SPECIFICATIONS:
Material:
Insulator: Thermoplastic, rated UL 94V-0
Insulator color: Green
Contact: Copper alloy, Tin plated
Electrical:
Operation voltage: 300 VAC max
Current rating: 10 Amps max
Withstanding voltage: 1.6kv
Environmental:
Operating temperature: -40°C to +115°C
Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES		HOLE		DATE	
.X	±.10	ØX	±.10		
.XX	±.020	ØXX	±.015		
.XXX	±.015	ØXXX	±.010		
APPROVALS		DATE			
DRAWN		DY		10/22/09	
CHECKED					
APPROVED					

ADAM TECH
909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

.150 [3.81] TERMINAL BLOCK

SIZE	PART NO.	REV.
X	EB3-XX-B	A
REF:	S00007T	SCALE: NTS
		SHEET 1 OF 1